



KTS-MW3-12V-PKO /X

LED MICROWAVE OCCUPANCY/DAYLIGHT SENSOR

DESCRIPTION

LED Microwave Occupancy/Daylight Sensor | Pre-wired for Quick Installation | Performance Parameters Set by Remote Control (sold separately)

INPUT VOLTAGE: 12Vdc \pm 2Vdc

MICROWAVE FREQUENCY: 5.8 GHz \pm 75MHz

OUTPUT VOLTAGE: 0–10Vdc

TRANSMIT POWER: 1mW max.



RoHS Compliant



5 YEAR WARRANTY

PRODUCT FEATURES

- Partial discharge (PD) dual-technology differentiates artificial light brightness from natural light and automatically turns off light when ambient brightness exceeds preset lux level
- Microwave sensing technology detects motion in the coverage area and automatically turns off light when motion is no longer detected
- Pre-wired for quick installation
- Powered by Keystone 0–10V dimming LED driver
- Adjustable performance parameters set by Keystone remote control (sold separately)
- Ambient operating temperature: $-25^{\circ}\text{C}/-13^{\circ}\text{F}$ to $60^{\circ}\text{C}/140^{\circ}\text{F}$

PERFORMANCE SPECIFICATIONS

| Microwave Frequency | Input Voltage | Input Current | Output Voltage | Transmit Power | Stand-By Power | Max Mounting Height | Detection Angle | Detection Range | Adjustable Settings | | | | | |
|---------------------|---------------|---------------|----------------|----------------|----------------|-----------------------|-----------------|---|---------------------------|---------------------------|-------------------------------------|--|--------------------------------|--------------------------|
| | | | | | | | | | Brightness | Sensitivity | Hold Time | Daylight Threshold | Stand-By Time | Stand-By Dimming Level |
| 5.8GHz | 12Vdc | 30mA | 0–10V | 1mW | <0.5W | 49 ft (ceiling mount) | 30°–150° | Ceiling mount: Ø 49 ft max Wall mount: 65 ft max | 70% 80% 90% 100% | 20% 50% 75% 100% | 10 sec 1 min 10 min 30 min | 10 Lux 30 Lux 50 Lux 100 Lux Disable | 1 min 30 min 60 min ∞ | 10% 20% 30% 50% |

FACTORY PRESETS

| Catalog Number | Stand-By Dim Level | Hold Time | Daylight Threshold | Stand-By Time |
|--------------------|--------------------|-----------|--------------------|---------------|
| KTS-MW3-12V-PKO | 50% | 10 min | Disabled | ∞ |
| KTS-MW3-12V-PKO /A | 30% | 1 min | Disabled | 3 min |
| KTS-MW3-12V-PKO /B | 10% | 5 min | Disabled | 10 min |

STARTUP BEHAVIOR

When fixture power is applied, the below startup sequence occurs


1. Light output 100%, red indicator on
2. After 10s, light output 50% (0% for /A and /B configurations), red indicator off
3. Sensor is now ready for normal operation



KTS-MW3-12V-PKO / X


LED MICROWAVE OCCUPANCY/DAYLIGHT SENSOR

PHYSICAL SPECIFICATIONS

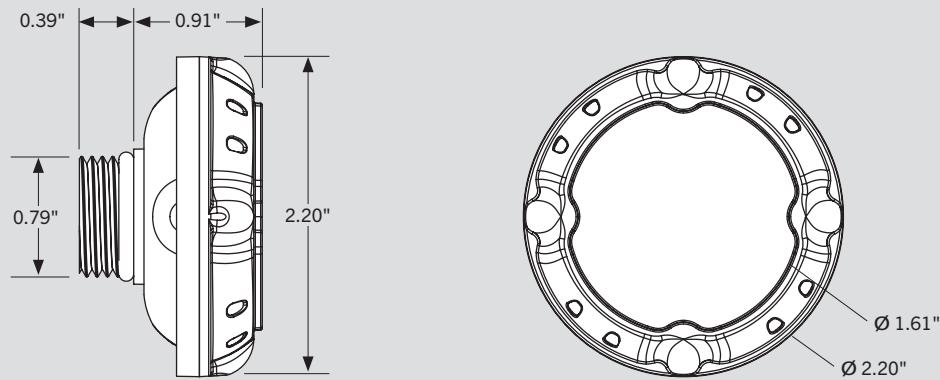


DETECTION COVERAGE

CEILING MOUNT (Top View)

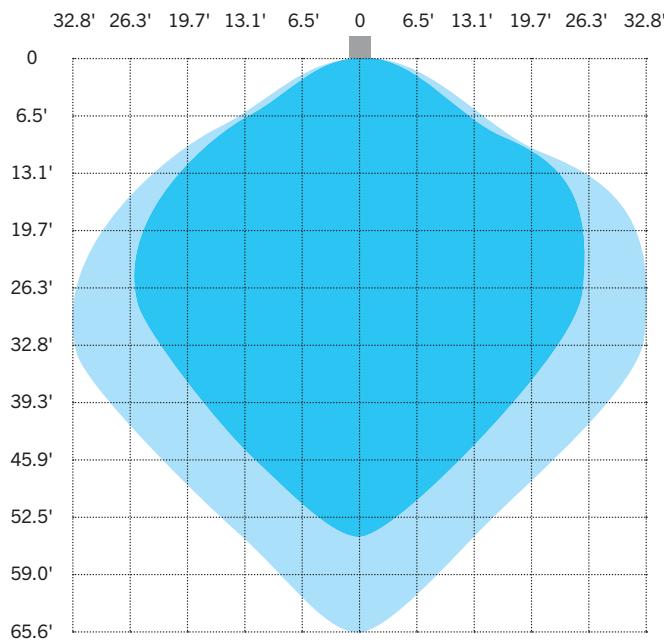

WALL MOUNT (Top View)

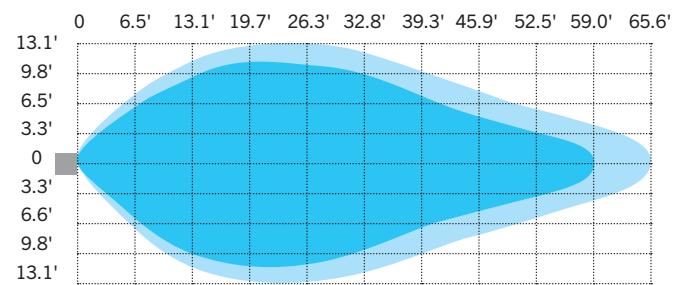

■ Well-covered ■ Covered



KTS-MW3-12V-PKO / X

LED MICROWAVE OCCUPANCY/DAYLIGHT SENSOR


LUX ON/OFF SETTING

FUNCTION


Partial discharge (PD) dual-technology differentiates artificial light brightness from natural light and automatically turns off light when ambient brightness exceeds preset lux level.

Lux-Off function preconditions:


- Stand-by period setting: ∞
- Stand-by dimming level setting: 10%, 20%, 30%, or 50%
- Daylight threshold setting: 10 Lux, 30 Lux, 50 Lux, or 100 Lux

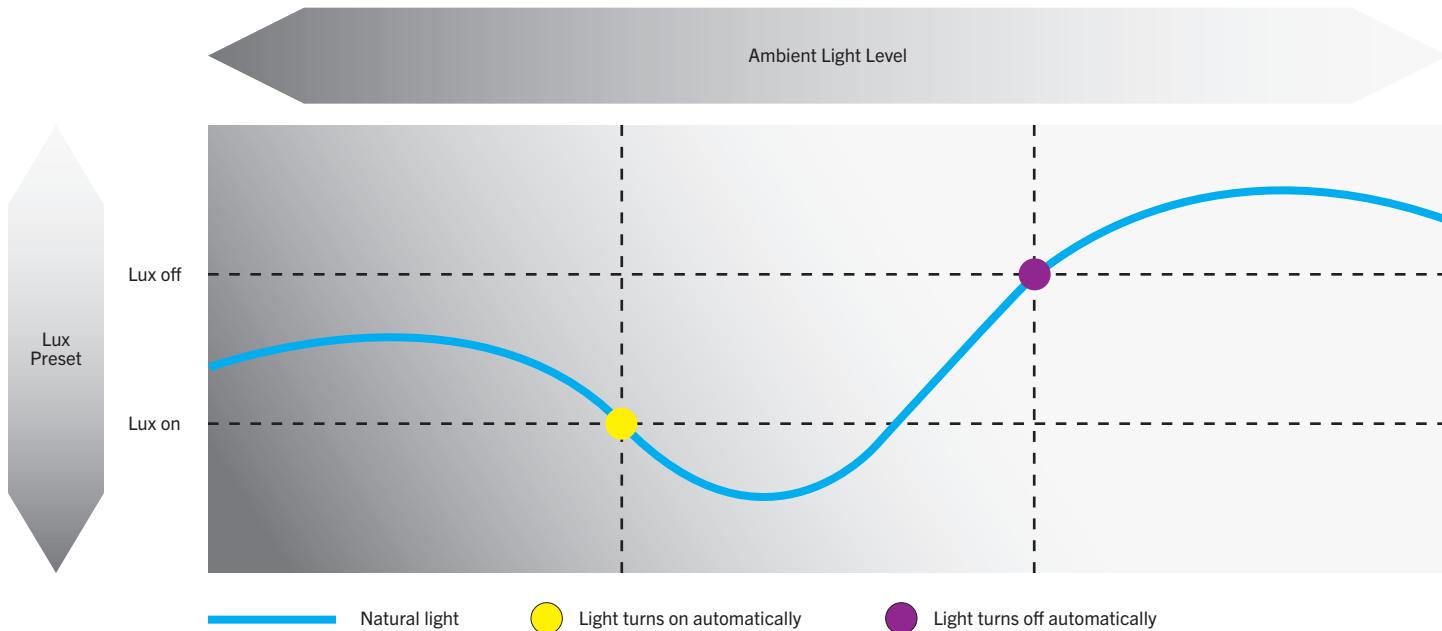


APPLICATION

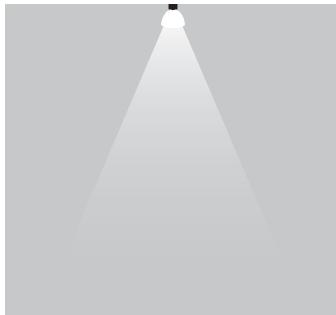


When ambient light is lower than preset lux level, lighting will turn on and remain at preset stand-by dimming level.

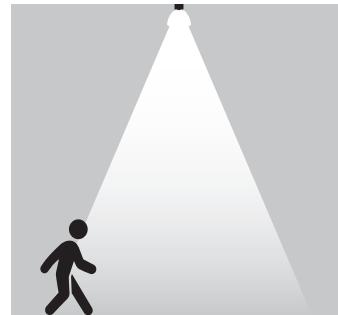

With insufficient ambient light, when motion is detected, lighting will turn on and remain at preset brightness level until motion is no longer detected for duration of preset hold time.

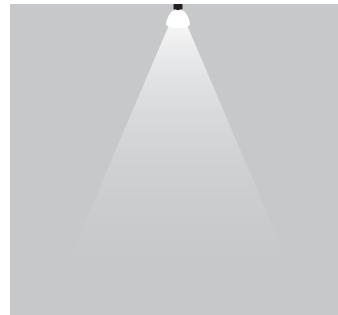

If no further motion is detected after duration of hold time, lighting will dim and remain at preset brightness level for duration of stand-by time or until ambient light level exceeds preset lux level.



When ambient light reaches preset lux level, lighting will turn off and remain off until ambient light level falls below preset lux level.




KTS-MW3-12V-PKO /X

LED MICROWAVE OCCUPANCY/DAYLIGHT SENSOR

INSTALLATION

1. Ensure power is off to the fixture.
2. Remove 1/2" knock-out (KO) plug next to the Keystone emblem on the driver access door.
3. Screw in sensor head.
4. Re-connect power when ready.

(see illustrations below)

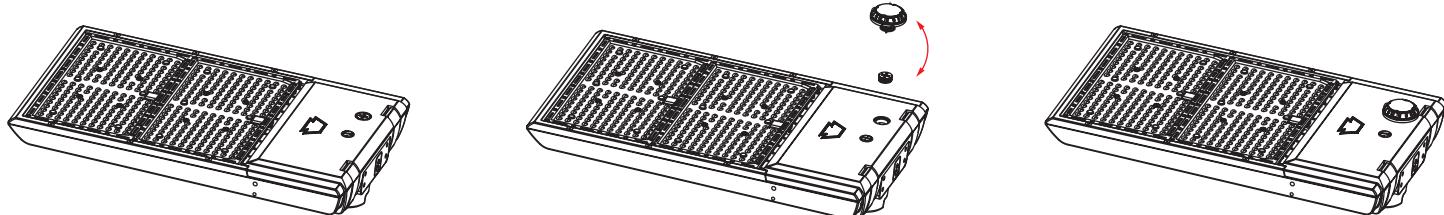

5. Program desired settings as needed with Keystone Remote Control.

ACCESSORY (SOLD SEPARATELY)

REMOTE CONTROL

| Catalog Number | Description | UPC | Easy Code |
|-----------------------|---|--------------|-----------|
| KTS-MW3-REMOTECOMTROL | Remote Control for KTS-MW3-XX Sensors, Sets/adjusts all sensor performance parameters | 843654132020 | XSR-61 |



ORDERING INFORMATION

| ORDER CODE | PACK QTY. | UPC | Easy Code |
|--------------------|-----------|--------------|-----------|
| KTS-MW3-12V-PKO | 1 | 843654135212 | TRM-32 |
| KTS-MW3-12V-PKO /A | 1 | 843654133317 | XYR-25 |
| KTS-MW3-12V-PKO /B | 1 | 843654133324 | SPF-37 |

CATALOG NUMBER BREAKDOWN

KTS-MW3-12V-PKO /X

1 2 3 4 5 6

- 1 Keystone Technologies Sensor
- 2 Microwave Sensor Form Factor
- 3 Input Voltage—12V
- 4 Pin Connection
- 5 Knock Out
- 6 Preset Configuration Style

6 Preset Configuration Style

| | |
|-------|-------------------------|
| Blank | Standard Factory Preset |
| /A | Factory Preset A |
| /B | Factory Preset B |