

Single Pole Devices and Temporary Power

150A, 600V AC/250V DC

Male Receptacles



Ordering Information

Description	Device Color	UPC	Catalog Number
150 amp Panel Mount, Stud Type 1 1/16" x 3/4",thermoplastic	Green	783585458267	HBL15MRSGN




Standards

UL and cUL Listed
UL Enclosure Types 3R, 4X, 12
National Electric Code (NEC), ANSI/NFPA 70

Specifications

Base Compound	Thermoplastic Elastomer (TPE)
Contact Material	Brass
Retaining Screw Material	Nylon
Mounting Hole	3x Ø .20"
Termination	5/16-18 Threaded Stud

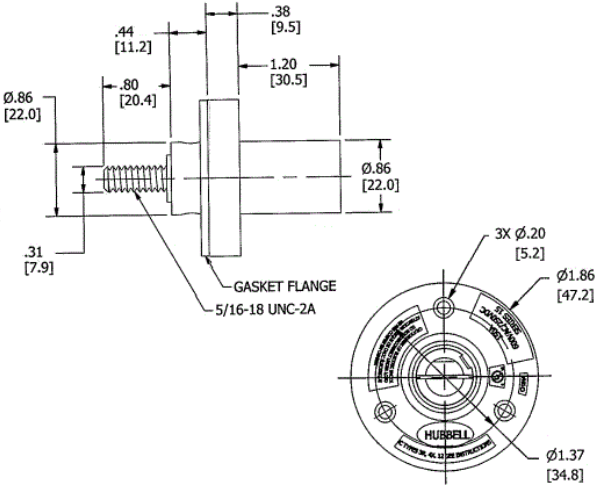

Performance

Electrical	
Amperage Rating	150A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
Mechanical	
Product Identification	Ratings are a permanent part of device
Terminal Accommodation	#8 to #2 AWG

Online Resources

Customer Use Drawing
eCatalog
Installation Instructions

