

Meter Centres

240V Modular Meter Centres

Selection

Sub-service Circuit Breakers - Maximum interruption rating (KAIC) for 240V AC

Ampere Rating	Poles	Catalogue Number						
		KAIC = 10kA		KAIC = 22kA		KAIC = 42kA	KAIC = 65kA	
		Plug-in	Bolt-on	Plug-in	Bolt-on	Bolt-on only	Plug-in	Bolt-on
60A	2 3	Q260 Q360	BQ2B060 BQ3B060	Q260H Q360H	BQ2B060H BQ3B060H	QJ22B060H QJ23B060H	Q260HH Q360HH	HB2B060 HB3B060
70A	2 3	Q270 Q370	BQ2B070 BQ3B070	Q270H Q370H	BQ2B070H BQ3B070H	QJ22B070H QJ23B070H	Q270HH Q370HH	HB2B070 HB3B070
80A	2 3	Q280 Q380	BQ2B080 BQ3B080	Q280H Q380H	BQ2B080H BQ3B080H	QJ22B080H QJ23B080H	Q280HH Q380HH	HB2B080 HB3B080
90A	2 3	Q290 Q390	BQ2B090 BQ3B090	Q290H Q390H	BQ2B090H BQ3B090H	QJ22B090H QJ23B090H	Q290HH Q390HH	HB2B090 HB3B090
100A	2 3	Q2100 Q3100	BQ2B100 BQ3B100	Q2100H or EQ9675 Q3100H	BQ2B100H BQ3B100H	QJ22B100H QJ23B100H	Q2100HH Q3100HH	HB2B100 HB3B100 or HQJ23B100
110A	2 3	Q2110 Q3110	BQ2B110 QJ23B110	Q2110H Q3110H	BQ2B110H QJH23B110	QJ22B110H QJ23B110H	Q2110HH Q3110HH	HB2B110 HQJ23B110
125A	2 3	Q2125 N/A	BQ2B110 QJ23B125	Q2125H or EQ9677 N/A	BQ2B125H QJH23B125	QJ22B125H QJ23B125H	Q2125HH N/A	HB2B125 HQJ23B125
150A	2 3	EQ9683 N/A	QJ22B150 QJ23B150	EQ9683 N/A	QJH22B150 QJH23B150	QJ22B150H QJ23B150H	N/A	N/A HQJ23B150
175A	2 3	N/A	QJ22B175 QJ23B175	EQ9684 N/A	QJH22B175 QJH23B175	QJ22B175H QJ23B175H	N/A	N/A HQJ23B175
200A	2 3	EQ9685 N/A	QJ22B200 QJ23B200	EQ9685 N/A	QJH22B200 QJH23B200	QJ22B200H QJ23B200H	N/A	N/A HQJ23B200

Note: Low amperage circuit breakers (15-50A) available with installation of connector kit #MSMK-50

Corner Elbow Modules - Permit continuation from stack to stack around corners

System Voltage	Ampere Rating	Catalogue Number	Dimensions - Inches (mm)			Weight - lbs.(kg)
			H	W	D	

Inside Elbow Modules


120/240 1Ø3W	600	MEL1-IN-6	16 (406)	12 (304)	7 1/4 (184)	45 (20)
	1200	MEL1-IN-12				
120/208 3Ø4W	600	MEL3-IN-6				50 (23)
	1200	MEL3-IN-12				

Outside Elbow Modules

120/240 1Ø3W	600	MEL1-OUT-6	16 (406)	12 (304)	7 1/4 (184)	45 (20)
	1200	MEL1-OUT-12				
120/208 3Ø4W	600	MEL3-OUT-6				50 (23)
	1200	MEL3-OUT-12				

Note: To connect a Tap Box to an Elbow, order MTBELK6 or MTBELK12. Connection from feed-through tap box 1200A to an elbow is not possible.

Inside

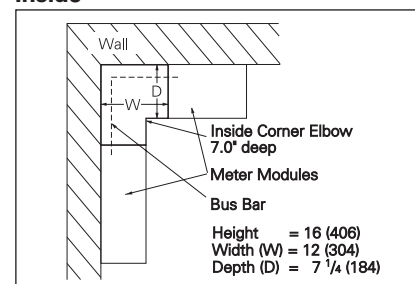

Outside

