


## TDR SERIES

### Relay Output, Recycling Time Delay Relay



8-PIN

### Wiring Diagram



Relay contacts are isolated

### Description

The TDR Series of time-delay relays are comprised of digital circuitry and an isolated, 10A relay output. The ON and OFF delays are selected by means of two, ten position binary switches, which allow the setting of the desired delay to be precise every time.

#### Operation (Recycling - ON Time First)

Upon application of input voltage, the green LED glows, the output relay is energized, the red LED glows, and the T1 ON time begins. At the end of the ON time, the output de-energizes, the red LED turns OFF and the T2, OFF time begins. At the end of the OFF time, the output relay energizes and the cycle repeats as long as input voltage is applied.

**Reset:** Removing input voltage resets the output and time delays, and returns the sequence to the first delay.

#### Operation (Recycling - OFF Time First)

Upon application of input voltage, the green LED glows, the T1 OFF time begins, the load is OFF. At the end of the OFF time, the T2 ON time begins, the load energizes, and the red LED glows. At the end of the ON time the load de-energizes and the red LED turns OFF. The cycle repeats until input voltage is removed.

**Reset:** Removing input voltage resets the output and the sequence to the OFF time.

### Features & Benefits

| FEATURES                                      | BENEFITS                                                                                                            |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>ON &amp; OFF time delay settings</b>       | Independent adjustment allows for greater flexibility                                                               |
| <b>3 Time Ranges Available (0.1s to 2.8h)</b> | Makes it versatile for use in many applications                                                                     |
| <b>Microcontroller based</b>                  | Repeat Accuracy + / - 0.1% or 20 ms, whichever is greater; Setting Accuracy + / - 2% or 50 ms, whichever is greater |
| <b>DIP switch adjustment</b>                  | Provides first time setting accuracy                                                                                |
| <b>Isolated output contacts</b>               | Allows control of loads for AC or DC voltages                                                                       |
| <b>LED indication (select models)</b>         | Provides visual indication of relay status                                                                          |


### Ordering Information

| MODEL   | INPUT VOLTAGE | LED | SEQUENCE       | ON TIME (SEC)                | OFF TIME (SEC)               |
|---------|---------------|-----|----------------|------------------------------|------------------------------|
| TDR1A22 | 12VDC         |     | ON time first  | 1-1023 in 1s increments      | 1-1023 in 1s increments      |
| TDR2A23 | 24VAC         | X   | ON time first  | 1-1023 in 1s increments      | 10-10230 in 10s increments   |
| TDR4A11 | 120VAC        | X   | ON time first  | 0.1-102.3 in 0.1s increments | 0.1-102.3 in 0.1s increments |
| TDR4A12 | 120VAC        | X   | ON time first  | 0.1-102.3 in 0.1s increments | 1-1023 in 1s increments      |
| TDR4A13 | 120VAC        | X   | ON time first  | 0.1-102.3 in 0.1s increments | 10-10230 in 10s increments   |
| TDR4A22 | 120VAC        | X   | ON time first  | 1-1023 in 1s increments      | 1-1023 in 1s increments      |
| TDR4A23 | 120VAC        | X   | ON time first  | 1-1023 in 1s increments      | 10-10230 in 10s increments   |
| TDR4A33 | 120VAC        | X   | ON time first  | 10-10230 in 10s increments   | 10-10230 in 10s increments   |
| TDR4B22 | 120VAC        | X   | OFF time first | 1-1023 in 1s increments      | 1-1023 in 1s increments      |
| TDR4B23 | 120VAC        | X   | OFF time first | 1-1023 in 1s increments      | 10-10230 in 10s increments   |
| TDR6A22 | 230VAC        | X   | ON time first  | 1-1023 in 1s increments      | 1-1023 in 1s increments      |

If you don't find the part you need, call us for a custom product 800-843-8848

## TDR SERIES

### Accessories



#### BZ1 Front Panel Mount Kit

Provides an easy method of through-the-panel mounting of 8- or 11-pin plug-in timers, flashers, and other controls.



#### NDS-8 Octal 8-pin Socket

8-pin 35mm DIN rail or surface mount. Rated at 10A @ 300VAC. Surface mounted with two #6 (M 3.5 x 0.6) screws or snaps onto a 35 mm DIN rail. Uses PSC8 hold-down clips.



#### PSC8 Hold-down Clips

Securely mounts plug-in controls in any position. Provides protection against vibration. Use with NDS-8 Octal Socket. Sold in pairs.



#### C103PM (AL) DIN Rail


35 mm aluminum DIN rail available in a 36 in. (91.4 cm) length.

### Binary Switch Operation

| 0.1...102.3 | 1...1023 | 10...10,230 |
|-------------|----------|-------------|
| OFF ▶ ON    | OFF ▶ ON | OFF ▶ ON    |
| 0.1         | 1        | 10          |
| 0.2         | 2        | 20          |
| 0.4         | 4        | 40          |
| 0.8         | 8        | 80          |
| 1.6         | 16       | 160         |
| 3.2         | 32       | 320         |
| 6.4         | 64       | 640         |
| 12.8        | 128      | 1280        |
| 25.6        | 256      | 2560        |
| 51.2        | 512      | 5120        |
| 6.3 S       | 544 S    | 3000 S      |

\*\* For CE approved applications, power must be removed from the unit when a switch position is changed.

### Function Diagram

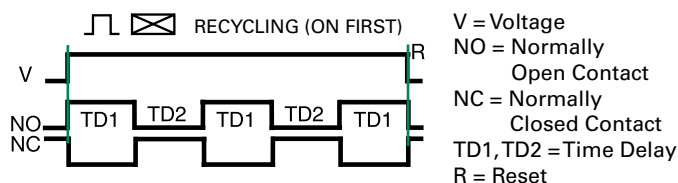

### Specifications

#### Time Delay

##### Type

##### Range\*\*

Digital integrated circuitry  
 0.1 - 102.3s in 0.1s increments  
 1 - 1023s in 1s increments  
 10 - 10,230s in 10s increments  
 ±0.1% or 20ms, whichever is greater  
 ±2% or 50ms, whichever is greater  
 ≤ 50ms  
 ≤ 150ms

#### Repeat Accuracy

#### Setting Accuracy

#### Reset Time

#### Recycle Time

#### Time Delay vs Temp.

#### & Voltage

±5%

#### Input

#### Voltage

#### Tolerance

#### 12VDC & 24VDC/AC

#### 110 to 230VAC/DC

#### AC Line Frequency/DC Ripple

#### Power Consumption

#### Input LED Indicator

#### Output

#### Type

#### Form

#### Rating

12, 24/28, or 110VDC; 24, 120, or 230VAC

-15% - 20%

-20% - 10%

50/60 Hz/≤10%

≤ 3.25W

Green; on when input voltage is applied

Electromechanical relay

DPDT

10A resistive @ 120/240VAC & 28VDC;

1/3 hp @ 120/240VAC

Mechanical - 1 x 10<sup>7</sup>; Electrical - 1 x 10<sup>6</sup>

250VAC

Red; ON when output relay energizes

#### Life

#### Max. Switching Voltage

#### Relay LED Indicator

#### Protection

#### Isolation Voltage

#### Insulation Resistance

#### Polarity

#### Mechanical

#### Mounting

#### Dimensions

≥ 1500V RMS input to output

≥ 100 MΩ

DC units reverse polarity protected

Plug-in socket

**H** 81.3 mm (3.2"); **W** 60.7 mm (2.39");

**D** 45.2 mm (1.78")

Octal 8-pin plug-in

#### Termination

#### Environmental

#### Operating/Storage

#### Temperature

#### Weight

-20° to 65°C/-30° to 85°C

≈ 6 oz (170 g)