



PTTR26262HG



PTTR26362HG


## PlugTail™. The fastest, most consistent and reliable wiring devices – ever.

PTTR26262HG, PTTR26362HG

Factory-terminated devices and connectors mean that device installation is the same regardless of skill level of the installer. The UL-Listed connectors are keyed to ensure proper wiring installation into each extra heavy-duty receptacle. The connector simply snaps into the back of the device — no fussing with wires, stripping, or tightening screws. PlugTail devices are finger safe with no exposed terminals, so taping is not required.

A sturdy mechanical shutter system helps prevent children from sticking objects into the receptacle. The toughest and safest hospital grade tamper-resistant receptacle available.

## Features & Benefits

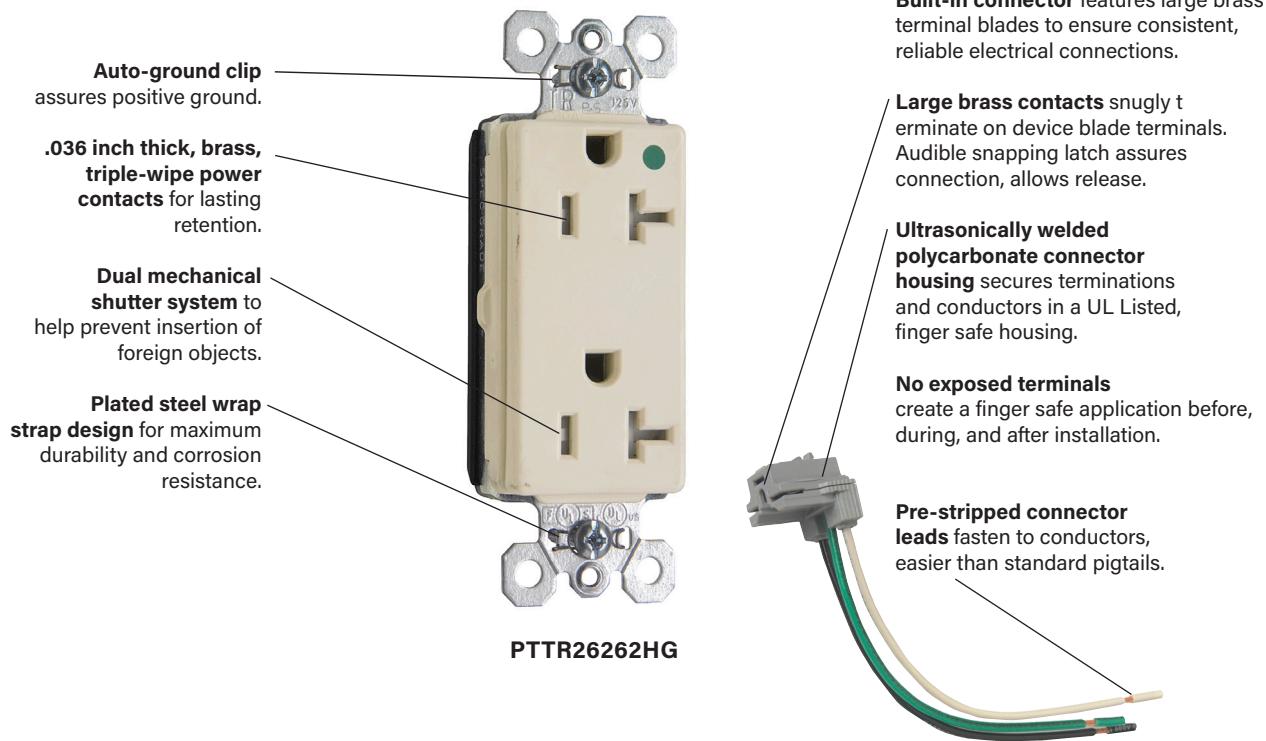

## 3rd Party Compliance



cULus Listed, File Number E140596, Standard UL498.  
 Federal Specification WC596.  
 Conforms to NEMA WD-1 and WD-6, Hospital Grade.

## Technical Information

### Performance

#### Electrical

Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30° C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

#### Mechanical

PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device

#### Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

#### Materials



Face	Nylon
Back Body	PVC
Assembly Drive Screw	Zinc-Plated Steel
Tamper Shutter	Thermoplastic
Line Contacts	.036 688 Brass
Auto-Ground Clip	Steel
Mounting Strap	.042 Zinc-Plated Steel
Mounting Screws	Tri-Drive Steel

#### PlugTail Connector Materials

Housing	Polycarbonate
Contacts	.030 Brass

#### Warranty


1 Year  
 C.O.O. Mexico

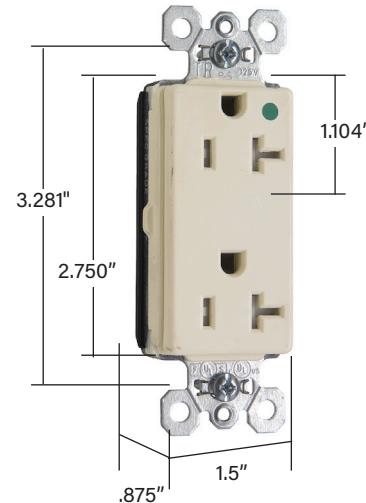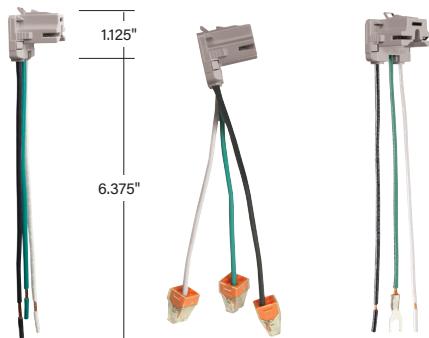

**Dimensions for  
 15 & 20 Amp  
 PTTR26362HG**

## Ordering Information

Catalog Number	Description	Rating		Color
		A.	V.	
<b>Hospital Grade Receptacles</b>				
<b>PT26362HGBL</b>	PT DUP DECO HG	20	125	Blue
<b>PT26362HGCDW</b>	PT DECO DUAL CONT	20	125	White
<b>PT26362HGGRY</b>	PT DUP DECO HG	20	125	Gray
<b>PT26362HGI</b>	PT DUP DECO HG	20	125	Brown
<b>PT26362HGLA</b>	PT DUP DECO HG	20	125	Light Almond
<b>PT26362HGOR</b>	PT DUP DECO HG	20	125	Orange
<b>PT26362HGRED</b>	PT DUP DECO HG	20	125	Red
<b>PT26362HGW</b>	PT DUP DECO HG	20	125	White
<b>PT26262HGGRY</b>	PT DUP DECO HG	15	125	Gray
<b>PT26262HGI</b>	PT DUP DECO HG	15	125	Ivory
<b>PT26262HGOR</b>	PT DUP DECO HG	15	125	Orange
<b>PT26262HGRED</b>	PT DUP DECO HG	15	125	Red
<b>PT26262HGW</b>	PT DUP DECO HG	15	125	White



Catalog Number	Wire Type	Wire Length
<b>PlugTail Connectors - Right Angle</b>		
<b>PTRA6SOL</b>	Solid	6"
<b>PTRA6STR</b>	Stranded	6"
<b>PTRA6SOLB25</b>	Solid	25"
<b>PTRA6STRB25</b>	Stranded	25"
<b>PlugTail Connectors - Right Angle with WAGO Connectors</b>		
<b>PTRA6SOLBP</b>	Solid	6"
<b>PTRA6STRBP</b>	Stranded	6"
<b>PlugTail Connectors - Right Angle with Ground Screw</b>		
<b>PTRA6SOLG</b>	Solid	6"
<b>PTRA6STRG</b>	Stranded	6"

## Vertical Markets

- **Health Care**
- **Education**
- **Institutional**

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.