

Twist-Lock® Devices
15A, 277V AC, 2 Pole, 3 Wire Grounding
Insulgrip® Plug

HUBBELL



Features

- Individually molded face for each blade configuration
- Roomy wiring chamber provides ample space for wiring
- Ribbed nylon housing provides a secure grip that's impact and chemical resistant



15A 277V AC
NEMA L7-15P
UL/CSA
2 HP



Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Insulgrip® angle plug, 8 position angle, black and white nylon	.325"-.655" (8.3-16.6)	783585171708	HBL4770CA

Listings

Listed to UL 498
Fed.Spec. W-C-596
Certified to CSA C22.2 No.42

Specifications

Housing / Cord Clamp	Nylon
Terminal Retainer	Clear polycarbonate
Blades	Brass
Terminal Screws	#8-32 Brass (Phillips / Slotted / Robertson)
Terminal Clamp	Cold rolled steel – nickel plated
Assembly Screws	Steel - nickel plated

Performance

Electrical

Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum


Mechanical

Terminal Accommodation	#16 AWG - #8 AWG stranded copper wire only.
------------------------	---

Terminal Identification	Terminals identified in accordance with UL 498
-------------------------	--

Environmental

Flammability	HB or better per UL94 or CSA 22.2 No. 0.6
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C Minimum -40°C (w/o impact)

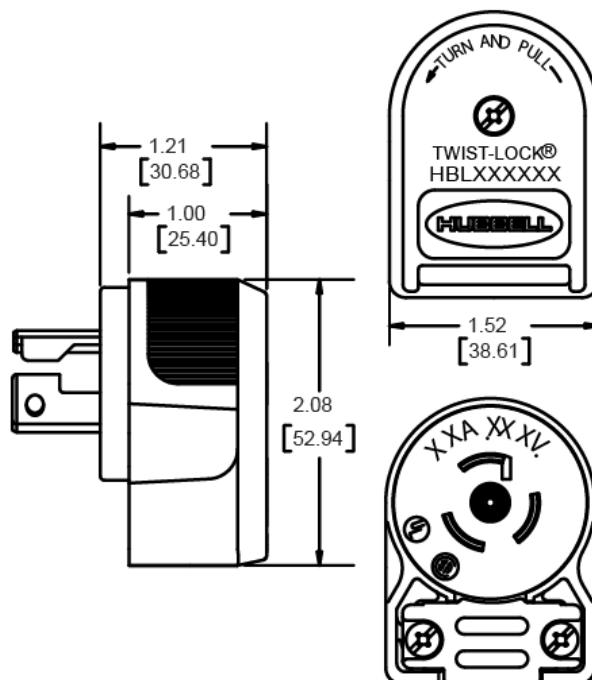

Accessories

Connector	HBL4779C
Duplex Receptacle	HBL4750
Single Receptacle	HBL4760
Flanged Receptacle	HBL4785C

Resources

Customer Use Drawing
eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.