



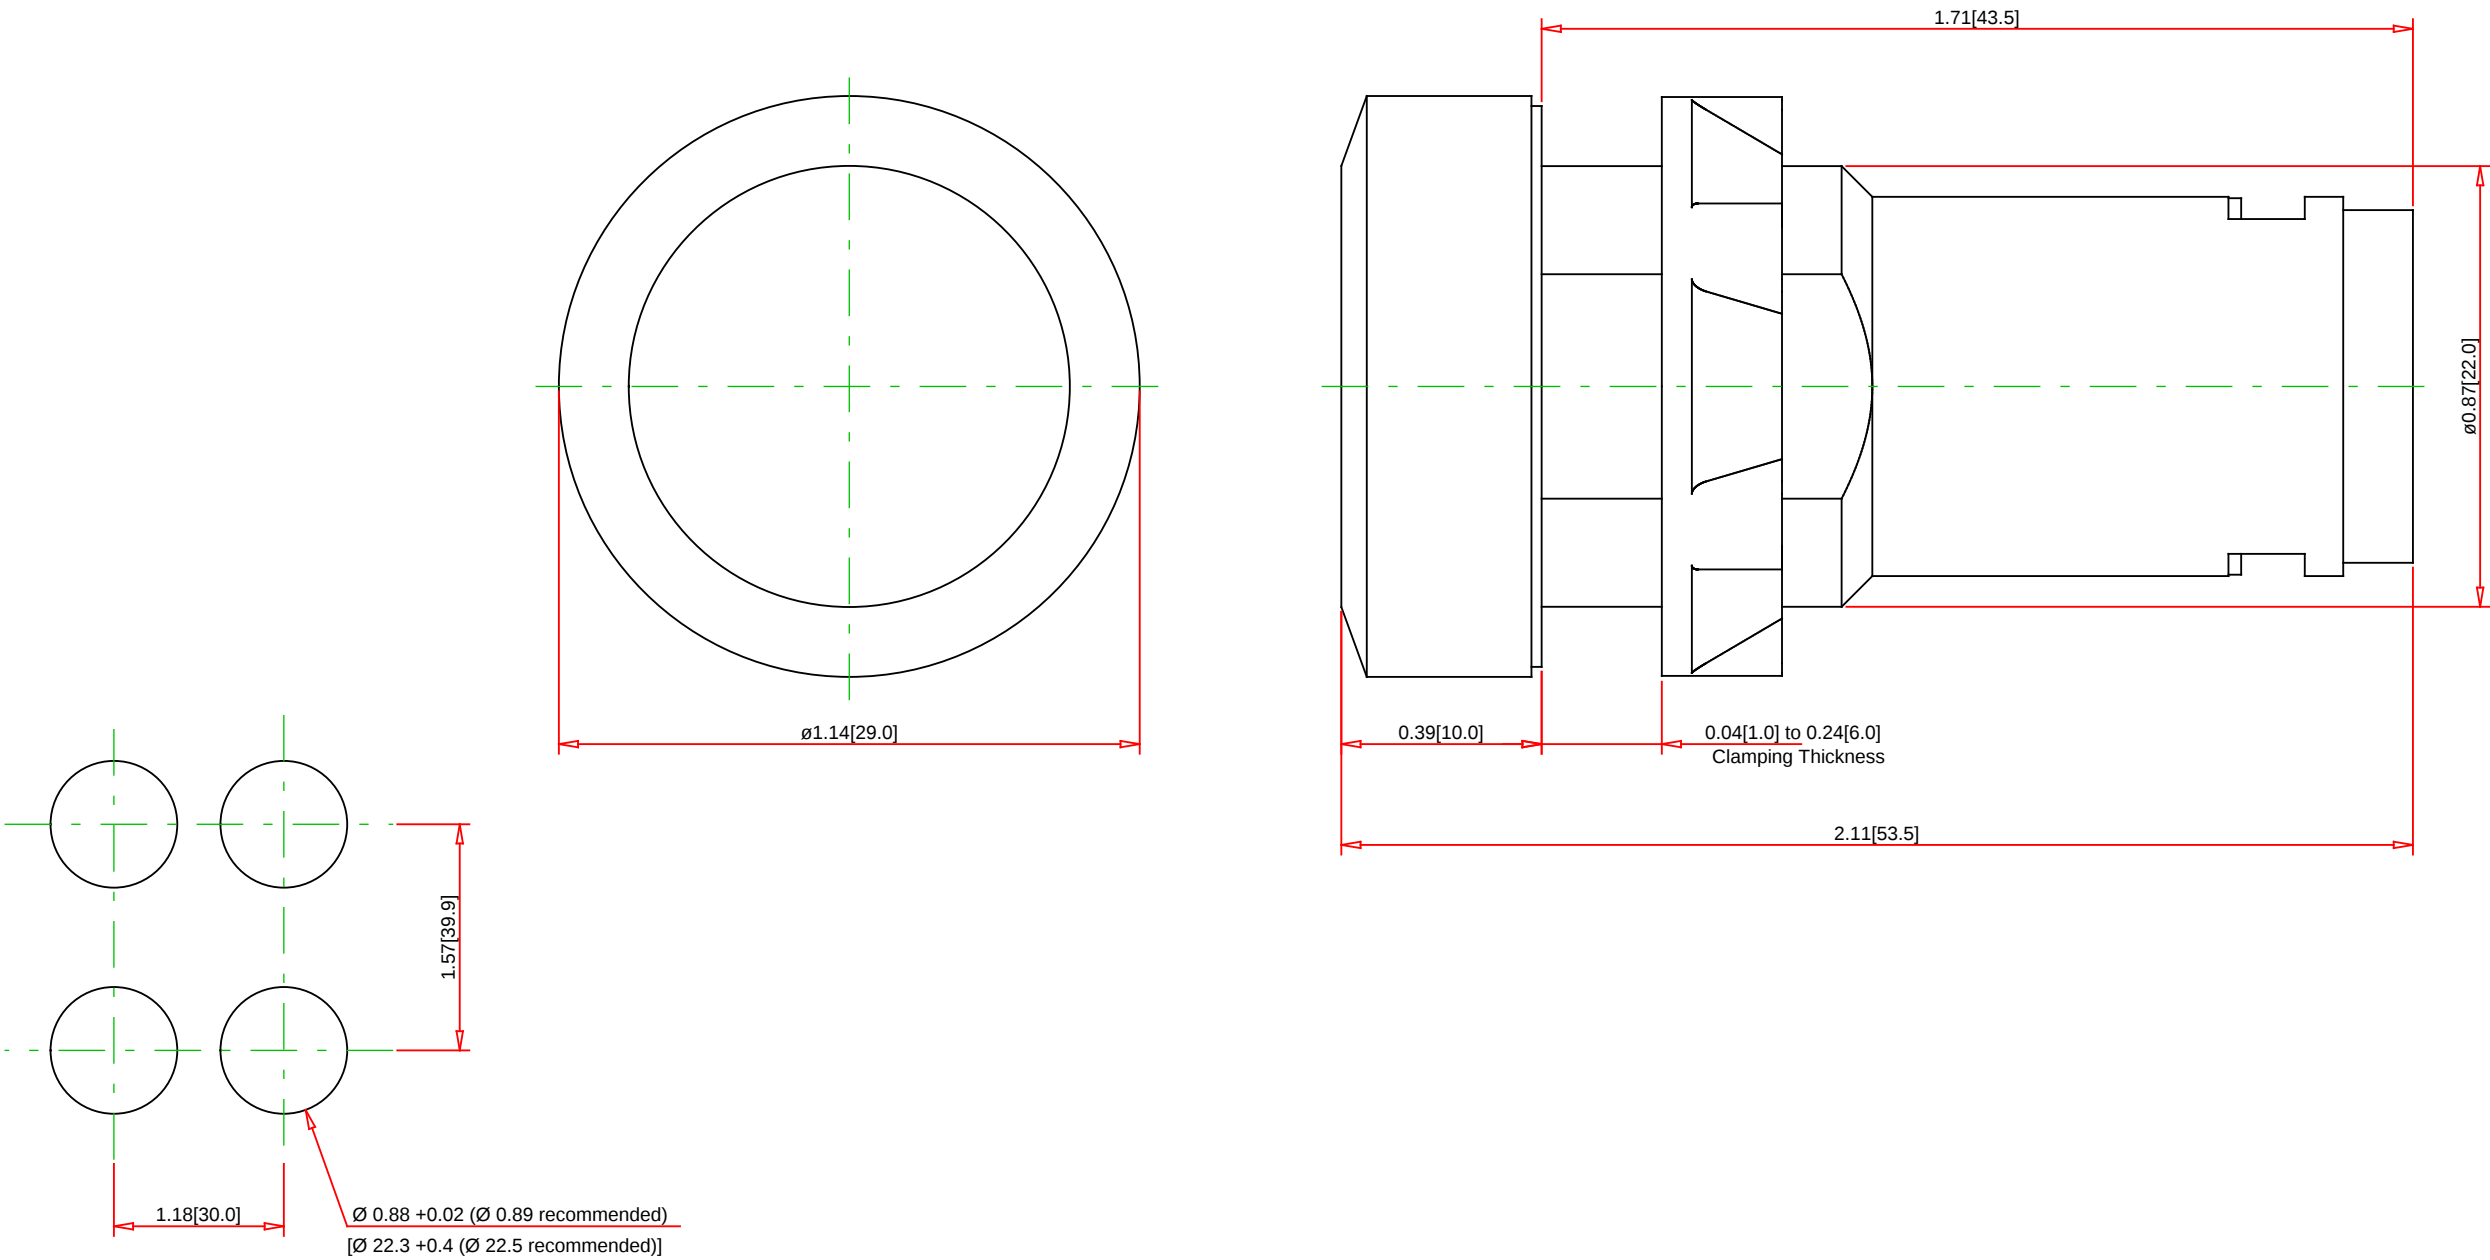

Note:  
- Drawings Not To Scale  
- Drawings Subject to Change Without Notice  
- Dimensions are inches next to [Millimeters]

Part No.:

**XB5EVG3**

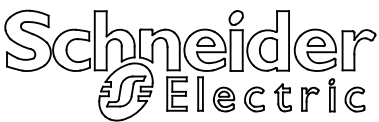

Schneider Electric United States  
North American Division  
Boston One Campus  
800 Federal Street  
Andover, MA 01810, USA  
Phone: +1 877 342 5173  
Email: CCC@us.schneider-electric.com

Technical Information:

|                                    |                                                                                                                       |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Supply Voltage (Input):            | 110-120VAC, 50/60Hz                                                                                                   |
| Supply Voltage Limits:             | 100-132 VAC                                                                                                           |
| Current Rating:                    | 14mA                                                                                                                  |
| Surge Withstand:                   | 1 kV conforming to IEC 61000-4-5                                                                                      |
| Bulb Type:                         | Protected and Integrated LED                                                                                          |
| Ambient Air Temp. (for storage):   | -40°C to 70°C                                                                                                         |
| Ambient Air Temp. (for operation): | -25°C to 70°C                                                                                                         |
| Conformity to Standards:           | EN/IEC 60947-1, EN/IEC 60947-5-1, UL508, CSA C22-2 n°14, IEC 61000-4-2, IEC 61000-4-3, IEC 6100-4-4, UL, FCC, CSA, CE |

Specification:

|                          |                                                                                                                                                                              |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description:             | 22mm Monolithic Pilot light, complete, 120V, Green                                                                                                                           |
| Vibration Resistance:    | 5 gn (f=12....500 Hz) conforming to IEC 60068-2-6                                                                                                                            |
| Shock Resistance:        | 37 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27, 50 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 |
| IK degree of Protection: | IK05 conforming to IEC 50102                                                                                                                                                 |
| Degree of Protection:    | IP66 conforming to IEC 60529, NEMA 4X, NEMA 13                                                                                                                               |
| Electric Service Life:   | 100,000 hours at rated voltage and at 25°C                                                                                                                                   |