

Combination Couplings

Liquidtight to Rigid

Features

- Raintight
- Liquidtight
- NPSM thread
- Labor saving

Applications

- Use to join liquidtight metal conduit (LFMC) to Rigid/IMC conduit between 2 different raceways
- Suitable for use in wet locations
- Raintight, concrete tight

Standard Material


- Steel

Standard Finish

- Zinc plated



UL standard 514B NEMA FB 1
Federal Spec A-A-50553

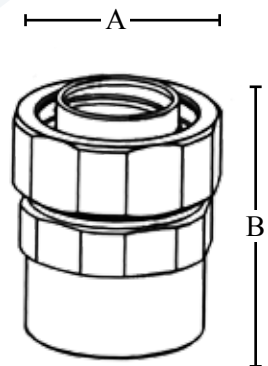

Catalog Number	UPC	Size	Unit Carton	Ship Case	Weight/Case	Inches	
						A	B
50SLT	87323	3/8"	20	200	33	1.10"	1.78"
51SLT	87324	1/2"	20	200	29	1.17"	1.78"
52SLT	87325	3/4"	10	100	23	1.43"	1.94"
53SLT	87326	1"	5	50	18	1.76"	2.19"
54SLT	87327	1-1/4"	5	50	30	2.16"	2.23"
55SLT	87328	1-1/2"	-	12	8	2.38"	2.62"
56SLT	87329	2"	-	5	5	2.87"	2.67"