


BDBMCS2N3, 3-Pole Flex Rated Power Distribution Block

By Burndy
Catalog # [BDBMCS2N3](#)

Distribution block, Three pole Open Style 14-2/0 AWG (Run), 14-2/0 AWG (Tap)

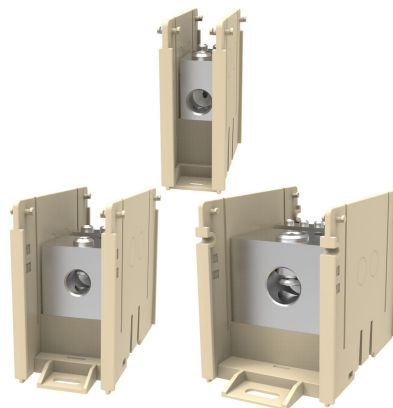

Features

- AL9CU dual rated for use with copper and aluminum conductors
- Range taking designs accommodate wire sizes up to 535 DLO and can support 1 or 2 run conductors and up to 12 taps for secondary circuits
- Allow for panel mounting, medium and large sizes also allow for DIN rail mounting
- Finger-Safe style are provided with translucent polycarbonate top covers and end plates permitting easy visual inspection, provide IEC 605219 IP-20 Rating
- Base and side barriers of glass-reinforced nylon 6/6 for extra durability and excellent insulating properties
- UL94 flammability rating of VO

Application

VERSI-POLE Power Distribution Blocks are designed to provide modular solutions to power distribution applications.

Specifications

Buy American Compliant	Contact Manufacturer
Certification - cULus	Yes
EU RoHS Indicator	Yes
Standards - RoHS Compliance Status	CM
Certification - CSA Approved	No
Buy America(n) Qualified	Contact Manufacturer
Conductor	
Conductor Type	AL C Str-Run;CU C Str-Run;AL C Str-Tap;CU C Str-Tap

Configuration

Connector Type Power Distribution Block

Current

Rating - Minimum Voltage 600

Dimensions

Dimension - Height mm 0 mm

General

Sub Brand	VERSIPOLE
Trade Name	VERSIPOLE™
Plated	Y
Insulation	Y
Type	BDB
UPC 12 Digit	781810676226
UPC 14 Digit GTIN	00781810676226
Material	Aluminum
Plating Type	Tin
UPC	781810676226

Logistics

Minimum Pack Quantity	1
Carton Quantity	4
Pallet Quantity	384

Operational

Temperature Rating 194

Product Assets

[Catalog \[English\]](#)