

Product data sheet

Specifications



Safety switch, double throw, non fusible, 3 pole, 3 wire, 240VAC, 250VDC, 400A, Type 3R

DTU325R

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Double Throw Safety Switch
Duty Rating	General duty
Disconnect Type	Non-fusible disconnect switch
Factory Installed Neutral	None
Number of Poles	3
Current Rating	400 A
Voltage Rating	240 V AC 250 V DC
Enclosure Rating	NEMA 3R
Motor power hp	125 hp at 240 V AC 50-60 Hz for 3 phase motors 50 hp at 250 V DC

Complementary

Short-circuit current	10 kA H or K 200 kA R, J or T
Fuse type	H or K R, J or T
Mounting Type	Surface
Wire Size	AWG 1/0...750 kcmil aluminium/copper
Depth	7.25 in (184.15 mm)
Width	24 in (609.6 mm)
Height	54.50 in (1384.30 mm)
Net Weight	141.10 lb(US) (64 kg)

Environment

Certifications	UL Listed
----------------	-----------

Ordering and shipping details

Category	US10DE100133
Discount Schedule	ODE1
GTIN	785901331445
Returnability	Yes
Country of origin	US

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	10.6 in (26.9 cm)
Package 1 Width	26.0 in (66.0 cm)
Package 1 Length	56.3 in (143.0 cm)
Package weight(Lbs)	170.0008 lb(US) (77.111 kg)

Contractual warranty

Warranty	18 months
----------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	1323
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACh Regulation	REACh Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
Halogen content performance	Halogen free plastic parts product
PVC free	Yes


Use Again

Repack and remanufacture

Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Technical Illustration


Dimensions

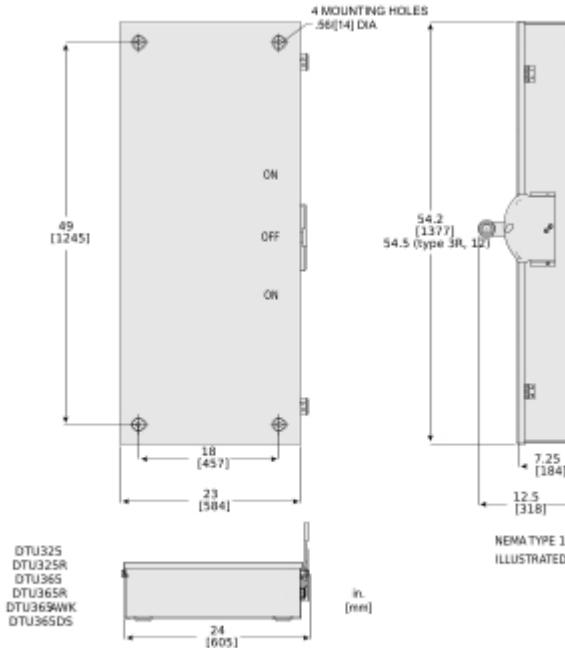

ALL DIMENSIONS ARE APPROXIMATE.
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

Technical Illustration

Wiring diagram

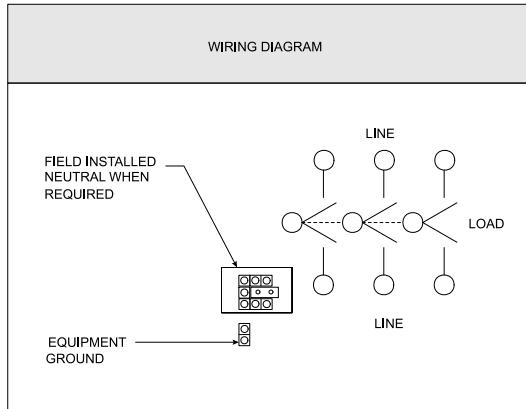

REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.