
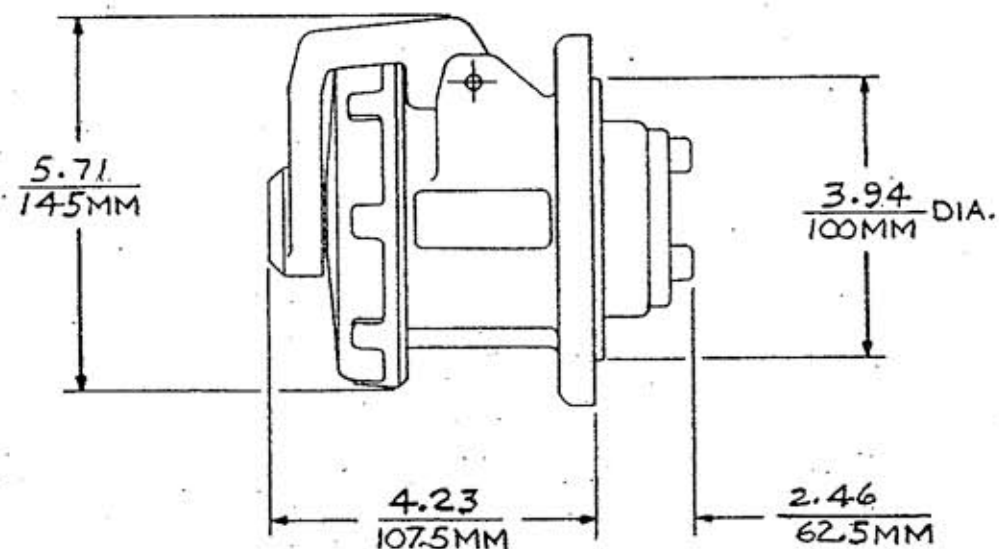


M-7670 1

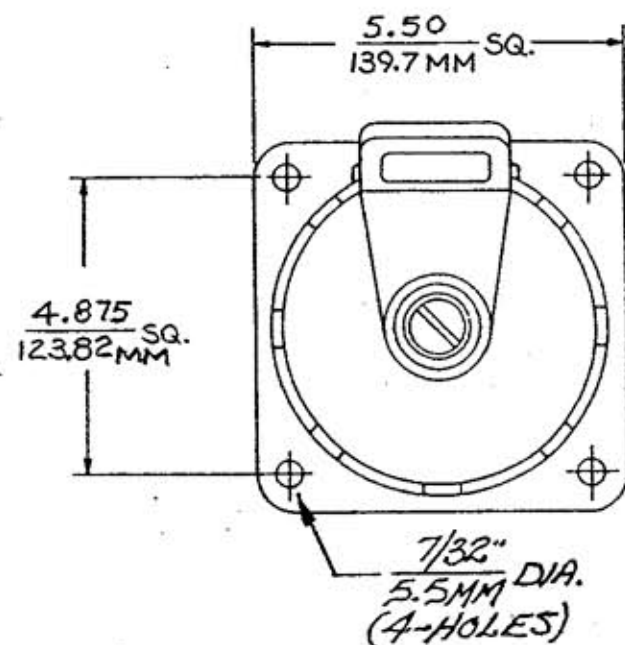

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	NYLON	
INTERIOR	THERMOSET	
GASKET	RUBBER	
SLEEVE INSERTS	BERR COPPER	SILVER
SLEEVES	BRASS	
TERMINAL SCREWS	STAIN. STL.	
DISC	POLYCARB.	
ASSY. SCREWS	STAIN. STL.	
COVER	POLYESTER	
COVER SCREWS	BRASS	NICKEL
COVER SPRING	STAIN. STL.	
ARM	POLYESTER	
HINGE PIN	STAIN. STL.	
HINGE SPRING	STAIN. STL.	

DIMENSION SHEET FOR CAT. NO.

REPAIRABLE ☐ NON-REPAIRABLE ☒

B

M-7670

1

CAT. No.	CONFIGURATION	RATING	CAT. No.	CONFIGURATION	RATING
			M4100R12		100 AMP 125/250 VAC

NOTES:

1. ALL DECIMAL DIM. TOLS. TO BE $\pm .03$

TITLE

100A 4 WIRE
PIN & SLEEVE
RECEPTACLE

TOLERANCES UNLESS
OTHERWISE SPECIFIED

FRACTIONS $\pm 1/64$
DECIMALS $\pm .001$
ANGLES $\pm 2^\circ$

WIRING DEVICE DIVISION
HARVEY HUBBELL, INC.
BRIDGEPORT, CONN.

DR. BY *RJB* APP. BY *RJB*
TR. BY *RJB* SCALE 1:1
CHK'D. BY *RJB* DATE 8-22-96

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE.

1 RELEASE PER DCN4455 RJA 8-22-96
SYM REVISIONS APP DATE