

Mogul Conduit Bodies with Cover and Gasket

LB Type with Rollers - Hot Dip Galvanized - Malleable Iron

Features

- c(UL)us wet locations
- Built in cable pulling roller
- Threaded NPT tapered hubs for Rigid and IMC conduit
- Smooth and round integral hub bushings protect conductor insulation
- Access to wiring for maintenance and future changes
- Assembled with raised cover, gasket and stainless steel cover screws

Applications

- Use to pull straight or 90° angle turns or making taps and splices
- Provides long and large openings for pulling large conductors, splicing and taps
- Serve as a pull outlets for conductors that are stiff

Standard Material



- Body - Malleable iron
- Gasket - Neoprene rubber
- Screws - Stainless steel

Standard Finish

- Hot dip galvanized

Applicable Third Party Standards

- UL Standard: UL 514A - UL 514D
- Fed. Spec: W-C-586D, A-A-50563
- NEMA: FB 1-2014 - NEMA 3R
- CSA Standard C22.2 No. 18.3; CSA certified

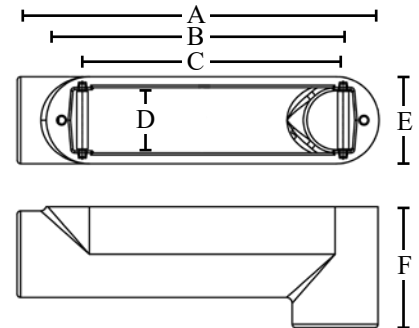

Catalog Number	UPC	Size	Max. Number	Max. Size	Internal Volume (in ³)	Ship Case	Weight/Case	Inches					
								A	B	C	D	E	F
MLB3CGHDG	00966	1"	3	4 AWG	19	1	4	8.62	5.98	---	1.71	2.19	2.81
MLB4CGHDG	00967	1-1/4"	3	2 AWG	25	1	5	8.62	5.98	---	1.71	2.19	3.25
MLB5CGHDG	00969	1-1/2"	3	1/0 AWG	57	1	9	12.72	10	9.17	2.26	3.03	3.63
MLB6CGHDG	00970	2"	3	4/0 MCM	75	1	13	12.72	10	9.17	2.26	3.03	4.23
MLB7CGHDG	00971	2-1/2"	3	300 MCM	163	1	22	16.93	15	10.86	3.41	4.27	5.22
MLB8CGHDG	00972	3"	3	350 MCM	211	1	38	16.93	15	10.86	3.41	4.27	6.02
MLB9CGHDG	00973	3-1/2"	3	500 MCM	375	1	48	22.20	19.96	15.08	4.28	5.31	6.71
MLB10CGHDG	00974	4"	3	500 MCM	439	1	59	22.20	19.96	15.08	4.28	5.31	7.19