



LED Glass HID lamps

19GC/LED/850/ND E26 BB 6/1

CorePro, LED, ED75, Mains only, 19 W, E26 | Single Contact Medium Screw, 5000 K, 3000 lm, 25000 hour(s)

Philips Glass HID lamps offer you an easy, short-payback LED solution to replace High Intensity Discharge (HID) lamps. Thanks to our High-Power LED filament technology, this new generation of indoor/outdoor glass lamps brings all the energy-efficiency and long-lifetime benefits of LED to HID replacement, while providing instant savings with a low initial investment. They are designed to have the same aesthetics, lamp size and light distribution as the HID lamps they are replacing, so the upgrade to LED is easier than ever!

Product data


General Information		LLMF At End Of Nominal Lifetime (Nom)	70 %
Cap-Base	E26 [Single Contact Medium Screw]		
Nominal lifetime	25,000 hour(s)		
Switching Cycle	15,000		
Lighting Technology	LED		
Warranty period	3 years		
Light Technical		Operating and Electrical	
Color Code	850 [CCT of 5000K]	Line Frequency	50 to 60 Hz
Beam Angle (Nom)	300 degree(s)	Input Frequency	50 to 60 Hz
Luminous Flux	3,000 lm	Power Consumption	19 W
Color Designation	Daylight	Lamp Current (Nom)	176 mA
Correlated Color Temperature (Nom)	5000 K	Starting Time (Nom)	0.5 s
Luminous Efficacy (rated) (Nom)	157.00 lm/W	Warm-up time to 60% light	0.5 s
Color Consistency	<6	Power Factor (Fraction)	0.9
Color rendering index (CRI)	80	Voltage (Nom)	120-277 V
		UL Type	HIB_UL Type B (UL Listed+Classified)
		Ballast Compatibility	Mains only

LED Glass HID lamps

Temperature	
T-Case Maximum (Nom)	54.8 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Glass
Bulb Shape	ED75
Net Weight (Piece)	0.136 kg
Approval and Application	
Energy Saving Product	Yes
Energy Consumption kWh/1000 h	19 kWh
EU RoHS compliant	Yes



Ambient temperature range	-20 °C to 45 °C
Application Conditions	
can it be used in closed luminaires	Yes
Product Data	
Order product name	19GC/LED/850/ND E26 BB 6/1
Full product name	19GC/LED/850/ND E26 BB 6/1
Order code	929003507904
Material Nr. (12NC)	929003507904
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677578862
Numerator - Packs per outer box	6
EAN/UPC - Case	50046677578867

Dimensional drawing



Product	D	C
19GC/LED/850/ND E26 BB 6/1	76 mm	183 mm

Photometric data




General uniform lighting - 19GC/LED/850/ND E26 BB 6/1

Light Distribution Diagram - 19GC/LED/850/ND E26 BB 6/1


LED Glass HID lamps

Photometric data

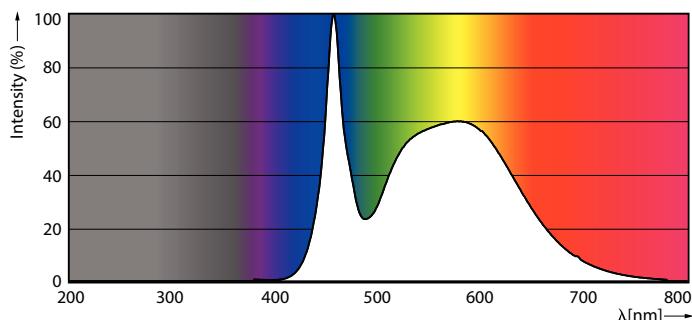


Spectral Power Distribution Colour - 19GC/LED/850/ND E26 BB 6/1

Lifetime

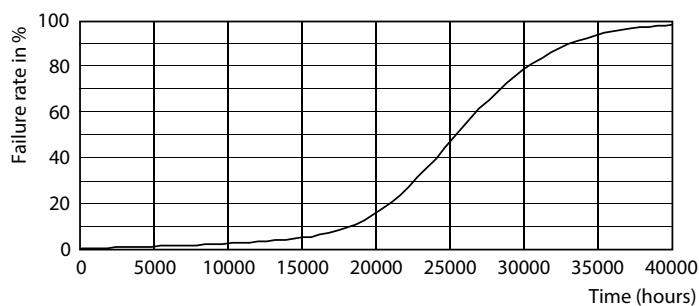

Life Expectancy Diagram

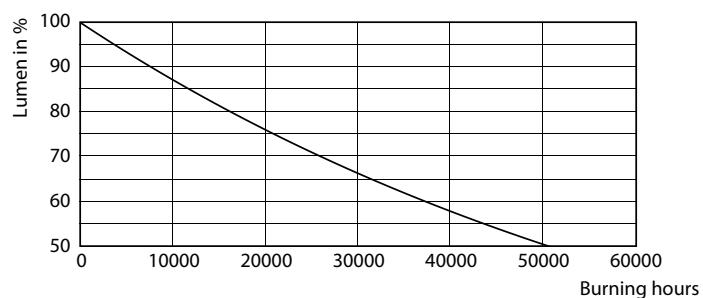

Lumen Maintenance Diagram - 19GC/LED/850/ND E26 BB 6/1

