

Product data sheet

Specifications



Empty control station, Harmony XALD, XALK, plastic, yellow, 1 cut out, unmarked, UL CSA certified

XALK01H7

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony XALK
Product or Component Type	Empty control station
Device short name	XALK
Product destination	For XB5 Ø 22 mm control and signalling units
Control station application	Emergency switching off function Emergency stop function
Number of cut-out	1 cut-out
Colour of base of enclosure	Light grey RAL 7035)
Colour of cover	Yellow RAL 1021)
Material	Polycarbonate
Cable entry	1 knock-out for cable entry 0.6 in (14 mm) 2 knock-outs for Pg 13 cable gland and ISO M20 0.5 in (12 mm)
IP degree of protection	IP66 IEC 60529 IP67 IP69 IP69K

Complementary

Assembly style	For customer assembly
Number of horizontal rows	1
Number of vertical rows	1
Resistance to high pressure washer	1015.3 psi (7000000 Pa) 131 °F (55 °C) 0.1 m
Mounting of block	Front mounting Rear mounting
electrical composition code	SF1 SR1 MF1 MR1
Main group	1 cut-out
Group of product	UL-CSA yellow

Environment

Protective treatment	TH
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature for Operation	-40...158 °F (-40...70 °C)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Overvoltage category	Class II conforming to IEC 60536
NEMA degree of protection	NEMA 13 NEMA 4X
IK degree of protection	IK03 conforming to IEC 62262
Standards	IEC 60947-5-4 CSA C22.2 No 14 JIS C8201-5-1 IEC 60947-5-1 IEC 60947-1 IEC 60947-5-5 UL 508 JIS C8201-1
Product Certifications	UL CSA

Ordering and shipping details

Category	US10CS222475
Discount Schedule	0CS2
GTIN	3389110115871
Returnability	Yes
Country of origin	CZ

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.4 in (6.0 cm)
Package 1 Width	2.8 in (7.0 cm)
Package 1 Length	3.1 in (8.0 cm)
Package weight(Lbs)	4.3 oz (121.0 g)
Unit Type of Package 2	S03
Number of Units in Package 2	50
Package 2 Height	11.8 in (30.0 cm)
Package 2 Width	11.8 in (30.0 cm)
Package 2 Length	15.7 in (40.0 cm)
Package 2 Weight	14.414 lb(US) (6.538 kg)

Contractual warranty

Warranty	18 months
----------	-----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) **1**

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard **Yes**

Packaging without single use plastic **Yes**

[EU RoHS Directive](#) **Pro-active compliance (Product out of EU RoHS legal scope)**

REACH Regulation [REACH Declaration](#)

Use Again


Repack and remanufacture

Circularity Profile [End of Life Information](#)

Take-back **No**

Dimensions Drawings

Dimensions

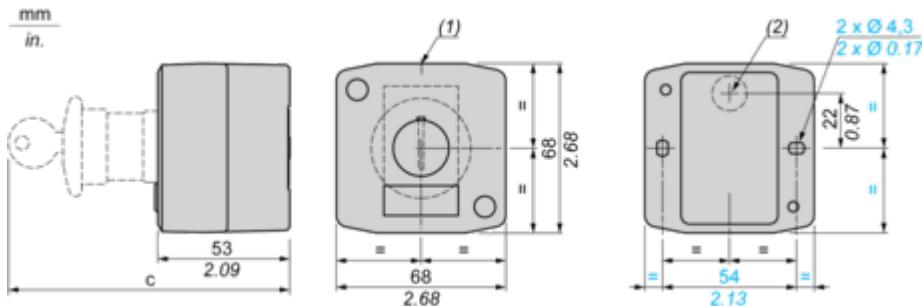


(1) 2 knock-outs for Pg 13.5 cable gland, maximum capacity 12 mm/0.47 in.

(2) Knock-out for cable entry, maximum capacity 14 mm/0.55 in.

Control station fitted with:	c in mm	c in in.
Flush pushbutton	62	2.44
Pilot light	64	2.52
Illuminated pushbutton	65.5	2.58
Projecting pushbutton	66	2.60
Selector switch	80	3.15
Mushroom head pushbutton	91.5	3.58
Latching mushroom head Emergency stop pushbutton with key	115	4.53
Key switch	105.5	4.15

Technical Illustration

Dimensions

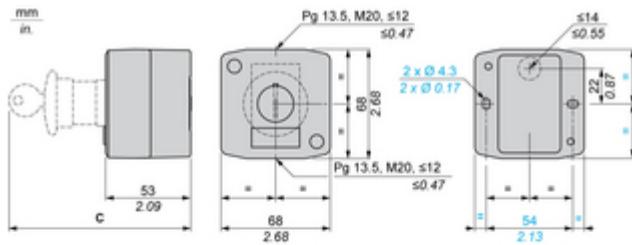


C	mm	in.
ZB5AA•, ZB5AH0•	62	2.44
ZB5AV•	64	2.52
ZB5AW3•	65.5	2.58
ZB5AL•, ZB5AW1•, ZB5AH•, ZB5AH3•	66	2.6
ZB5AD•, ZB5AK•	80	3.15
ZB5AS8•, ZB5AT•, ZB5AC•, ZB5AR•, ZB5AW4•, ZB5AW6•, ZB5AS4•, ZB5AS5•, ZB5AS6•	91.5	3.58
ZB5AS9•, ZB5AS1•, ZB5AS7•	115	4.53
ZB5AG•	105.5	4.15

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XALK

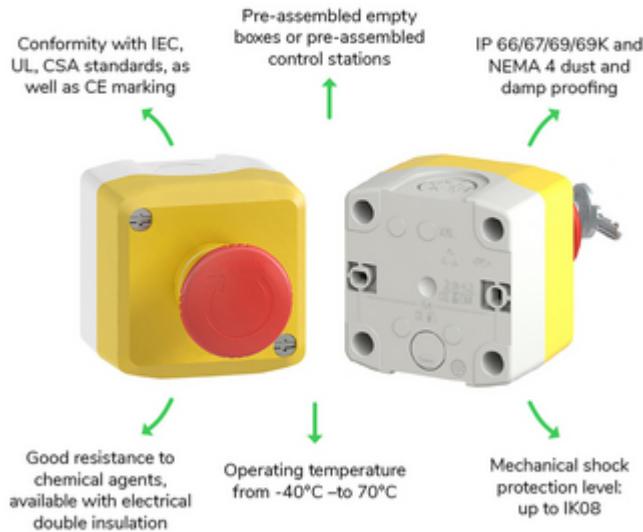

Offer Marketing Illustration

Product benefits / Features

Features

Harmony XALK



- Complete stations for emergency stop function with a single mushroom head non-illuminated or illuminated function from XB5 range**
- Possibility to add up to 3 NO or NC contact blocks per operating head**
- Complete, ready-to-install stations with 1 to 3 buttons for the most common functions**
- Polycarbonate pre-drilled control stations**
- Modular system and simple to cable universal range**

Image of product / Alternate images

Alternative

