



PASS & SEYMOUR®
Hospital Grade Devices
Extra Heavy-Duty Receptacles
15 & 20A, 125V; 20A, 250V




Ready for the harshest medical facility environments.

8200, 8300, 8800, 8200IL, 8300IL

When it comes to toughness, this no-compromise receptacle has it all: impact-resistant nylon face and body, heavy-gauge brass strap locked into both the body and face, and one-piece, triple-wipe, nickel-plated brass contacts. It also features screw-pressure-plate back wiring on all terminals (including the ground) for the fastest installation. Circuit label on the face and LED lamps on illuminated face models add value.

Features & Benefits

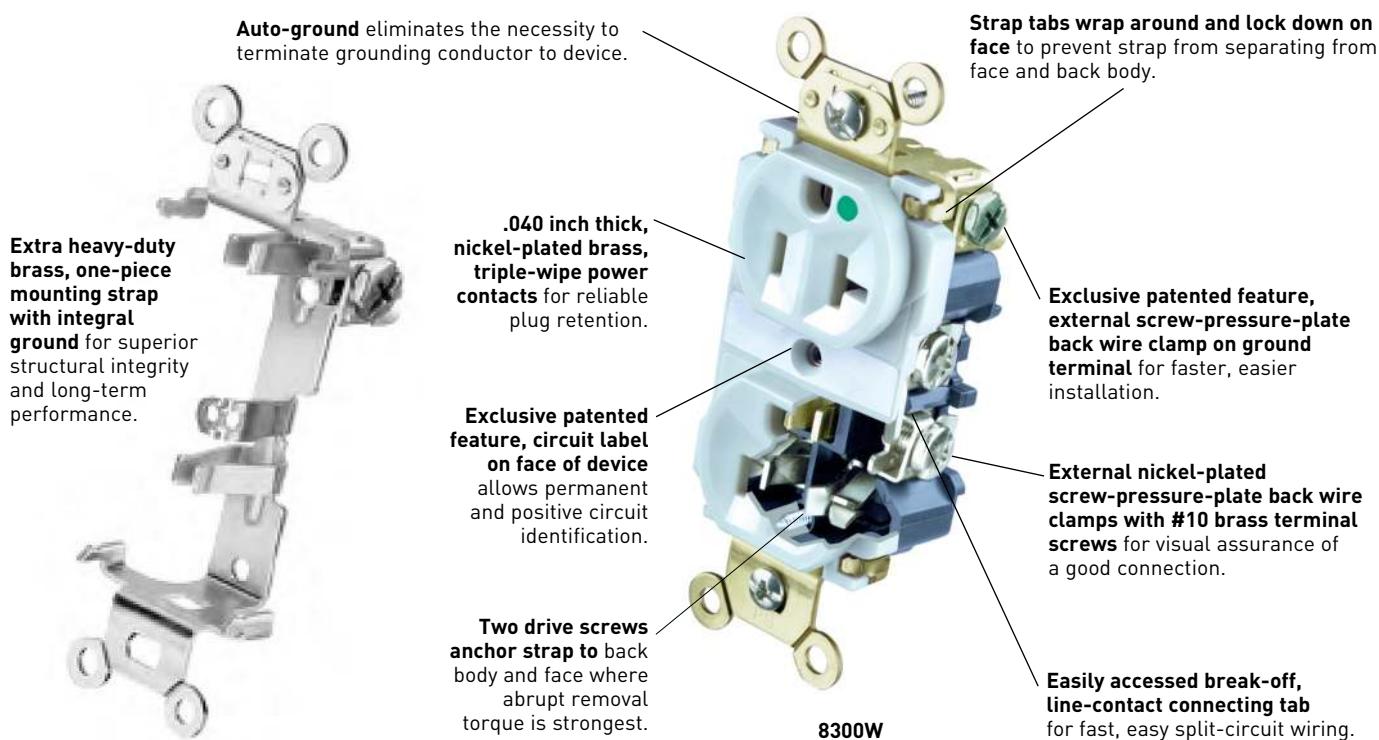

3rd Party Compliance



UL Listed, File Number E140596, Standard UL498.

Federal Specification WC596, Hospital Grade.

CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42.

Technical Specification

Performance


Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical	
Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 AWG – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of device

Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

Materials	
Face	Nylon
Body	Nylon
Line Contacts	.040 688 Nickel-Plated Brass
Mounting Strap	.050 688 Brass
Ground Contacts	Strap with Integral Ground
Pressure Plate	.031 260 Nickel-Plated Brass
Terminal Screws	#10 Tri-Drive Brass (Neutral = Nickel-Plated Steel)
Ground Screw	#10 Hex Tri-Drive Brass
Assembly Drive Screw	Zinc-Plated Steel
Auto-Ground Clip	Brass
Mounting Screws	Tri-Drive Steel
Illuminating Lamp*	LED

*For LED Illuminated Face Receptacles

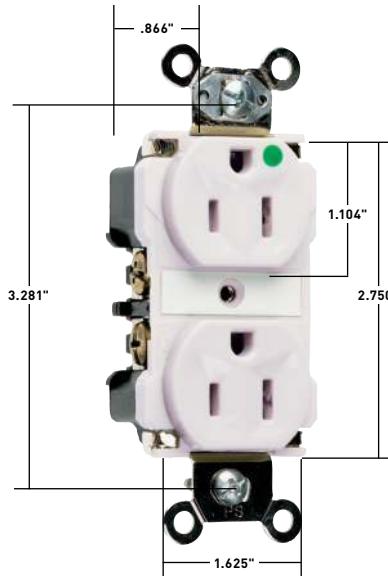


Dimensions for
15 & 20 Amp

Warranty


1 Year

Ordering Information

Catalog Number	Rating A	Rating V	Color	NEMA Configuration No.
Hospital Grade Duplex Receptacles Back & Side Wire				
8200I	15A	125V	Ivory	5-15R
8200W	15A	125V	White	5-15R
8200	15A	125V	Brown	5-15R
8200GRY	15A	125V	Gray	5-15R
8200BK	15A	125V	Black	5-15R
8200RED	15A	125V	Red	5-15R
8200LA	15A	125V	Light Almond	5-15R
8300I	20A	125V	Ivory	5-20R
8300W	20A	125V	White	5-20R
8300	20A	125V	Brown	5-20R
8300GRY	20A	125V	Gray	5-20R
8300BK	20A	125V	Black	5-20R
8300RED	20A	125V	Red	5-20R
8300LA	20A	125V	Light Almond	5-20R
8800I	20A	250V	Ivory	6-20R
8800W	20A	250V	White	6-20R
8800	20A	250V	Brown	6-20R
8800GRY	20A	250V	Gray	6-20R
8800BK	20A	250V	Black	6-20R
8800RED	20A	250V	Red	6-20R
8800LA	20A	250V	Light Almond	6-20R
Hospital Grade LED Illuminated Face Duplex Receptacles Back & Side Wire				
8200ILI	15A	125V	Ivory	5-15R
8200ILRED	15A	125V	Red	5-15R
8200ILW	15A	125V	White	5-15R
8300ILI	20A	125V	Ivory	5-20R
8300ILRED	20A	125V	Red	5-20R
8300ILLA	20A	125V	Light Almond	5-20R
8300ILW	20A	125V	White	5-20R
8300ILGRY	20A	125V	Gray	5-20R



NEMA
5-15R



NEMA
5-20R



NEMA
6-20R

Vertical Markets

- Health Care
- Education
- Institutional

Also available

• PlugTail® Wiring Devices	• Ground Continuity Monitoring (GCM)	• Turnlok® Locking Devices	• IEC 309 Industrial Products
• USB Charging Receptacles	• Straight Blade Plugs & Connectors	• Weatherproof Boxes & Covers	• Flexcor® Wire Mesh Grips
• SPD & Isolated Ground Devices			• Hospital Grade Devices

 The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications. Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.