

## Straight Blade Devices

20 Amp, 125 Volt, 2-Pole, 3-Wire

## SNAPConnect® Hospital Grade Receptacle

# HUBBELL

### Features

- Audible SNAP, indicates solid connection
- Reduces installation time
- Tamper Resistant, Single Receptacle

### Ordering Information

Description  
Hospital Grade,  
Tamper-Resistant

Device Color UPC Number  
Ivory 783585557649

Catalog Number  
SNAP8310ITR




### Listings

UL Listed to UL498 File No. E2568  
Certified to CSA, C22.2, No. 42 File 667  
Fed. Spec. W-C-978  
NEMA® WD-6 Compliant

### Specifications

Face	Nylon
Base	Nylon
Line Contact	Brass
Ground Contact	Brass

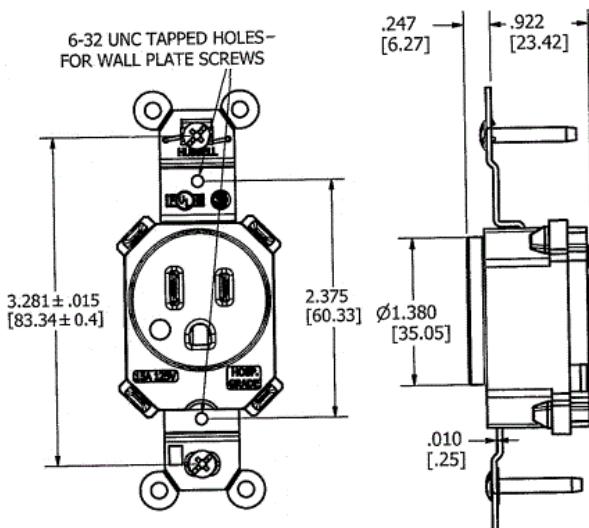

### Performance

#### Electrical

Current Interrupting Certified for current interrupting at full rated current  
Dielectric Voltage Withstands 2,000V minimum

#### Mechanical

Product Identification Ratings are a permanent part of the device

#### Environmental

Flammability UL 94V-2  
Operating Temperature Maximum continuous 75°C; minimum -40°C (without impact)

### Complementary Products

Wallplate or Weatherproof Cover  
Opening

### Online Resources

Customer Sales Drawing  
eCatalog  
Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

