



UPC: 192552000260

Color: Clear

Weight: 0.1 lbs

Project:

Type:

Prepared By:

Date:

Technical Specifications

Performance

Product Type:  
Decorative

Input Wattage:  
5W

Lumens:  
500lm

L70 Lifespan:  
15,000-Hour LED lifespan based on IES LM-70 results

Wattage Equivalency:  
60W

LED Characteristics  
Color Accuracy (CRI):  
90 CRI

Color Temperature:  
4000K

Beam Angle:  
360°

Electrical

Power Factor:  
>0.7

Dimmable:  
Yes, down to 10%

Input Voltage:  
120V

Operating Frequency:  
60 Hz

Operating Temperature:  
-20°C to 40°C

Construction

Shape:  
B11

Enclosure Material:  
Glass

Housing Finish:  
Clear

Installation

Base Type:  
E12

Other

Technology EQ:  
Incandescent

3-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Compliance

Listings:  
UL Listed

Environment:  
Wet / Enclosed

T20 Compliant:  
Yes, Title 20 Tier 2

RoHS:  
Mercury and UV free. RoHS-compliant components.

FCC:  
Complies with Part 15B of the FCC Rules


Minimum Compartment Size

| Length x Width x Height [in] | Lamp Quantity |
|------------------------------|---------------|
| 6                            | 1             |

Case and Pallet Dimensions

|        | QTY  | LENGTH (in) | WIDTH (in) | HEIGHT (in) |
|--------|------|-------------|------------|-------------|
| CASE   | 0    | 0           | 0          | 0           |
| PALLET | 3180 | 0           | 0          | 0           |

Dimension

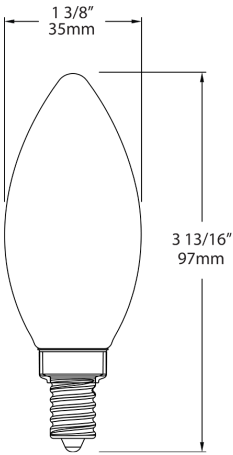

Features

- Replacement for conventional decorative lamps
- Filament LED construction gives a unique traditional look and feel for decorative and ambient applications
- Produces rich and vibrant colors, >90CRI
- Rated for use in enclosed and open fixtures in dry and damp locations
- Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs
- Title 20 Compliant, ENERGY STAR Compliant, UL Listed
- Smooth uniform dimming down to 10% (check dimmer compatibility list)

Ordering Matrix

| Family | Wattage          | Base Type              | CRI/Color Temp                                                    | Type         | Finish                   |
|--------|------------------|------------------------|-------------------------------------------------------------------|--------------|--------------------------|
| B11    | 5                | E12                    | 940                                                               | F            | C                        |
|        | 3 = 3W<br>5 = 5W | E12 = E12<br>E26 = E26 | 940 = 90 CRI, 4000K<br>930 = 90 CRI, 3000K<br>927 = 90 CRI, 2700K | F = Filament | C = Clear<br>F = Frosted |