


Gas Station/Recessed Canopy



CANOPY LIGHTING



71400A

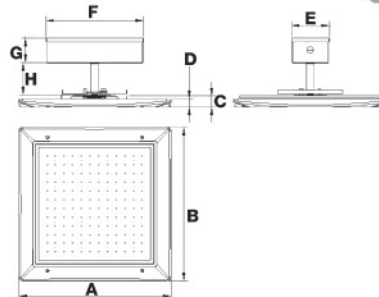


71413

- Lumileds 3030 LEDs
- Corrosion Resistant Die Cast Aluminum Housing
- Polycarbonate Lens
- Superior Architectural White Powder Coat Finish
- Stainless Steel Hardware
- Operation Temp: -40°F to 131°F
- Photo Control (not included) Installed Remotely
- Input Voltage: 120/208/240/277VAC

- Color Temp: 5000K Cool White
- CRI: 84
- Light Pattern: 120° Beam Angle
- Weight: 25 lbs
- IP65 (NEMA 4X) Dust & Water Tight
- cULus Listed for Wet Locations
- 50,000+ Hour Life Expectancy
- 5 Year Warranty

Cat. No.	Watts	Mounting	Delivered Lumens	Replaces Metal Halide	Dimensions								Case Qty
					A	B	C	D	E	F	G	H	
71400A	115	Recessed	16,000	400W	19"	19"	1-3/8"	1"	4-3/4"	12-1/4"	3-1/4"	4"	1
71413	150	Recessed	20,483	600W	20-1/2"	20-1/2"	1-1/4"	1"	4-3/4"	12-1/4"	3-1/4"	4"	1

Gas Station Surface Mount Canopy

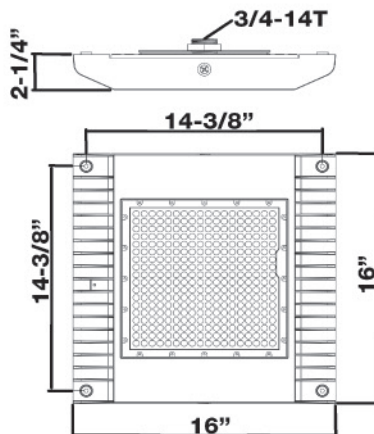

- Lumileds 3030 LEDs
- Corrosion Resistant Die Cast Aluminum Housing
- Polycarbonate Lens
- Superior Architectural White Powder Coat Finish
- Stainless Steel Hardware
- Operation Temp: -40°F to 131°F
- Input Voltage: 120/208/240/277VAC
- Color Temp: 5000K Cool White
- CRI: 73
- Light Pattern: 115° Beam Angle
- Weight: 25 lbs
- IP65 (NEMA 4X) Dust & Water Tight
- cULus Listed for Wet Locations
- 50,000+ Hour Life Expectancy
- 5 Year Warranty

Cat. No.	Watts	Mounting	Delivered Lumens	Replaces Metal Halide	Case Qty
71411	120	Surface	16,771	400W	1
71412	150	Surface	22,345	600W	1