

Product Environmental Profile

Wiremold® Unequipped Tele-Power® Poles



LEGRAND'S ENVIRONMENTAL COMMITMENTS

- **Incorporate environmental management into our industrial sites**

Of all Legrand sites worldwide, over 85% are ISO 14001-certified (sites belonging to the Group for more than five years).

- **Offer our customers environmentally friendly solutions**

Develop innovative solutions to help our customers design more energy efficient, better managed and more environmentally friendly installations.

- **Involve the environment in product design and provide informations in compliance with ISO 14025**

Reduce the environmental impact of products over their whole life cycle.

Provide our customers with all relevant information (composition, consumption, end of life, etc.).



REFERENCE PRODUCT

Function	Connect a workstation remote from the wall to the energy and communication networks for 20 years, via 2x2 power sockets.
Reference Product	
	Cat. No. 25DTC-4
	Two-compartment pole



The company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in the document are for guidance and cannot be held binding on the company.

PRODUCTS CONCERNED

The environmental data is representative of the following products (see extrapolation rule at the end of the document):

- **25DTC series:** 25DTC-4, 25DTC-412, 25DTC-415, 25DTC-4-DG, 25DTC-412-DG, 25DTC-415-DG
- **AMTC series:** AMTC-4, AMTC-412, AMTC-415,

Product Environmental Profile

Wiremold® Unequipped Tele-Power® Poles

PEP
ECO
PASS
PORT®

CONSTITUENT MATERIALS

This Reference Product contains no substances prohibited by the regulations applicable at the time of its introduction to the market. It respects the restrictions on use of hazardous substances as defined in the RoHS directive 2011/65/CE.

Total weight of Reference Product	344.62oz (9770.0g) (with unit packaging)		
Plastics as % of weight	Metals as % of weight		Other as % of weight
Other plastics	0.7 %	Steel	54.9 %
PVC	0.4 %	Aluminium	11.1 %
PA	< 0.1 %		Packaging as % of weight
			Paper 21.9 %
			Wood 10.2 %
			PE 0.7 %
Total plastics	1.1 %	Total metals	66.1 %
			Total other and packaging 32.8 %

Estimated recycled material content: 40 % by mass.

For Aluminium Tele-Power Poles (AMTC series), use the table below regarding the constituent materials.

Total weight of Reference Product	229.51oz (6506.6g) (with unit packaging)		
Plastics as % of weight	Metals as % of weight		Other as % of weight
Other plastics	1.1 %	Aluminium	46.1 %
PVC	0.7 %	Steel	2.9 %
PA	< 0.1 %		Packaging as % of weight
			Paper 32.9 %
			Wood 15.2 %
			PE 1.0 %
Total plastics	1.8 %	Total metals	49.0 %
			Total other and packaging 49.1 %

Estimated recycled material content: 34 % by mass.



MANUFACTURE

This Reference Product comes from sites that have received ISO14001 certification.



DISTRIBUTION

Products are distributed from logistics centers located to optimize transport efficiency using EPA SmartWay® certified carriers to reduce greenhouse gases emissions. The Reference Product is therefore transported by truck from our warehouse to the local point of distribution into the market in North America, over a maximum range distance of 2175 miles [3500km].

Product Environmental Profile

Wiremold® Unequipped Tele-Power® Poles

PEP
ECO
PASS
PORT®

■ INSTALLATION ■

For the installation of the product, only standard tools are needed.



■ USE ■

Servicing and maintenance :

Under normal conditions of use, this product requires no servicing or maintenance.

**Consumables :**

No consumables are necessary to use the Reference Product.

■ END OF LIFE ■

Development teams integrate product end-of-life factors in the design phase.

Hazardous waste* contained in the product: no hazardous waste

(*) Hazardous waste as defined by European Commission decision 2000/532/EC.

• Recycling rate:

Calculated using the method described in the IEC/TR 62635 technical report, the recyclability rate of the product is estimated as 94.9 %. This value is based on data collected from a technological channel using industrial procedures. It does not pre-validate the effective use of this channel for end-of-life electrical and electronic products.

Separated into:

- metal materials (excluding packaging)	: 66.7 %
- plastic materials (excluding packaging)	: 1.2 %
- packaging (all types of materials)	: 32.0 %



■ ENVIRONMENTAL IMPACTS ■

The evaluation of environmental impacts examines the stages of the Reference Product life cycle: manufacturing, distribution, installation, use and end-of-life. It is representative from products marketed and used in North America.

For each phase, the following modelling elements were taken in account:

Manufacture	Packaging taken into account. As required by the «PEP ecopassport» programme all transports for the manufacturing of the Reference Product, including materials and components, has been taken in account. The waste generated during manufacturing phase has been taken into account.
Distribution	Transport between the last Group distribution centre and an average delivery to the sales area. 2175 miles [3500km] as defined by the PCR version: PEP-PCR-ed 3-EN-2015 04 02.
Installation	The end-of-life of the packaging is taken into account at this phase
Use	<ul style="list-style-type: none">Under normal conditions of use, this type of product requires no servicing or maintenance.No consumables are necessary to use this type of product.Product category: PSR0003-ed1.1-EN-2015_10_16-Cable_Management_Solutions §3.2.3.1. Non-equipped service poles, service posts and multi-outlet extensions.Use scenario : no energy consumption during the 20 year working life. This modelling duration does not constitute a minimum durability requirement.Energy model: Electricity Mix; United States - 2009.
End of life	The default end of life scenario maximizing the environmental impacts
Software and database used	EIME V5 and its database «CODDE-2015-04» and the indicators defined in the PCR ed3 in alignment with the EN 15804 standard.

Product Environmental Profile

Wiremold® Unequipped Tele-Power® Poles



PEP
ECO
PASS
PORT®


■ SELECTION OF ENVIRONMENTAL IMPACTS



	Total for Life cycle		Raw material and manufacture		Distribution		Installation		Use		End of life	
Global warming	3.84E+01	kgCO2 eq.	3.61E+01	94%	1.70E+00	4%	1.82E-01	< 1%	0.00E+00	0%	4.37E-01	1%
Ozone depletion	6.14E-06	kgCFC-11 eq.	6.13E-06	100%	3.45E-09	< 1%	1.01E-09	< 1%	0.00E+00	0%	3.21E-09	< 1%
Acidification of soils and water	1.57E-01	kgSO2 eq.	1.47E-01	93%	7.65E-03	5%	8.74E-04	< 1%	0.00E+00	0%	1.84E-03	1%
Water eutrophication	2.95E-02	kg(PO4)3- eq.	2.40E-02	81%	1.76E-03	6%	7.54E-04	3%	0.00E+00	0%	3.03E-03	10%
Photochemical ozone formation	1.30E-02	kgC2H4 eq.	1.22E-02	94%	5.43E-04	4%	6.17E-05	< 1%	0.00E+00	0%	1.38E-04	1%
Depletion of abiotic resources - elements	2.00E-04	kgSb eq.	2.00E-04	100%	6.81E-08	< 1%	7.75E-09	< 1%	0.00E+00	0%	1.88E-08	< 1%
Total use of primary energy	1.63E+03	MJ	1.60E+03	98%	2.28E+01	1%	2.41E+00	< 1%	0.00E+00	0%	5.19E+00	< 1%
Net use of fresh water	2.59E-01	m ³	2.59E-01	100%	1.52E-04	< 1%	4.59E-05	< 1%	0.00E+00	0%	1.25E-04	< 1%
Depletion of abiotic resources - fossil fuels	4.44E+02	MJ	4.11E+02	93%	2.39E+01	5%	2.54E+00	< 1%	0.00E+00	0%	5.76E+00	1%
Water pollution	1.95E+03	m ³	1.58E+03	81%	2.80E+02	14%	2.87E+01	1%	0.00E+00	0%	6.17E+01	3%
Air pollution	4.77E+03	m ³	4.66E+03	98%	6.98E+01	1%	1.88E+01	< 1%	0.00E+00	0%	2.60E+01	< 1%

The values of the 27 impacts defined in the PCR-ed3-EN-2015 04 02 are available in the digital database of pep-ecopassport.org website.

% ENVIRONMENTAL IMPACT PER LIFE CYCLE STAGE OF REFERENCE PRODUCT

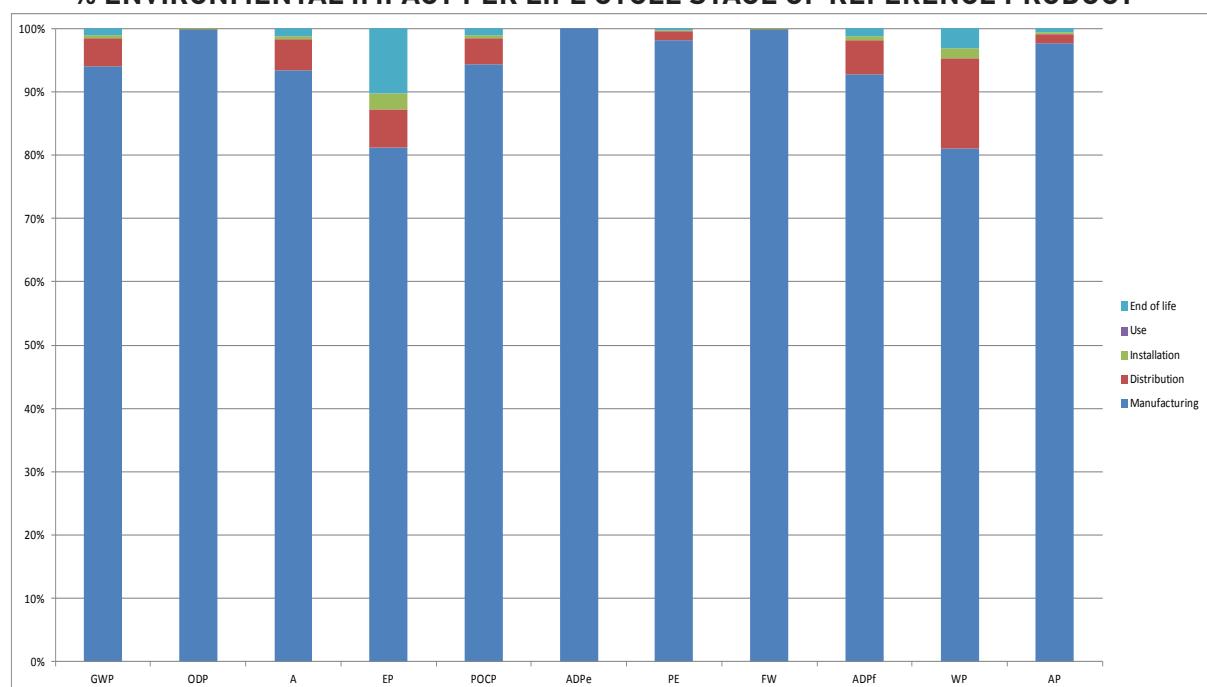

Product Environmental Profile**Wiremold® Unequipped Tele-Power® Poles****PEP
ECO
PASS
PORT®**

All the covers and bases are both side painted metals (ivory on one side, grey on the other one). As a consequence for all the colors, the environmental impacts are the same.
The two tables below can be combined.

	Manufacturing	Distribution	Installation	Use	End of life
25DTC series (REF)	1.0	1.0	1.0	1.0	1.0
AMTC series	1.3	0.7	1.0	1.0	0.6

The environmental impacts shown on the table above are based on the default length 10'5" of the reference product. To extrapolate different lengths, multiply all the impacts by the scale factor corresponding to the desired length shown in the table below.
412 series: 12'5", 415 series: 15'5"

Products Series	412 series	415 series
Ratio	1.2	1.5

Registration N°: LGRP-00629-V01.01-EN	Drafting rules: PEP-PCR-ed3-EN-2015 04 02 Supplemented by PSR0003-ed1.1-EN-2015_10_16
Verifier accreditation N°: VH02	Information and reference documents : www.pep-ecopassport.org
Date of issue: 12-2017	Validity period: 5 years
Independent verification of the declaration and data, in compliance with ISO 14025:2010	
Internal <input checked="" type="checkbox"/> External <input type="checkbox"/>	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)	
PEP are compliant with XP C08-100-1: 2014	
The elements of the present PEP cannot be compared with elements from another program	
Document in compliance with ISO 14025 : 2010: «Environmental labels and declarations. Type III environmental declarations»	
Environmental data in alignment with EN 15804 : 2012 + A1 : 2013	

