

# Product data sheet

Specifications



## Auxiliary contact block, TeSys Deca, 1NO+1NC, front mounting, for GV2

GVAE11

### Main

Range	TeSys TeSys Deca
Device short name	GVAE
Product or component type	Auxiliary contact block
Product compatibility	GV2P GV2RT GV2ME GV3L GV2LE GV3P GV2L
Mounting location	Front side
Pole contact composition	1 NO + 1 NC
Quantity per set	Set of 10

### Complementary

[Ui] rated insulation voltage	300 V conforming to UL 508 300 V conforming to CSA C22.2 No 14 250 V conforming to IEC 60947-1
[Ue] rated operational voltage	24...240 V AC 24...60 V DC
[ith] conventional free air thermal current	2.5 A
Mechanical durability	100000 cycles
Minimum switching current	5 mA
Minimum switching voltage	17 V
Protection type	GG fuse 10 A GB2CB06 circuit breaker 10 A
Rated operational power in VA	120 VA at 110...120 V AC-15 - electrical durability: 100000 cycles 120 VA at 230...240 V AC-15 - electrical durability: 100000 cycles 48 VA at 24 V AC-15 - electrical durability: 100000 cycles 60 VA at 48 V AC-15 - electrical durability: 100000 cycles
Rated operational power in W	15 W at 48 V DC-13 - electrical durability: 100000 cycles 24 W at 24 V DC-13 - electrical durability: 100000 cycles 9 W at 60 V DC-13 - electrical durability: 100000 cycles
Tightening torque	1.4 N.m - on screw clamp terminals
Height	11 mm
Width	45 mm
Depth	29 mm
Net weight	0.02 kg

## Environment

---

Environmental characteristic Normal environment

---

Product certifications UKCA

---

## Packing Units

---

Unit Type of Package 1 PCE

---

Number of Units in Package 1 1

---

Package 1 Height 1.200 cm

---

Package 1 Width 6.000 cm

---

Package 1 Length 7.000 cm

---

Package 1 Weight 17.000 g

---

Unit Type of Package 2 BB1

---

Number of Units in Package 2 10

---

Package 2 Height 6.200 cm

---

Package 2 Width 12.000 cm

---

Package 2 Length 7.400 cm

---

Package 2 Weight 174.000 g

---

Unit Type of Package 3 S02

---

Number of Units in Package 3 220

---

Package 3 Height 15.000 cm

---

Package 3 Width 30.000 cm

---

Package 3 Length 40.000 cm

---

Package 3 Weight 4.123 kg

---

## Contractual warranty

---

Warranty 18 months

---



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Environmental footprint

Total lifecycle Carbon footprint

1

## Use Better

### Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

Yes

[EU RoHS Directive](#)

Compliant

REACH Regulation

[REACH Declaration](#)

California proposition 65

**WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](#)

## Use Again

### Repack and remanufacture

End of life manual availability

[End of Life Information](#)

Take-back

No

WEEE Label

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Connections and Schema

---

GVAE11





Image of product / Alternate images

Alternative

---



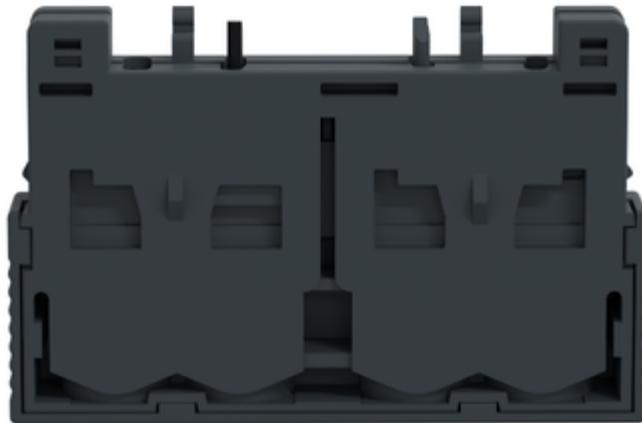

## Technical Illustration

### Assembly's dimensions

---

mm  
[in]

