
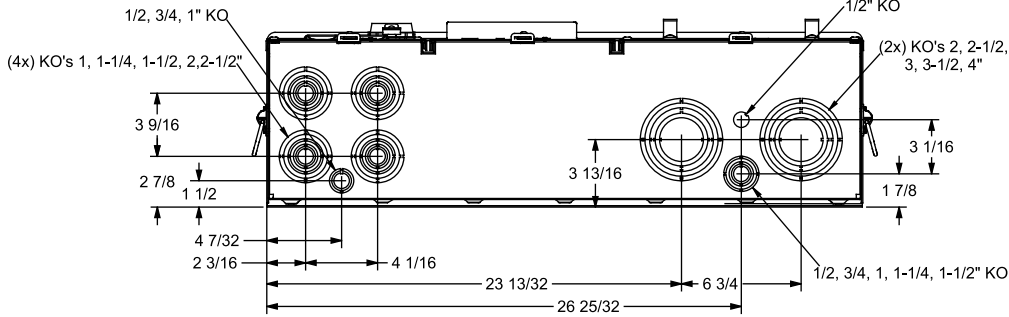
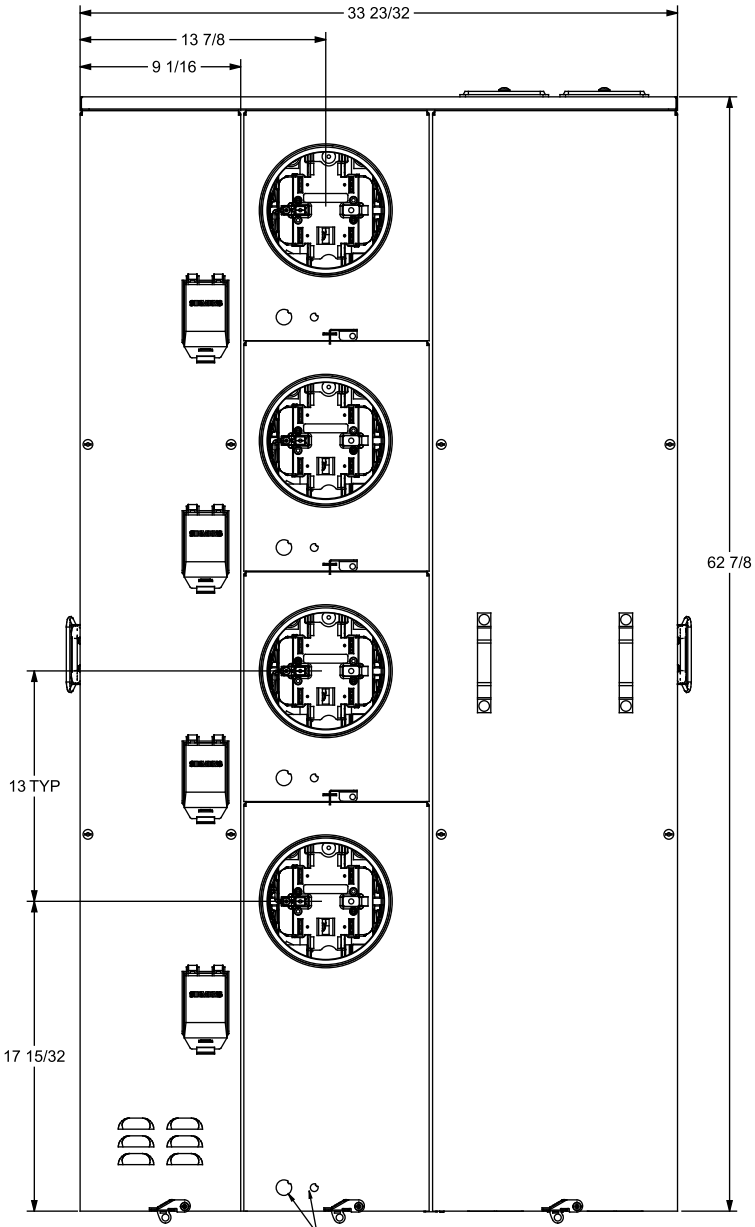
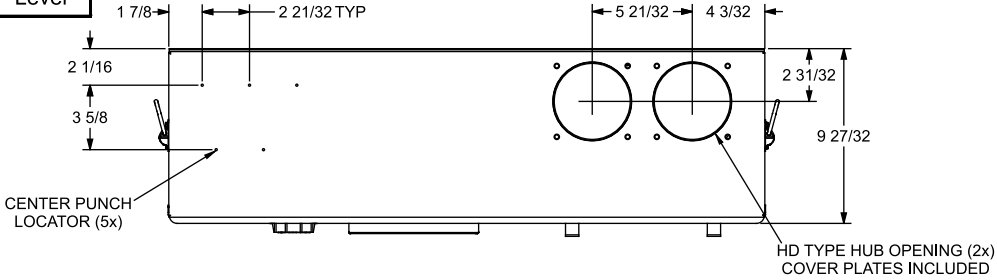


Catalog Numbers, Features and Ratings

Catalog Number	Max. Bus Rating	Max. Meter Socket Rating	AIC Rating Max.	Max. Branch Rating	Meter Positions	Meter Socket Cover	5th Jaw Installed	Bypass Type
WPL4412RJ	400A	200A Cont.	100,000	225A*	4	Ringless	Yes	Lever

- 120/240 V~, 1 PHASE, 3 WIRE
208Y/120 V~, 1 PHASE, 3 WIRE
- SUITABLE ONLY FOR USE AS SERVICE EQUIPMENT.
- TYPE N3R OUTDOOR ENCLOSURE
MATERIAL/FINISH: ANSI 61 GRAY BAKED POWDER COAT PAINT
OVER G-90 GLAVANIZED, PHOSPHATIZED STEEL

VIEW SHOWN WITH COVERS REMOVED

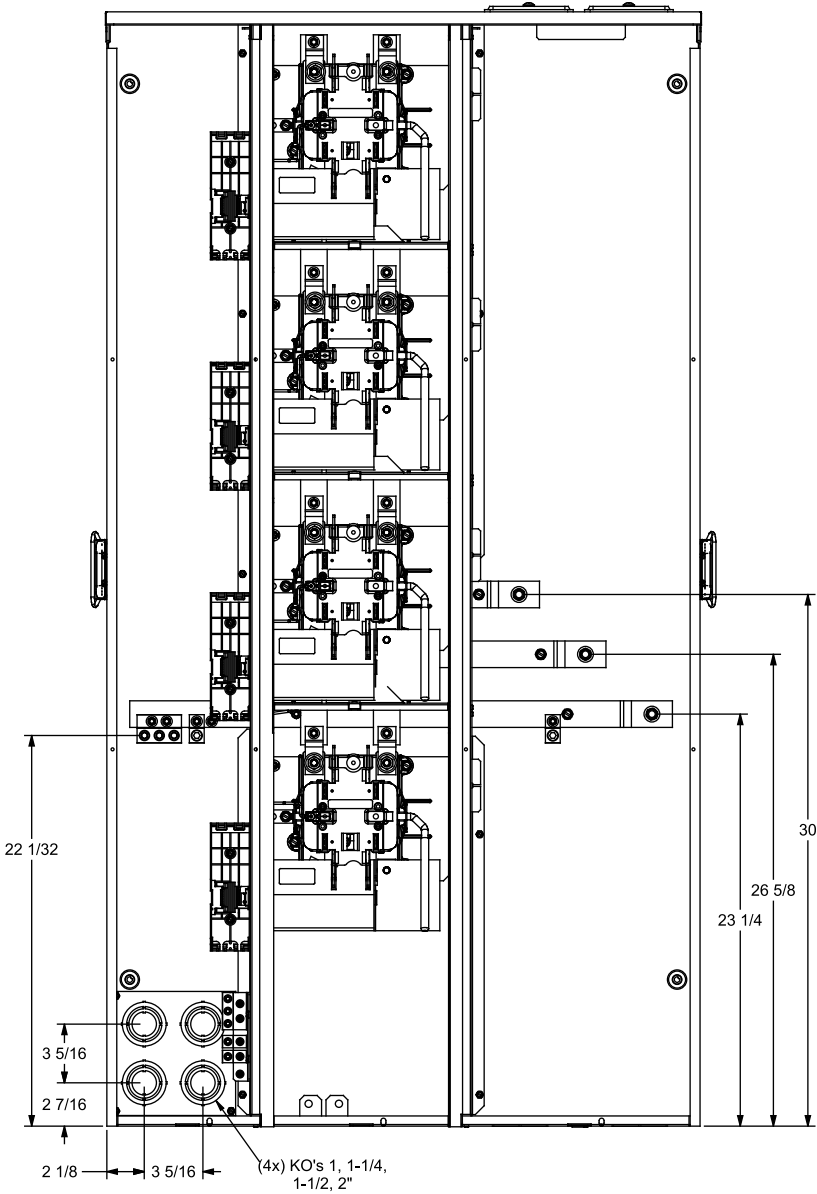

Accessories and Replacement Parts

Description	Catalog No.
5th Jaw	S35815-2
Meter Cover Plate, Ringless	EC0CP3
225A Breaker Mounting	ECMFBM2
Load Cover Screws	ECMFCS
Breaker Cover Repl.	ECBC
Ground/Ntl Bar Kit	ECMFGN125
QP Breaker Retainer	ECMBR2

Hubs


Trade Size (in)	Catalog No.
2"	EC56854
2-1/2"	EC56855
3"	EC56856
3-1/2"	EC56857
4"	EC56858
Closure Plate	EC56933S

Terminal Wire Sizes and Torques


(refer to schematic)

Terminal	Wire Size	Torque
A, B, N1	See Chart Below	
N2, G	300 kcmil - #4 AWG	275 LB-IN
Equip GND	#2/0 - 4 AWG	110 LB-IN
Lug Kit	Wire Size	Torque
H56476	800 kcmil - #3/0 AWG	500 LB-IN
H60162	600 kcmil - #4 AWG (2) 250 kcmil-#1/0 AWG	500 LB-IN
H68752-1	(3) 250 kcmil - #6 AWG	275 LB-IN
H56732	(2) 350 kcmil - #4 AWG	275 LB-IN
H56732M	(2) 500 kcmil - #4 AWG	375 LB-IN

Schematic

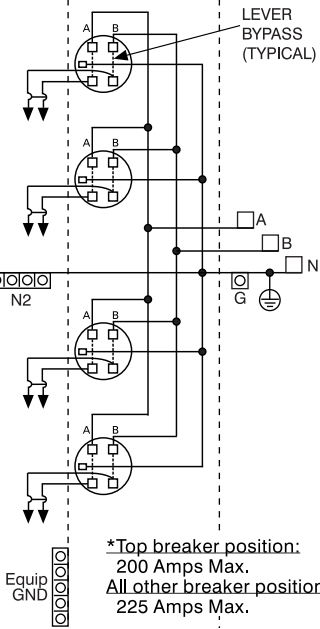

Enlarged Socket Detail

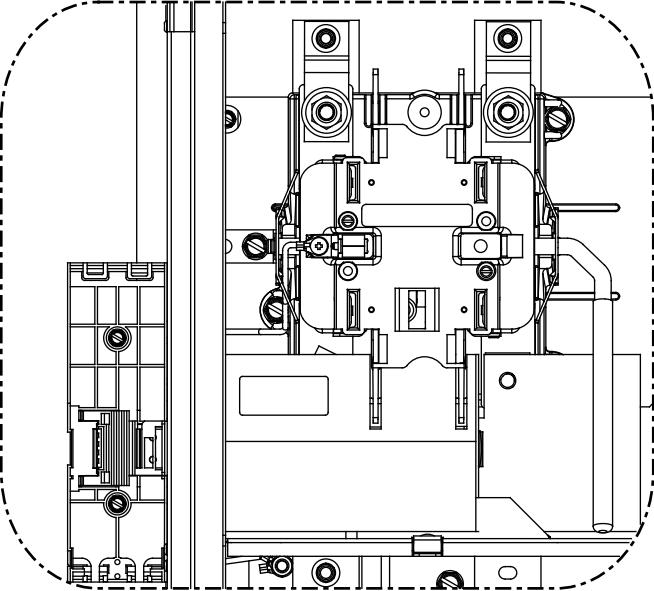

SIEMENS
Siemens Industry, Inc.

Uni-PAK Metering

Description: **WPL Series, Lever Bypass**
400A Bus, 4 Position, 200A Meter

KAM 6/5/15 DO NOT SCALE DRAWING Dwg No: WPL4412RJ