

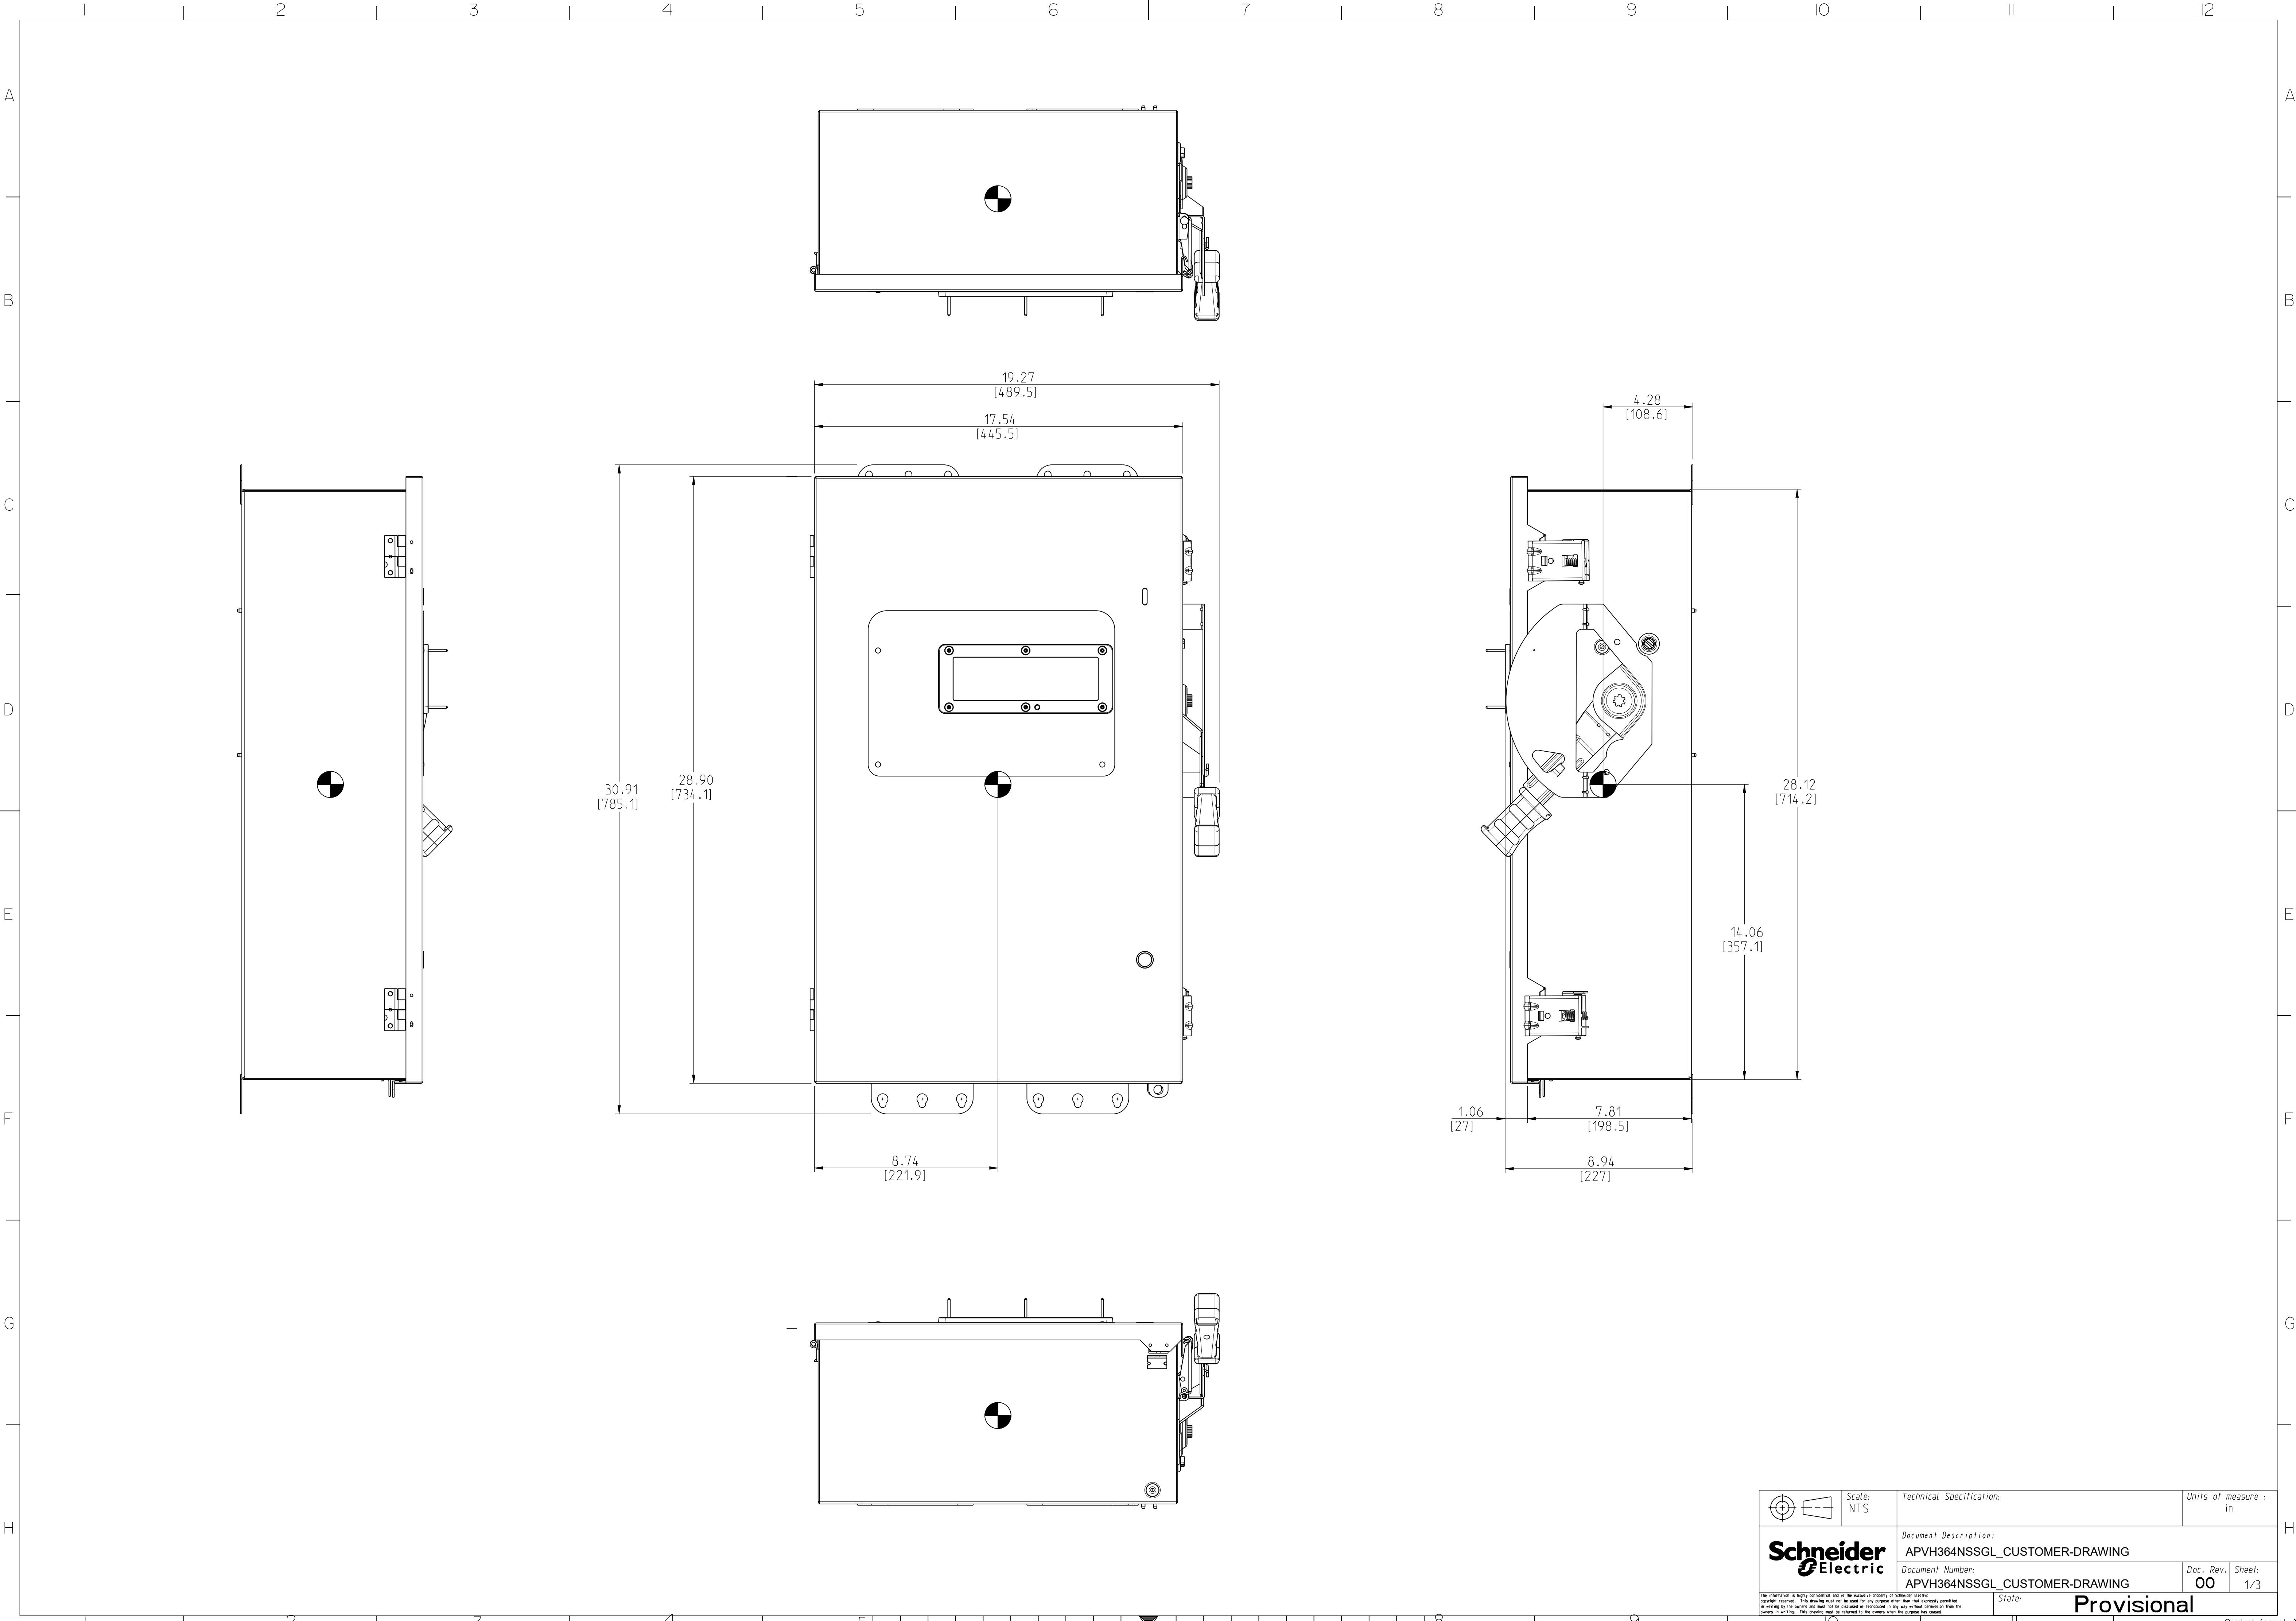


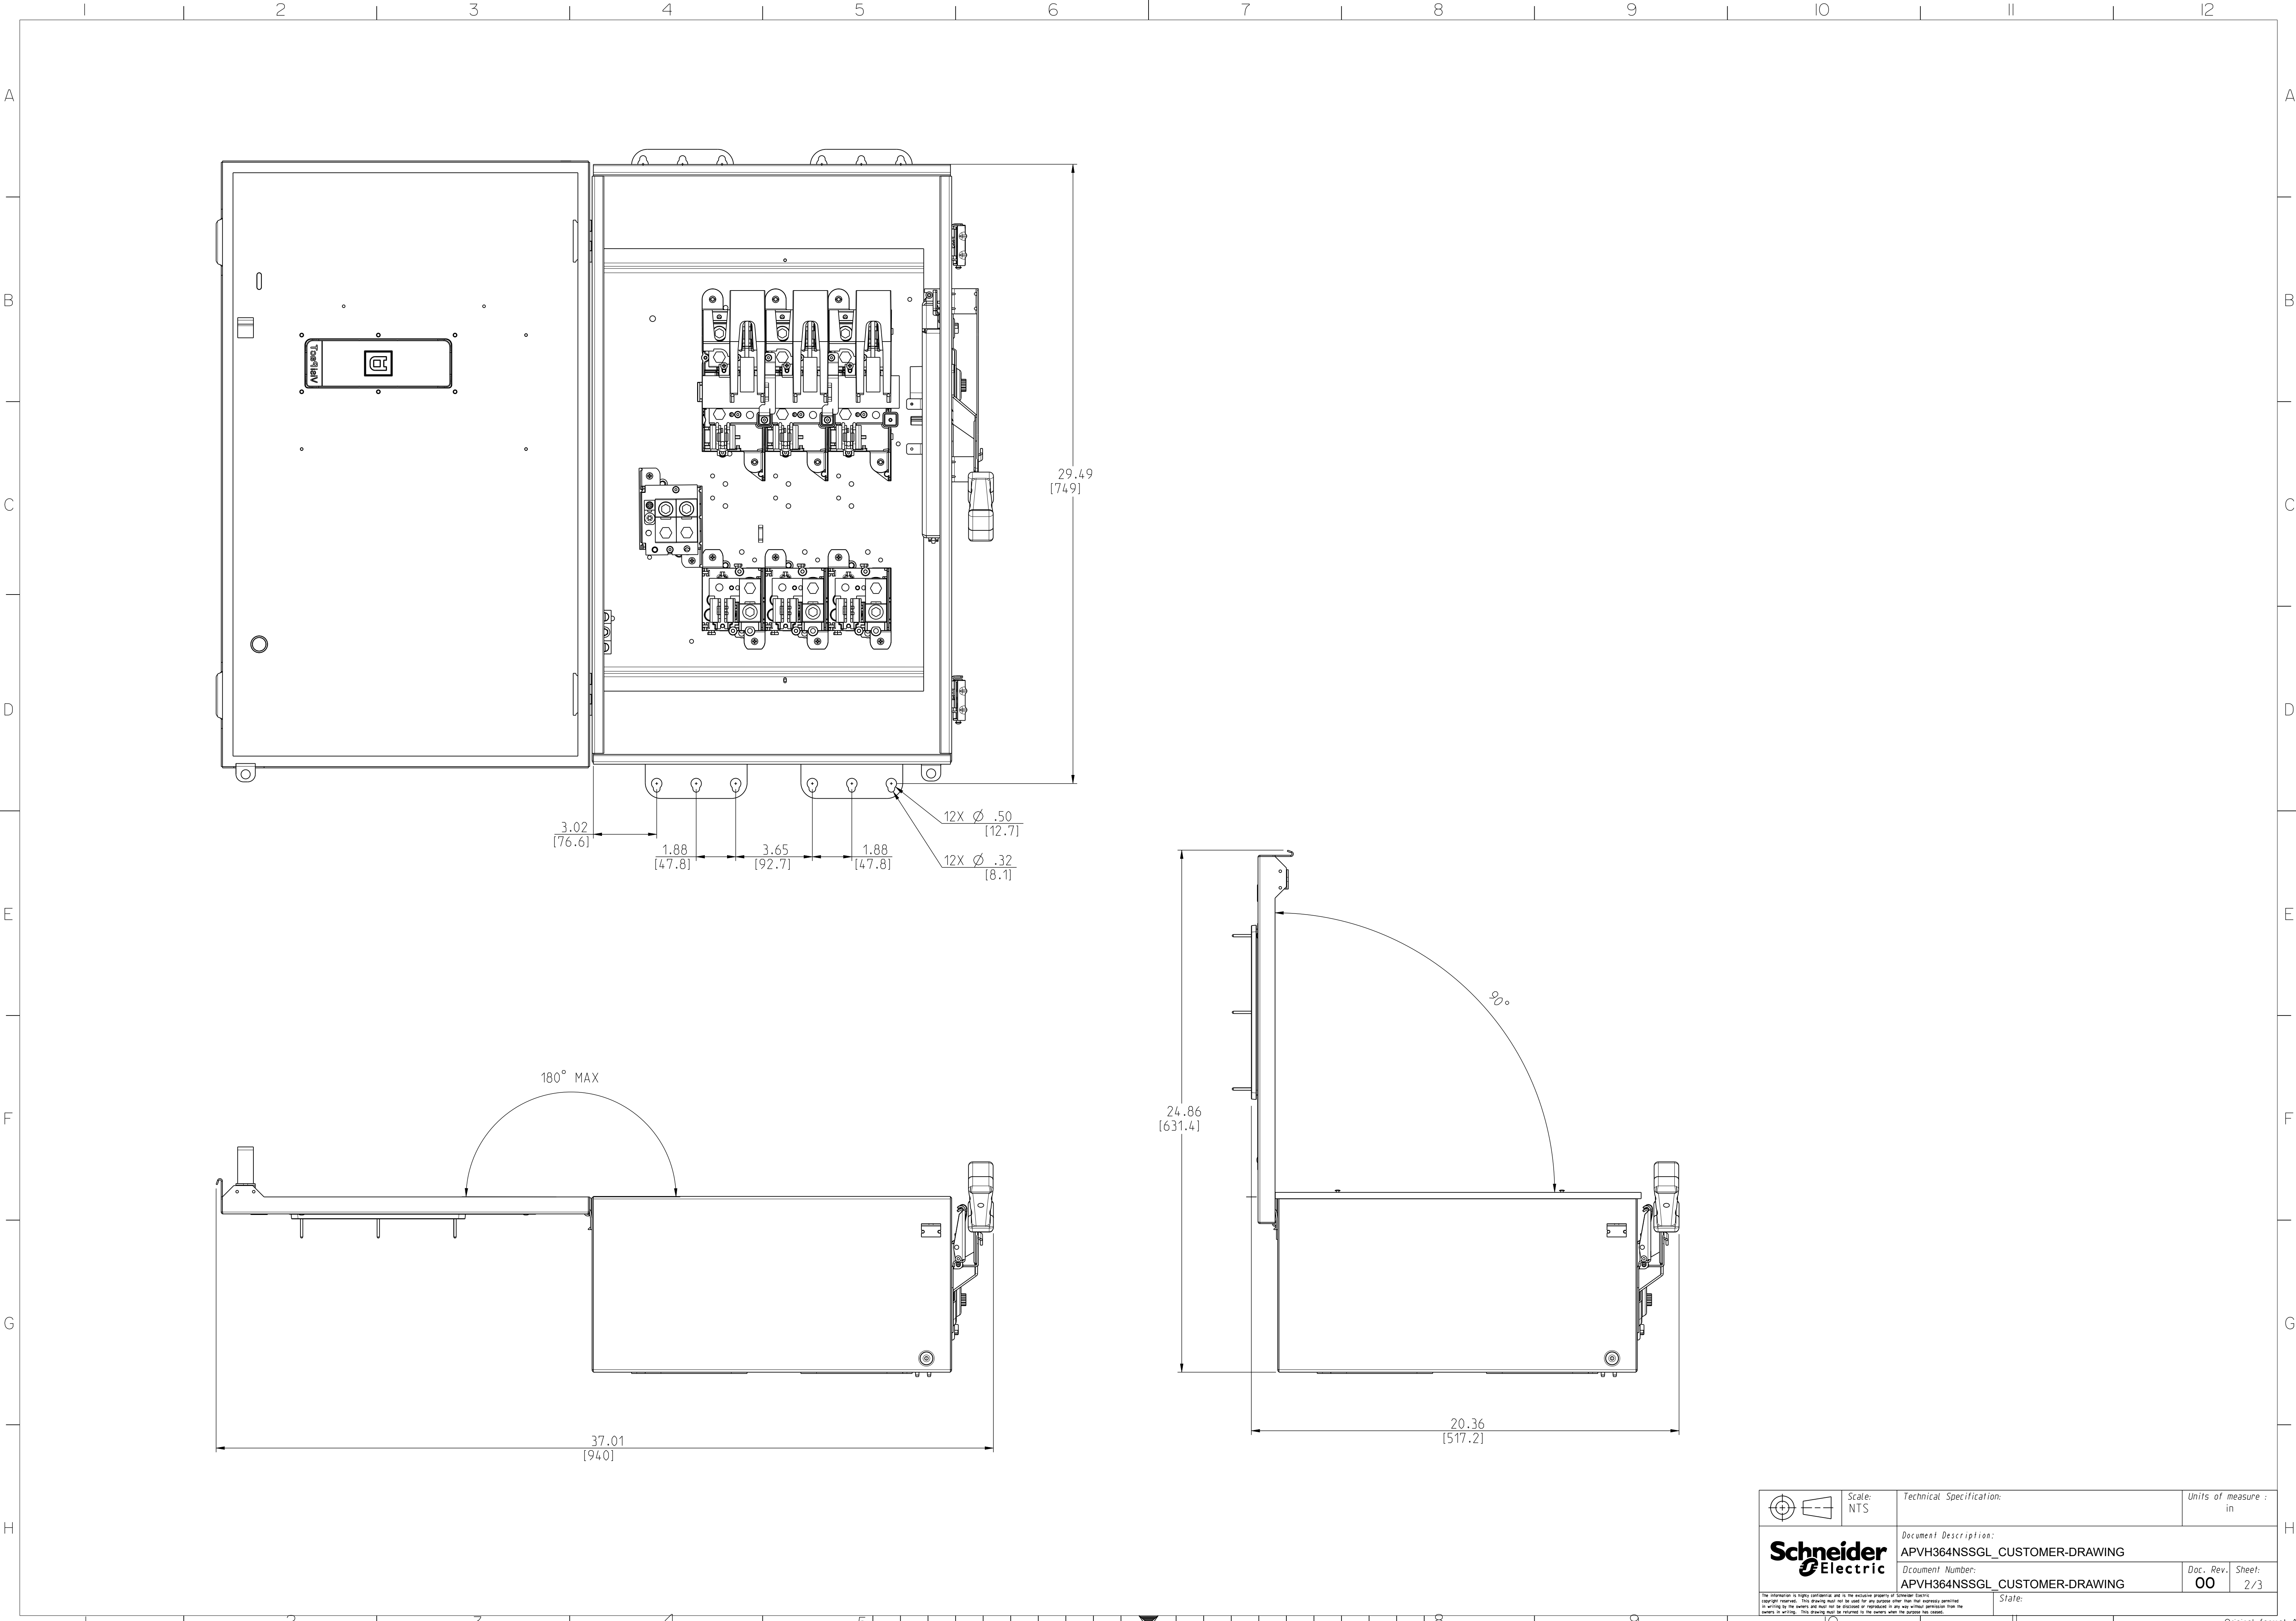

	Scale: NTS	Technical Specification:	Units of measure : in
	Document Description: APVH364NSSGL_CUSTOMER-DRAWING		
	Document Number: APVH364NSSGL_CUSTOMER-DRAWING	Doc. Rev. 00	Sheet: 1/3
	Provisional		


The information is highly confidential and is the exclusive property of Schneider Electric. It is not to be disclosed or reproduced in any way without permission from the Schneider Electric. This drawing must be retained in the Schneider Electric files.



	Scale: NTS	Technical Specification:	Units of measure : in
	Document Description: APVH364NSSGL_CUSTOMERS-DRAWING		
Document Number: APVH364NSSGL_CUSTOMERS-DRAWING		Doc. Rev. 00	Sheet: 2/3

The information is highly confidential and is the exclusive property of Schneider Electric. It is not to be disclosed or reproduced in any way without permission from the company. This drawing must be returned to the company with the original file closed.

State:

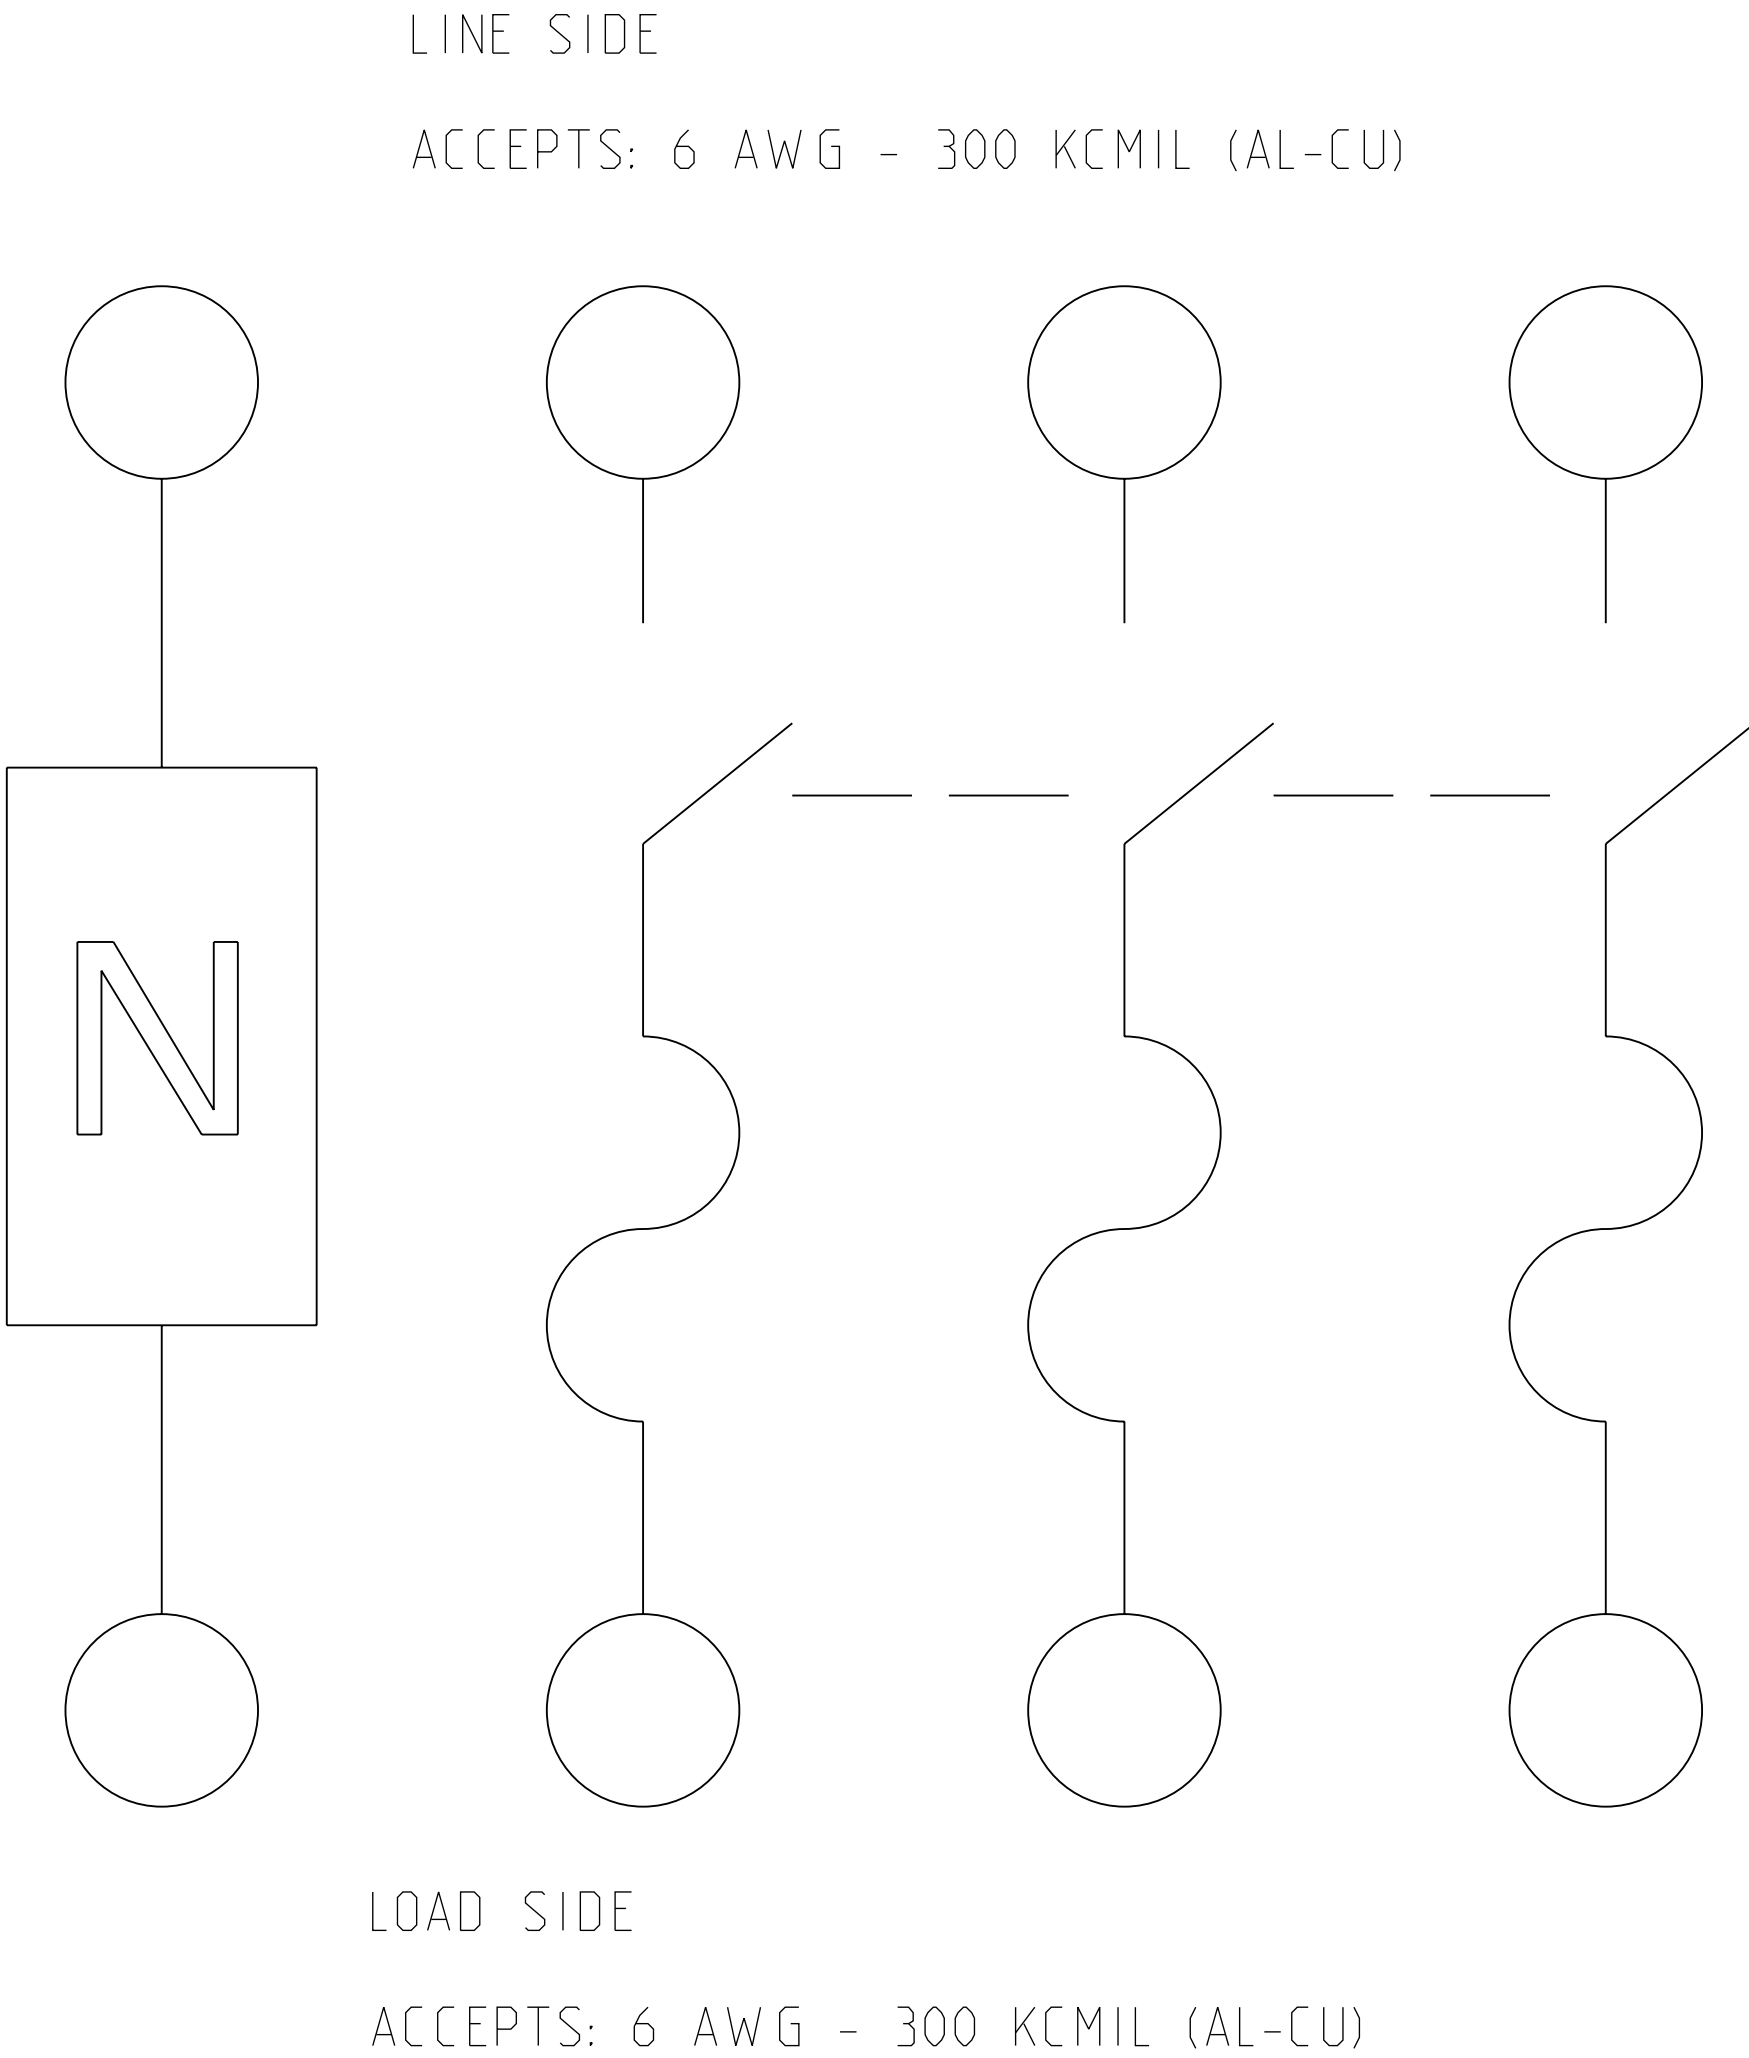

CATALOG NUMBER	VOLTAGE RATING	AMPERAGE RATING	ENCLOSURE RATING
VH364NSSGL	600VAC/VDC	200A	TYPE 4X

HORSEPOWER RATINGS			
VOLTS	∅	STD	MAX
*240V~	1	15	--
**240V~	3	25	60
*480V~	1	25	50
**480V~	3	50	125
*600V~	1	30	50
**600V~	3	60	150
*250V=	--	40	--
*600V=	--	50	--

*USE ANY TWO SWITCHING POLES

**IF CORNER GROUNDED DELTA, USE OUTER SWITCHING POLES FOR UNGROUNDED CONDUCTORS

ACCESORIES		
KIT	VOLTAGE	PART NUMBER
ELECTRICAL INTERLOCK	600V & 240V	EIK1, EIK2
CLASS R FUSE KITS	600V & 240V	HRK1020
INTERNAL BARRIER	600V & 240V	SS20
SOLID NEUTRAL ASSEMBLY	600V & 240V	SN20A for Al SN20C for Cu FOR CANADA: CSN20A for Al CSN20C for Cu
EQUIPMENT GROUNDING KIT	600V & 240V	PKOGTA2 for Al PKOGTC2 for Cu
TOUCH UP PAINT	600V & 240V	PK49SP
LOCK OFF/ON	600V & 240V	LOGK2
COPPER LUGS	600V & 240V	CL20F
DOUBLE LUG	600V & 240V	AL20DTF
COMPRESSION LUGS	600V & 240V	VCEL030516H1 for Al VCEL030516H1 for Cu

NOTES:

FINISH - 316 STAINLESS STEEL

LUGS SUITABLE FOR 75°C AL-CU CONDUCTORS

SHORT CIRCUIT CURRENT RATINGS:

10,000 RMS SYMMETRICAL AMPERES WHEN USED IN CONJUNCTION WITH CLASS H OR K FUSES.

200,000 RMS SYMMETRICAL AMPERES WHEN USED IN CONJUNCTION WITH CLASS R, J OR T FUSES.

ON 600V SWITCHES, 100,000 AMPERES MAX ON CORNER GROUNDED DELTA WHEN PROTECTED BY CLASS J OR R FUSES, 200 AMPERE MAX.

cULus LISTED - FILE E2875

SEISMIC NOTES:

USE (4) ¼” DIA GRADE 5 STEEL MOUNTING BOLTS AT SWITCH MOUNTING HOLES. MAX CONFIGURED WEIGHT 60 LB FOR THE PURPOSE OF DETERMINING SEISMIC ANCHORAGE REQUIREMENTS. FOR ALL OTHER APPLICATIONS, CONTACT SQUARE D COMPANY.

Scale: NTS

Technical Specification:

Units of measure : in

Document Description:

APVH364NSSGL_CUSTOMER-DRAWING

Document Number:

APVH364NSSGL_CUSTOMER-DRAWING

Doc. Rev.

00

Sheet:

3/3

The information is highly confidential and is the exclusive property of Schneider Electric. It is written by the experts and may not be disclosed or reproduced in any way without permission from the experts. It is written. This drawing must be retained in the company where the product has been used.

State: