



Features

- Adjustable CCT: 2700K - 3000K - 4000K
 - High color rendering index of 90+
 - 24V DC
 - Low power consumption at 4W
 - Ultra low profile surface mount
 - cETLus listed for dry locations
 - 35,000 hour rated life

Available CCT



2700K 3000K 4000K

Available Finishes

White

Control Options

- Single Color Controls
Requires Adaptive Driver + Receiver
 - Primary Side Dimming
Requires Standard Dimmer + Adaptive Driver

Listing / Ratings




Omni Slim 3CCT Puck Series

3CCT Omni Slim Puck is as versatile as it is sleek. Adjustable between 2700K, 3000K, 4000K as well as a black or white finish options (both included with each puck). Use in any accent, under-cabinet, in-cabinet, task, or any application. Especially when space is a concern.

Technical Information

Series	Omni Slim
Input Voltage	24V DC
CCT	2700K 3000K 4000K Adjustable
CRI	90+
Wattage	4W
Lumens	Up to 280Lm
Beam Angle	137°
Dimmable	5-100% (TRIAC ELV)
Mounting	Surface or recessed
Rating	cETLus Listed, Dry Location
Rated Life	35,000 hrs

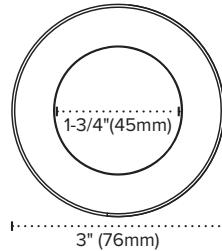

A diagram of a rectangular component with rounded corners and a central vertical dashed line, representing a surface mount ring. To the right of the ring, the text "11/16\" data-bbox="111 800 404 860" data-label="Text">

11/16" (17.5mm)

Omni Slim 3CCT Puck



OMNI SLIM


OMNISL-3CCT 4W / Up to 280Lm / 2700K | 3000K | 4000K

Includes: Attached 72" lead / (2) recessed trims in black and white / (2) surface trims in black and white


Primary Side Dimming Set-up



+

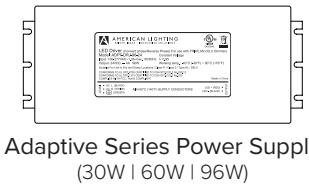

+

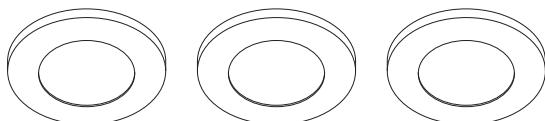

Omni Slim Puck Lights

CL | ELV Dimmer