

# Product Environmental Profile

## Evolution™ 4ATC Unequipped Series Poke-Thru Devices



### LEGRAND'S ENVIRONMENTAL COMMITMENTS

- **Incorporate environmental management into our industrial sites**

Of all Legrand sites worldwide, over 85% are ISO 14001-certified (sites belonging to the Group for more than five years).

- **Offer our customers environmentally friendly solutions**

Develop innovative solutions to help our customers design more energy efficient, better managed and more environmentally friendly installations.

- **Involve the environment in product design and provide informations in compliance with ISO 14025**

Reduce the environmental impact of products over their whole life cycle.

Provide our customers with all relevant information (composition, consumption, end of life, etc.).



### REFERENCE PRODUCT

<b>Function</b>	Connect a workstation remote from the wall to the energy and communication networks for 20 years, via 7 conduit openings.
<b>Reference Product</b>	
	<b>Cat. No. 4ATCGY</b>
	<b>Unwired Poke-Thru Assembly</b>

The company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in the document are for guidance and cannot be held binding on the company.



### PRODUCTS CONCERNED

The environmental data is representative of the following products (see extrapolation rule at the end of the document):  
4ATCBK, 4ATCBS, 4ATCGY, 4ATCNK, 4ATCBZ, 4ATCAL

# Product Environmental Profile

## Evolution™ 4ATC Unequipped Series Poke-Thru Devices

PEP  
ECO  
PASS  
PORT®

### CONSTITUENT MATERIALS

This Reference Product contains no substances prohibited by the regulations applicable at the time of its introduction to the market. It respects the restrictions on use of hazardous substances as defined in the RoHS directive 2011/65/CE.

<b>Total weight of Reference Product</b>	128.03oz (3630.0g) (with unit packaging)				
<b>Plastics as % of weight</b>	<b>Metals as % of weight</b>		<b>Other as % of weight</b>		
Other plastics	<b>0.9 %</b>	Steel	<b>38.4 %</b>	Intumescent materials	
PVC	<b>0.7 %</b>	Aluminium	<b>7.0 %</b>		
PA	<b>&lt; 0.1 %</b>	Zamak	<b>1.1 %</b>	<b>Packaging as % of weight</b>	
		Other metals	<b>1.0 %</b>	Wood	
		Copper alloys	<b>0.4 %</b>	Paper	
				PE	
<b>Total plastics</b>	<b>1.7 %</b>	<b>Total metals</b>	<b>47.9 %</b>	<b>Total other and packaging</b>	
				<b>50.4 %</b>	

Estimated recycled material content: 32 % by mass.



### MANUFACTURE

This Reference Product comes from sites that have received ISO14001 certification.



### DISTRIBUTION

Products are distributed from logistics centers located to optimize transport efficiency using EPA SmartWay® certified carriers to reduce greenhouse gases emissions. The Reference Product is therefore transported by truck from our warehouse to the local point of distribution into the market in North America, over a maximum range distance of 2175 miles [3500km].



### INSTALLATION

For the installation of the product, the drilling of a hole was taken into account but the add of silicone not provided with the product wasn't taken into account according to the PSR 0003 page 5 paragraph 3.2.



### USE

**Servicing and maintenance :**  
Under normal conditions of use, this product requires no servicing or maintenance.

#### Consumables :

No consumables are necessary to use the Reference Product.



### END OF LIFE

Development teams integrate product end-of-life factors in the design phase.

#### Hazardous waste\* contained in the product:

no hazardous waste  
(\*) Hazardous waste as defined by European Commission decision 2000/532/EC.

#### • Recycling rate:

Calculated using the method described in the IEC/TR 62635 technical report, the recyclability rate of the product is estimated as 90 %. This value is based on data collected from a technological channel using industrial procedures. It does not pre-validate the effective use of this channel for end-of-life electrical and electronic products.

Separated into:

- metal materials (excluding packaging) : 48.2 %
- plastic materials (excluding packaging) : 0.8 %
- packaging (all types of materials) : 41.0 %

# Product Environmental Profile

## Evolution™ 4ATC Unequipped Series Poke-Thru Devices



### ENVIRONMENTAL IMPACTS

The evaluation of environmental impacts examines the stages of the Reference Product life cycle: manufacturing, distribution, installation, use and end-of-life. It is representative from products marketed and used in North America.

For each phase, the following modelling elements were taken in account:

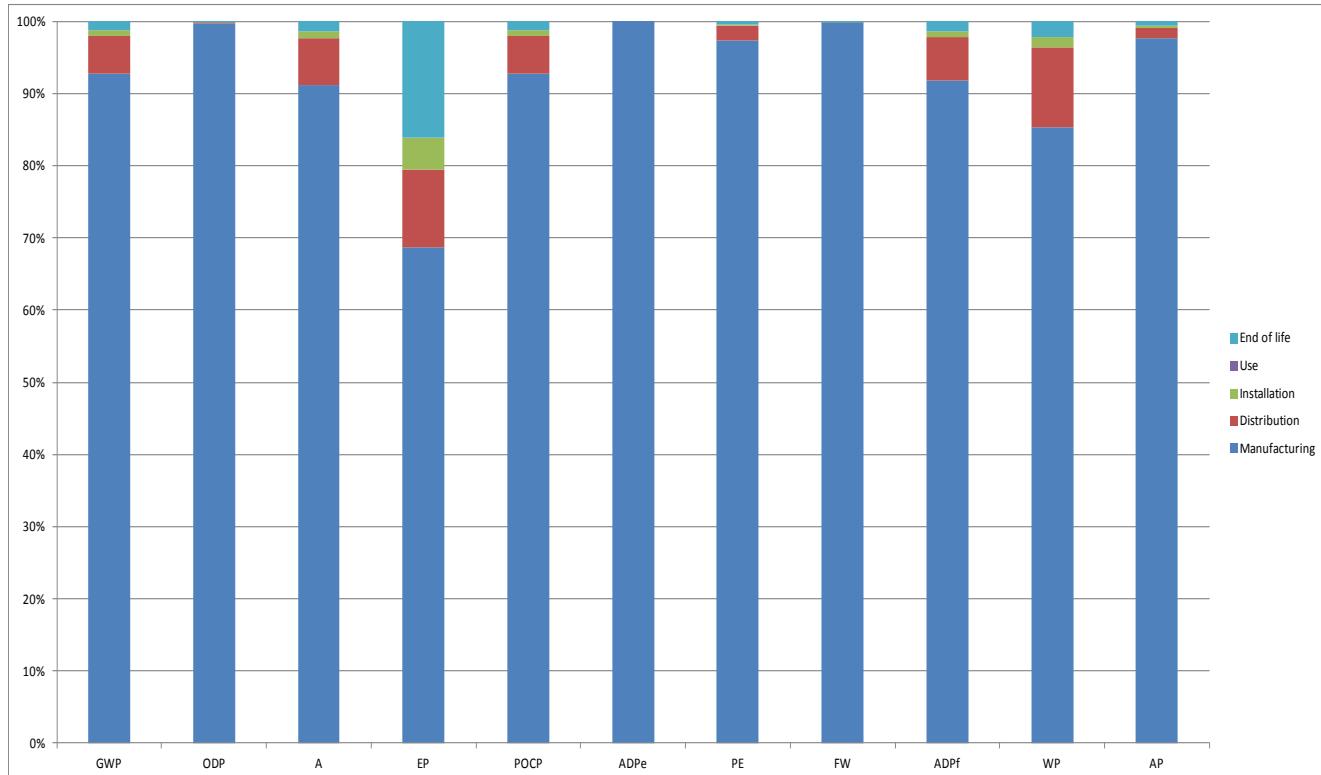
<b>Manufacture</b>	Packaging taken into account. As required by the «PEP ecopassport» programme all transports for the manufacturing of the Reference Product, including materials and components, has been taken in account. The waste generated during manufacturing phase has been taken into account.
<b>Distribution</b>	Transport between the last Group distribution centre and an average delivery to the sales area. 2175 miles [3500km], generic data as defined by the PCR version: PEP-PCR-ed 3-EN-2015 04 02.
<b>Installation</b>	The end-of-life of the packaging is taken into account at this phase
<b>Use</b>	<ul style="list-style-type: none"> <li>Under normal conditions of use, this type of product requires no servicing or maintenance.</li> <li>No consumables are necessary to use this type of product.</li> <li>Product category: PSR0003-ed1.1-EN-2015_10_16-Cable_Management_Solutions §3.2.3.1. Non-equipped service poles, service posts and multi-outlets extension.</li> <li>Use scenario : no energy consumption during 20 year working life. This modelling duration does not constitute a minimum durability requirement.</li> <li>Energy model: Electricity Mix; United States - 2009.</li> </ul>
<b>End of life</b>	The default end of life scenario maximizing the environmental impacts
<b>Software and database used</b>	EIME V5 and its database «CODDE-2015-04» and the indicators defined in the PCR ed3 in alignment with the EN 15804 standard.



### SELECTION OF ENVIRONMENTAL IMPACTS

	Total for Life cycle		Raw material and manufacture		Distribution		Installation		Use		End of life	
<b>Global warming</b>	<b>1.30E+01</b>	<b>kgCO2 eq.</b>	1.15E+01	<b>89%</b>	9.09E-01	<b>7%</b>	3.63E-01	<b>3%</b>	0.00E+00	<b>0%</b>	1.54E-01	<b>1%</b>
<b>Ozone depletion</b>	<b>1.78E-06</b>	<b>kgCFC-11 eq.</b>	1.77E-06	<b>99%</b>	6.30E-09	<b>&lt; 1%</b>	5.44E-09	<b>&lt; 1%</b>	0.00E+00	<b>0%</b>	1.80E-09	<b>&lt; 1%</b>
<b>Acidification of soils and water</b>	<b>4.68E-02</b>	<b>kgSO2 eq.</b>	4.23E-02	<b>91%</b>	3.11E-03	<b>7%</b>	6.65E-04	<b>1%</b>	0.00E+00	<b>0%</b>	6.35E-04	<b>1%</b>
<b>Water eutrophication</b>	<b>6.59E-03</b>	<b>kg(PO4)3- eq.</b>	4.56E-03	<b>69%</b>	7.23E-04	<b>11%</b>	3.36E-04	<b>5%</b>	0.00E+00	<b>0%</b>	9.76E-04	<b>15%</b>
<b>Photochemical ozone formation</b>	<b>3.99E-03</b>	<b>kgC2H4 eq.</b>	3.63E-03	<b>91%</b>	2.44E-04	<b>6%</b>	7.08E-05	<b>2%</b>	0.00E+00	<b>0%</b>	4.81E-05	<b>1%</b>
<b>Depletion of abiotic resources - elements</b>	<b>1.03E-04</b>	<b>kgSb eq.</b>	1.03E-04	<b>100%</b>	2.80E-08	<b>&lt; 1%</b>	6.34E-09	<b>&lt; 1%</b>	0.00E+00	<b>0%</b>	7.42E-09	<b>&lt; 1%</b>
<b>Total use of primary energy</b>	<b>4.39E+02</b>	<b>MJ</b>	4.20E+02	<b>96%</b>	1.22E+01	<b>3%</b>	4.86E+00	<b>1%</b>	0.00E+00	<b>0%</b>	1.79E+00	<b>&lt; 1%</b>
<b>Net use of fresh water</b>	<b>9.57E-02</b>	<b>m<sup>3</sup></b>	9.46E-02	<b>99%</b>	5.46E-04	<b>&lt; 1%</b>	5.08E-04	<b>&lt; 1%</b>	0.00E+00	<b>0%</b>	6.59E-05	<b>&lt; 1%</b>
<b>Depletion of abiotic resources - fossil fuels</b>	<b>1.60E+02</b>	<b>MJ</b>	1.39E+02	<b>87%</b>	1.33E+01	<b>8%</b>	5.58E+00	<b>3%</b>	0.00E+00	<b>0%</b>	2.07E+00	<b>1%</b>
<b>Water pollution</b>	<b>1.02E+03</b>	<b>m<sup>3</sup></b>	8.50E+02	<b>84%</b>	1.18E+02	<b>12%</b>	2.72E+01	<b>3%</b>	0.00E+00	<b>0%</b>	2.08E+01	<b>2%</b>
<b>Air pollution</b>	<b>1.92E+03</b>	<b>m<sup>3</sup></b>	1.83E+03	<b>95%</b>	4.94E+01	<b>3%</b>	3.06E+01	<b>2%</b>	0.00E+00	<b>0%</b>	1.13E+01	<b>&lt; 1%</b>

The values of the 27 impacts defined in the PCR-ed3-EN-2015 04 02 are available in the digital database of pep-ecopassport.org website.

**Product Environmental Profile****Evolution™ 4ATC Unequipped Series Poke-Thru Devices****% ENVIRONMENTAL IMPACT PER LIFE CYCLE STAGE OF REFERENCE PRODUCT**

The environmental impacts of each phase of the lifecycle are the same for all the different finish painting.

Registration N°: LGRP-00638-V01.01-EN

Drafting rules: PEP-PCR-ed3-EN-2015\_04\_02  
Supplemented by PSR0003-ed1.1-EN-2015\_10\_16

Verifier accreditation N°: VH02

Information and reference documents : [www.pep-ecopassport.org](http://www.pep-ecopassport.org)

Date of issue: 01-2018

Validity period: 5 years

Independent verification of the declaration and data, in compliance with ISO 14025:2010

Internal  External 

The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)

PEP are compliant with XP C08-100-1: 2014

The elements of the present PEP cannot be compared with elements from another program

Document in compliance with ISO 14025 : 2010: «Environmental labels and declarations. Type III environmental declarations»

Environmental data in alignment with EN 15804 : 2012 + A1 : 2013

