

# Product End of Life Instructions

**ATV630 CAB INT IP00/UL type 12 90KW 400V WO KEYPAD**

**Altivar Process**



**Schneider**  
Electric




## Potential disassembly risks



## **ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH.**

- To service, remove all power.
- Wait 15 minutes
- Verify no voltage is present.

**Failure to comply  
will result in death  
or serious injury**

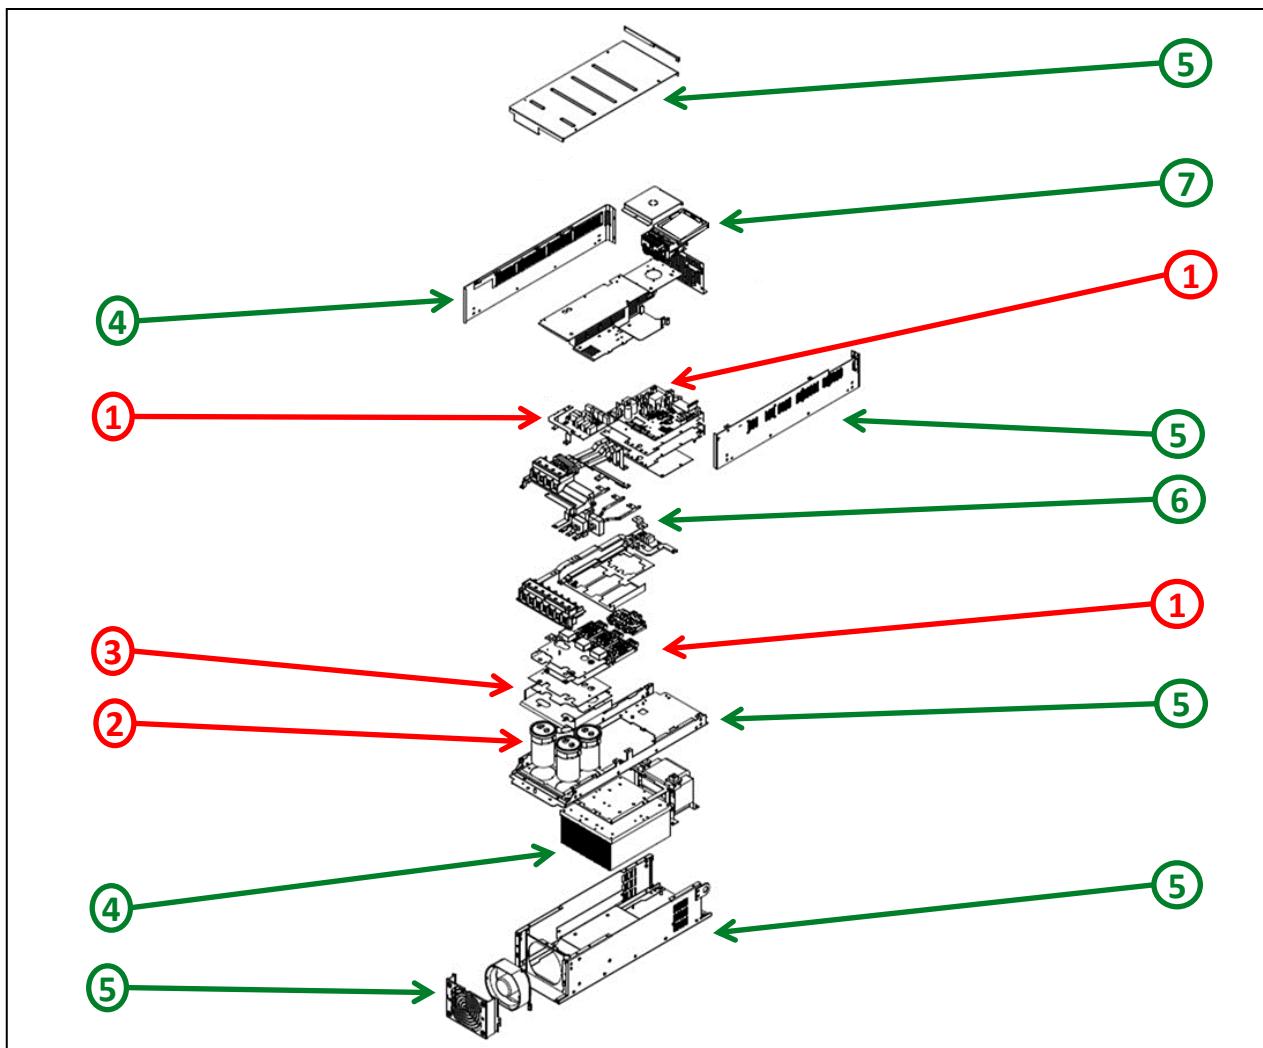

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	3	Cable (high current)	1272	
To be depolluted	1	Electronic Board (Power) > 10cm <sup>2</sup>	4630	
To be depolluted	1	Electronic Board (Communication) > 10cm <sup>2</sup>	178	
To be depolluted	2	Electrolyte capacitors which size: height > 25 mm, diameter > 25 mm or proportionately similar volume	3200	
To be dismantled	4	Aluminium	10916	heatsink, bar
To be dismantled	5	Steel	21495	chassis, houssing, cover, bar
To be dismantled	6	Copper	1176	bar
To be dismantled	7	Polymer	293	chassis, houssing
Other			13840	



## Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The main function of the Altivar Process product range is the speed control and variation of a synchronous, asynchronous or reluctance electric motor for fluid management and industrial applications.
Product reference	ATV630D90N4ZU
Total representative product mass	57000 g
Representative product dimensions	748mm x 265mm x 306,9mm
Accessories	No accessories needed.
Date of information release	09/2020



## Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
In case of special transportation: transportation method	No special transportation.	
Recyclability potential	77%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS

Country Customer Care Center

<http://www.schneider-electric.com/contact>

35 rue Joseph Monier

CS 30323

FR 92500 Rueil Malmaison

RCS Nanterre 954 503 439

Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

© 2020 - Schneider Electric – All rights reserved

09/2020

ENVEOLI2007013\_V1