

**PTTR26262HG****PTTR26362HG**


PlugTail™. The fastest, most consistent and reliable wiring devices – ever.

PTTR26262HG, PTTR26362HG

Factory-terminated devices and connectors mean that device installation is the same regardless of skill level of the installer. The UL-Listed connectors are keyed to ensure proper wiring installation into each extra heavy-duty receptacle. The connector simply snaps into the back of the device — no fussing with wires, stripping, or tightening screws. PlugTail devices are finger safe with no exposed terminals, so taping is not required.

A sturdy mechanical shutter system helps prevent children from sticking objects into the receptacle. The toughest and safest hospital grade tamper-resistant receptacle available.

Features & Benefits

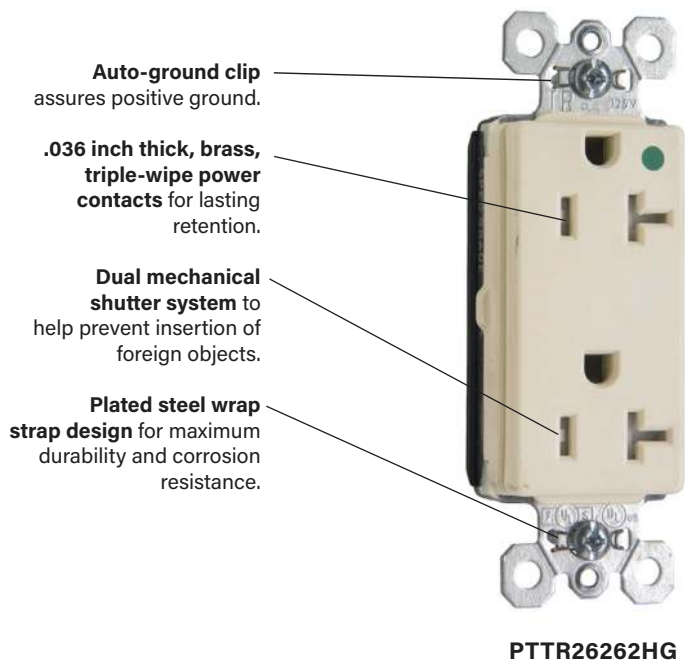**PTTR26262HG**


Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.

No exposed terminals create a finger safe application before, during, and after installation.

Pre-stripped connector leads fasten to conductors, easier than standard pigtails.

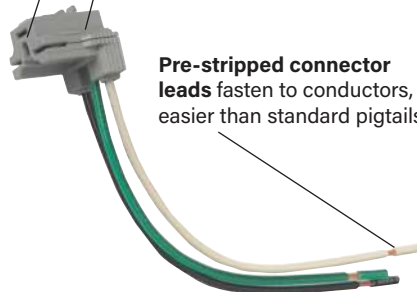

3rd Party Compliance



cULus Listed, File Number E140596, Standard UL498.
Federal Specification WC596.
Conforms to NEMA WD-1 and WD-6, Hospital Grade.

Technical Information

Performance

Electrical

Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30° C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are a permanent part of the device

Environmental


Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

Materials

Face	Nylon
Back Body	PVC
Assembly Drive Screw	Zinc-Plated Steel
Tamper Shutter	Thermoplastic
Line Contacts	.036 688 Brass
Auto-Ground Clip	Steel
Mounting Strap	.042 Zinc-Plated Steel
Mounting Screws	Tri-Drive Steel

PlugTail Connector Materials


Housing	Polycarbonate
Contacts	.030 Brass

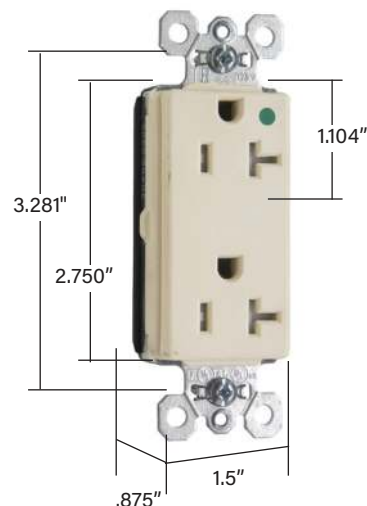

**Dimensions for
15 & 20 Amp
PTTR26362HG**

Warranty

1 Year
C.O.O. Mexico

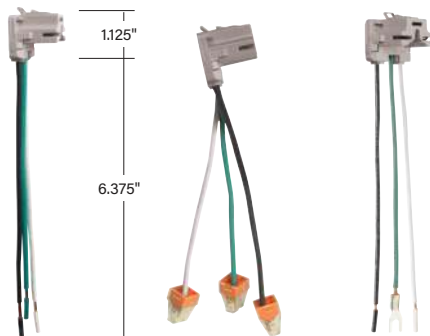

Ordering Information

Catalog Number	Description	Rating		Color
		A.	V.	
Hospital Grade Receptacles				
PT26362HGBL	PT DUP DECO HG	20	125	Blue
PT26362HGCDW	PT DECO DUAL CONT	20	125	White
PT26362HGGRY	PT DUP DECO HG	20	125	Gray
PT26362HGI	PT DUP DECO HG	20	125	Brown
PT26362HGLA	PT DUP DECO HG	20	125	Light Almond
PT26362HGOR	PT DUP DECO HG	20	125	Orange
PT26362HGRED	PT DUP DECO HG	20	125	Red
PT26362HGW	PT DUP DECO HG	20	125	White
PT26262HGGRY	PT DUP DECO HG	15	125	Gray
PT26262HGI	PT DUP DECO HG	15	125	Ivory
PT26262HGOR	PT DUP DECO HG	15	125	Orange
PT26262HGRED	PT DUP DECO HG	15	125	Red
PT26262HGW	PT DUP DECO HG	15	125	White



NEMA
5-15R



NEMA
5-20R

Catalog Number	Wire Type	Wire Length
PlugTail Connectors - Right Angle		
PTRA6SOL	Solid	6"
PTRA6STR	Stranded	6"
PTRA6SOLB25	Solid	25"
PTRA6STRB25	Stranded	25"
PlugTail Connectors - Right Angle with WAGO Connectors		
PTRA6SOLBP	Solid	6"
PTRA6STRBP	Stranded	6"
PlugTail Connectors - Right Angle with Ground Screw		
PTRA6SOLG	Solid	6"
PTRA6STRG	Stranded	6"

Vertical Markets

- Health Care
- Education
- Institutional

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.