

# Product data sheet

Specifications

SQUARE D



Industrial control transformer, Type TF, 1 phase, 200VA, 240x480V primary, 120V secondary, 50/60Hz

9070TF200D1

Product availability: Stock - Normally stocked in distribution facility

## Main

Product or Component Type Industrial Control Transformer

Type TF

## Complementary

Number of Phases 1 phase

Power Rating 200 VA UL  
200 VA CSA  
200 VA NOM  
200 VA CE

Primary to Secondary Voltage 240 x 480 V 120 V  
230 x 460 V 115 V  
220 x 440 V 110 V

Fuse type 0.41 x 1.50 in CC top

Temperature rise 80 °C

Electrical Connection Screw clamp terminals

Height 4.5 in (114.3 mm)

Width 3.75 in (95.25 mm)

Depth 3.59 in (91.19 mm)

Material Copper: winding

Fingersafe Cover Compatibility FSC1

## Environment

Product Certifications CSA file LR37055 guide 184-N-90  
UL listed file E61239

Enclosure Type Not rated (open device)

Insulation temperature 266 °F (130 °C)

## Ordering and shipping details

Category US10CP816202

Discount Schedule 0CP8

GTIN 785901904809

Returnability Yes

Country of origin MX

## Packing Units

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

<b>Unit Type of Package 1</b>	PCE
<b>Nbr. of units in pkg.</b>	1
<b>Package 1 Height</b>	6.00 in (15.240 cm)
<b>Package 1 Width</b>	6.30 in (16.002 cm)
<b>Package 1 Length</b>	7.20 in (18.288 cm)
<b>Package weight(Lbs)</b>	6.210 lb(US) (2.817 kg)
<b>Unit Type of Package 2</b>	PAL
<b>Number of Units in Package 2</b>	150
<b>Package 2 Height</b>	40.00 in (101.600 cm)
<b>Package 2 Width</b>	40.00 in (101.600 cm)
<b>Package 2 Length</b>	48.00 in (121.920 cm)
<b>Package 2 Weight</b>	953.000 lb(US) (432.273 kg)

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Environmental footprint

Environmental Disclosure

[Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic No

[EU RoHS Directive](#) Compliant with Exemptions

REACH Regulation [REACH Declaration](#)

California proposition 65   
 WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](#)

PVC free Yes

## Use Again


### Repack and remanufacture

Circularity Profile No need of specific recycling operations

Take-back No


## Technical Illustration

## Dimensions

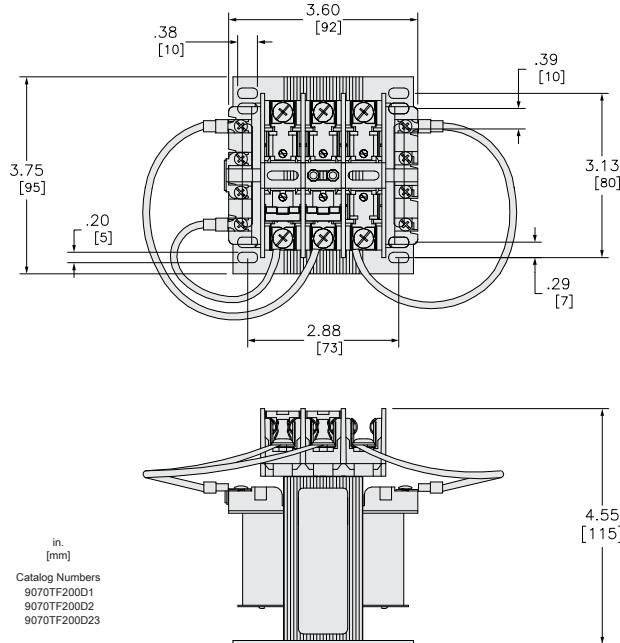

## Technical Illustration

## Wiring diagram

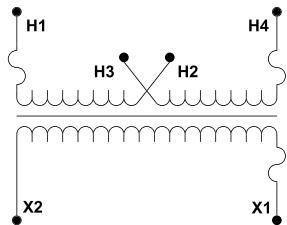

## Options

Voltage Code	Voltages		Connections	
	Primary	Secondary	Primary	Secondary
D1	220 x 440 230 x 460 240 x 480	110 115 120	220 or 230 or 240; Connect to H1 and H4 Jumper H1 with H3 Jumper H2 with H4 440 or 460 or 480; Connect to H1 and H4 Jumper H2 with H3	Connect to X1 and X2

REFER TO TECHNICAL DOCUMENTATION FOR COMPLETE INFORMATION.