



M-14626


2

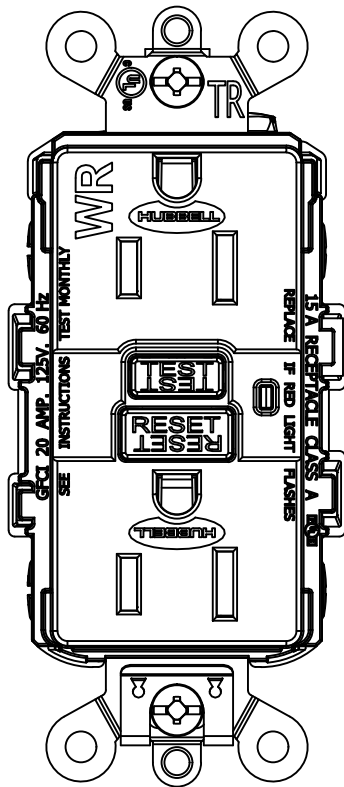


15A DEVICE

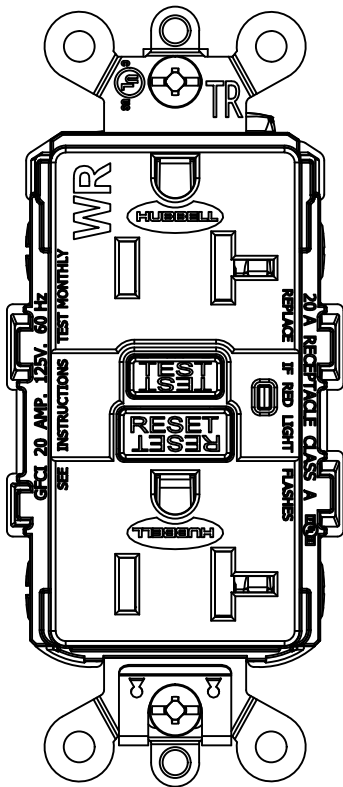


20A DEVICE

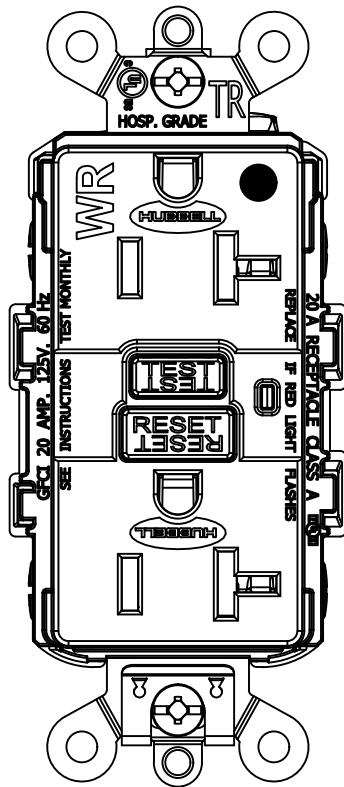

20A HOSP. GRADE DEVICE

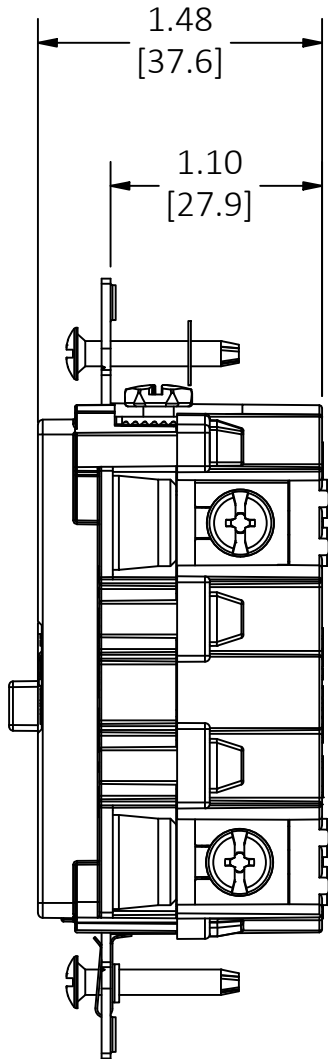

SIDE VIEW
(SAME FOR ALL DEVICES)

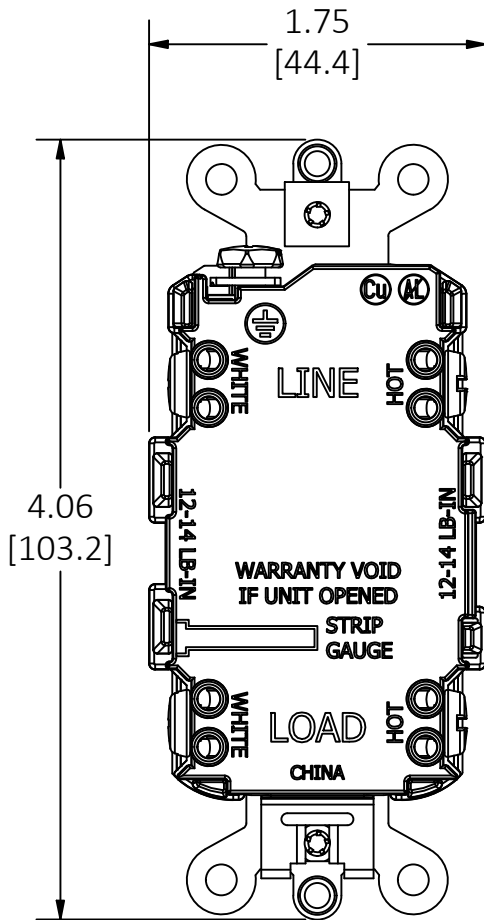

BACK VIEW
(SAME FOR ALL DEVICES)

CONFIGURATION	BROWN	IVORY	WHITE	GRAY	BLACK	RED	RATING
15A	GFSG5262	GFSG5262I	GFSG5262W	GFSG5262GRY	GFSG5262BLK	GFSG5262R	15A / 125V
20A	GFSG5362	GFSG5362I	GFSG5362W	GFSG5362GRY	GFSG5362BLK	GFSG5362R	20A / 125V
15A HOSP. GRADE	GFSG8200	GFSG8200I	GFSG8200W	GFSG8200GRY	GFSG8200BLK	GFSG8200R	15A / 125V
20A HOSP. GRADE	GFSG8300	GFSG8300I	GFSG8300W	GFSG8300GRY	GFSG8300BLK	GFSG8300R	20A / 125V

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
FACE	PC/PBT (VALOX 357U)	-
BASE	NYLON 66 (ZYTEL 101F)	-
BRIDGE	BRASS	NICKEL PLATED
CONTACTS	BRASS	NICKEL PLATED
MOUNTING SCREWS	STAINLESS STEEL	-
TERMINAL SCREWS	STAINLESS STEEL	-
CLAMP PLATES	BRASS	NICKEL PLATED

2	REVISED ALL CAT NOS IN TABLE; CHANGED DESCRIPTIONS BELOW DEVICE VIEWS TO REMOVE TR-WR PER EC TBD	MV	XX/XX/XX
1	INITIAL RELEASE PER EC 220909023860 MV	MV	9/15/22
REV	DESCRIPTION	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE.
DIMENSIONS ARE IN INCHES [mm].

TITLE

CUSTOMER DWG.
INDUSTRIAL GFCI 1.5

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

TOLERANCES UNLESS
OTHERWISE SPECIFIED
.XX = ± .01
.XXX = ± .005
ANGLE TOL. ±2°

DR. BY MV
CHK. BY KP

SCALE 1 : 1
DATE 9/15/22