

# Product data sheet

Specifications



IEC contactor, TeSys Deca, nonreversing, 32A, 20HP at 480VAC, up to 100kA SCCR, 3 phase, 3 NO, 230VAC 50/60Hz coil, open

LC1D32P7

**Product availability:** Stock - Normally stocked in distribution facility

## Main

Range	TeSys TeSys Deca
Range of Product	TeSys Deca
Product or Component Type	Contactor
Device short name	LC1D
Contactor application	Resistive load Motor control
Utilisation category	AC-3 AC-1 AC-3e
Poles description	3P
[Ue] rated operational voltage	Power circuit <= 690 V AC 25...400 Hz Power circuit <= 300 V DC
[Ie] rated operational current	32 A (at <140 °F (60 °C)) at <= 440 V AC AC-3 for power circuit 50 A (at <140 °F (60 °C)) at <= 440 V AC AC-1 for power circuit 32 A (at <140 °F (60 °C)) at <= 440 V AC AC-3e for power circuit
[Uc] control circuit voltage	230 V AC 50/60 Hz

## Complementary

Motor power kW	7.5 kW at 220...230 V AC 50/60 Hz (AC-3) 15 kW at 380...400 V AC 50/60 Hz (AC-3) 15 kW at 415...440 V AC 50/60 Hz (AC-3) 18.5 kW at 500 V AC 50/60 Hz (AC-3) 18.5 kW at 660...690 V AC 50/60 Hz (AC-3) 7.5 kW at 400 V AC 50/60 Hz (AC-4) 7.5 kW at 220...230 V AC 50/60 Hz (AC-3e) 15 kW at 380...400 V AC 50/60 Hz (AC-3e) 15 kW at 415...440 V AC 50/60 Hz (AC-3e) 18.5 kW at 500 V AC 50/60 Hz (AC-3e) 18.5 kW at 660...690 V AC 50/60 Hz (AC-3e)
Maximum Horse Power Rating	2 hp at 115 V AC 50/60 Hz for 1 phase motors 5 hp at 230/240 V AC 50/60 Hz for 1 phase motors 10 hp at 200/208 V AC 50/60 Hz for 3 phase motors 10 hp at 230/240 V AC 50/60 Hz for 3 phase motors 20 hp at 460/480 V AC 50/60 Hz for 3 phase motors 25 hp at 575/600 V AC 50/60 Hz for 3 phase motors
Compatibility code	LC1D
Pole contact composition	3 NO
Protective cover	With

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>[I<sub>th</sub>] conventional free air thermal current</b>	10 A (at 140 °F (60 °C)) for signalling circuit 50 A (at 140 °F (60 °C)) for power circuit
<b>I<sub>rms</sub> rated making capacity</b>	140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1 550 A at 440 V for power circuit conforming to IEC 60947
<b>Rated breaking capacity</b>	550 A at 440 V for power circuit conforming to IEC 60947
<b>[I<sub>cw</sub>] rated short-time withstand current</b>	60 A 104 °F (40 °C) - 10 min for power circuit 138 A 104 °F (40 °C) - 1 min for power circuit 260 A 104 °F (40 °C) - 10 s for power circuit 430 A 104 °F (40 °C) - 1 s for power circuit 100 A - 1 s for signalling circuit 120 A - 500 ms for signalling circuit 140 A - 100 ms for signalling circuit
<b>Associated fuse rating</b>	10 A gG for signalling circuit conforming to IEC 60947-5-1 63 A gG at <= 690 V coordination type 1 for power circuit 63 A gG at <= 690 V coordination type 2 for power circuit
<b>Average impedance</b>	2 mOhm - I <sub>th</sub> 50 A 50 Hz for power circuit
<b>Power dissipation per pole</b>	2 W AC-3 5 W AC-1 2 W AC-3e
<b>[U<sub>i</sub>] rated insulation voltage</b>	Power circuit 600 V CSA Power circuit 600 V UL Signalling circuit 690 V IEC 60947-1 Signalling circuit 600 V CSA Signalling circuit 600 V UL Power circuit 690 V IEC 60947-4-1
<b>Overvoltage category</b>	III
<b>Pollution degree</b>	3
<b>[U<sub>imp</sub>] rated impulse withstand voltage</b>	6 kV IEC 60947
<b>Safety reliability level</b>	B10d = 1369863 cycles contactor with nominal load EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load EN/ISO 13849-1
<b>Mechanical durability</b>	15 Mcycles
<b>Electrical durability</b>	1.65 Mcycles 32 A AC-3 <= 440 V 1.4 Mcycles 50 A AC-1 <= 440 V 1.65 Mcycles 32 A AC-3e <= 440 V
<b>Control circuit type</b>	AC 50/60 Hz standard
<b>Coil technology</b>	Without built-in suppressor module
<b>Control circuit voltage limits</b>	0.3...0.6 Uc (-40...158 °F (-40...70 °C)):drop-out AC 50/60 Hz 0.8...1.1 Uc (-40...140 °F (-40...60 °C)):operational AC 50 Hz 0.85...1.1 Uc (-40...140 °F (-40...60 °C)):operational AC 60 Hz 1...1.1 Uc (140...158 °F (60...70 °C)):operational AC 50/60 Hz
<b>Inrush power in VA</b>	70 VA 60 Hz cos phi 0.75 (at 68 °F (20 °C)) 70 VA 50 Hz cos phi 0.75 (at 68 °F (20 °C))
<b>Hold-in power consumption in VA</b>	7.5 VA 60 Hz cos phi 0.3 (at 68 °F (20 °C)) 7 VA 50 Hz cos phi 0.3 (at 68 °F (20 °C))
<b>Heat dissipation</b>	2...3 W at 50/60 Hz
<b>Operating time</b>	4...19 ms opening 12...22 ms closing
<b>Maximum operating rate</b>	3600 cyc/h at 60 °C

<b>Connections - terminals</b>	Control circuit: screw clamp terminals 2 0.002...0.004 in <sup>2</sup> (1...2.5 mm <sup>2</sup> ) - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 1 0.002...0.006 in <sup>2</sup> (1...4 mm <sup>2</sup> ) - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 2 0.002...0.006 in <sup>2</sup> (1...4 mm <sup>2</sup> ) - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 1 0.002...0.006 in <sup>2</sup> (1...4 mm <sup>2</sup> ) - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 1 0.002...0.006 in <sup>2</sup> (1...4 mm <sup>2</sup> ) - cable stiffness: solid without cable end Control circuit: screw clamp terminals 2 0.002...0.006 in <sup>2</sup> (1...4 mm <sup>2</sup> ) - cable stiffness: solid without cable end Power circuit: screw clamp terminals 1 0.004...0.02 in <sup>2</sup> (2.5...10 mm <sup>2</sup> ) - cable stiffness: flexible without cable end Power circuit: screw clamp terminals 2 0.004...0.02 in <sup>2</sup> (2.5...10 mm <sup>2</sup> ) - cable stiffness: flexible without cable end Power circuit: screw clamp terminals 1 0.002...0.02 in <sup>2</sup> (1...10 mm <sup>2</sup> ) - cable stiffness: flexible with cable end Power circuit: screw clamp terminals 2 0.002...0.009 in <sup>2</sup> (1.5...6 mm <sup>2</sup> ) - cable stiffness: flexible with cable end Power circuit: screw clamp terminals 1 0.002...0.02 in <sup>2</sup> (1.5...10 mm <sup>2</sup> ) - cable stiffness: solid without cable end Power circuit: screw clamp terminals 2 0.004...0.02 in <sup>2</sup> (2.5...10 mm <sup>2</sup> ) - cable stiffness: solid without cable end
<b>Tightening torque</b>	Control circuit 15.05 lbf.in (1.7 N.m) screw clamp terminals flat Ø 6 mm Control circuit 15.05 lbf.in (1.7 N.m) screw clamp terminals Philips No 2 Power circuit 22.1 lbf.in (2.5 N.m) screw clamp terminals flat Ø 6 mm Power circuit 22.1 lbf.in (2.5 N.m) screw clamp terminals Philips No 2 Control circuit 15.05 lbf.in (1.7 N.m) screw clamp terminals pozidriv No 2 Power circuit 22.1 lbf.in (2.5 N.m) screw clamp terminals pozidriv No 2
<b>Auxiliary contact composition</b>	1 NO + 1 NC
<b>Auxiliary contacts type</b>	Mechanically linked 1 NO + 1 NC IEC 60947-5-1 Mirror contact 1 NC IEC 60947-4-1
<b>Signalling circuit frequency</b>	25...400 Hz
<b>Minimum switching voltage</b>	17 V for signalling circuit
<b>Minimum switching current</b>	5 mA for signalling circuit
<b>Insulation resistance</b>	> 10 MOhm for signalling circuit
<b>Non-overlap time</b>	1.5 ms on de-energisation between NC and NO contact 1.5 ms on energisation between NC and NO contact
<b>Mounting Support</b>	Rail Plate

## Environment

<b>Standards</b>	CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 60947-4-1 IEC 60335-1:Clause 30.2 IEC 60335-2-40:Annex JJ UL 60335-2-40:Annex JJ CSA C22.2 No 60947-4-1
<b>Product Certifications</b>	UL CCC CSA Marine UKCA EAC CB Scheme
<b>IP degree of protection</b>	IP20 front face IEC 60529
<b>Protective treatment</b>	THIEC 60068-2-30
<b>Climatic withstand</b>	IACS E10 exposure to damp heat IEC 60947-1 Annex Q category D exposure to damp heat

Permissible ambient air temperature around the device	-40...140 °F (-40...60 °C) 140...158 °F (60...70 °C) with derating
Operating altitude	0...9842.52 ft (0...3000 m)
Fire resistance	1562 °F (850 °C) IEC 60695-2-1
Flame retardance	V1 conforming to UL 94
Mechanical robustness	Vibrations contactor open 2 Gn, 5...300 Hz) Vibrations contactor closed 4 Gn, 5...300 Hz) Shocks contactor closed 15 Gn for 11 ms) Shocks contactor open 8 Gn for 11 ms)
Height	3.3 in (85 mm)
Width	1.8 in (45 mm)
Depth	3.6 in (92 mm)
Net Weight	0.827 lb(US) (0.375 kg)

## Ordering and shipping details

Category	US10I1222354
Discount Schedule	0I12
GTIN	3389110351125
Returnability	Yes
Country of origin	ID

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.969 in (5.000 cm)
Package 1 Width	3.622 in (9.200 cm)
Package 1 Length	4.409 in (11.200 cm)
Package weight(Lbs)	14.638 oz (415.000 g)
Unit Type of Package 2	S02
Number of Units in Package 2	20
Package 2 Height	5.906 in (15.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	18.823 lb(US) (8.538 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	320
Package 3 Height	29.528 in (75.000 cm)
Package 3 Width	23.622 in (60.000 cm)
Package 3 Length	31.496 in (80.000 cm)
Package 3 Weight	320.676 lb(US) (145.456 kg)

## Contractual warranty

Warranty	18 months
----------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	147
--	-----

Environmental Disclosure	<a href="#">Product Environmental Profile</a>
--------------------------	---

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
--	-----

Packaging without single use plastic	Yes
--------------------------------------	-----

<a href="#">EU RoHS Directive</a>	Compliant
-----------------------------------	-----------

REACH Regulation	<a href="#">REACH Declaration</a>
------------------	-----------------------------------

California proposition 65	WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to <a href="#">www.P65Warnings.ca.gov</a>
---------------------------	---

PVC free	Yes
----------	-----

## Use Again

### Repack and remanufacture


Circularity Profile	<a href="#">End of Life Information</a>
---------------------	---

Take-back	No
-----------	----

WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
------------	--

## Dimensions Drawings

## Dimensions

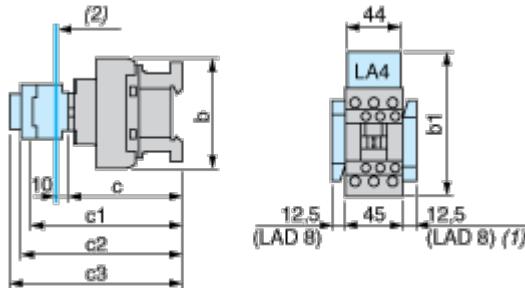

(1) Including LAD 4BB

(2) Minimum electrical clearance

LC1		D25...D38 (3-pole)
<b>b</b>	without add-on blocks	85
<b>b1</b>	with LAD 4BB	98
	with LA4 D●2	114 <sup>(1)</sup>
	with LA4 DF, DT	123 <sup>(1)</sup>
	with LA4 DW, DL	130 <sup>(1)</sup>
<b>c</b>	without cover or add-on blocks	90
	with cover, without add-on blocks	92
<b>c1</b>	with LAD N or C (2 or 4 contacts)	123
<b>c2</b>	with LA6 DK10, LAD 6K10	135
<b>c3</b>	with LAD T, R, S	143
	with LAD T, R, S and sealing cover	147
<b>(1)</b>	Including LAD 4BB.	

## Connections and Schema



Wiring

Image of product / Alternate images

Alternative

---



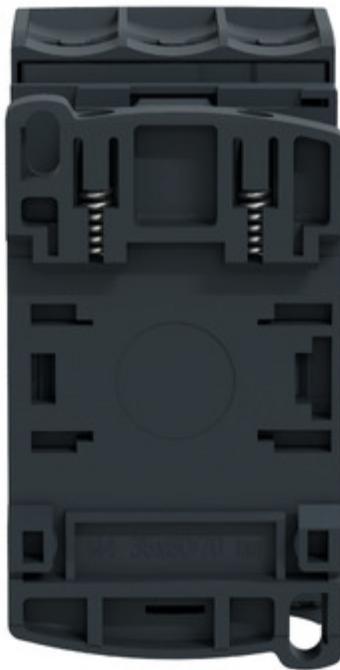

## Technical Illustration

## Assembly's dimensions

