


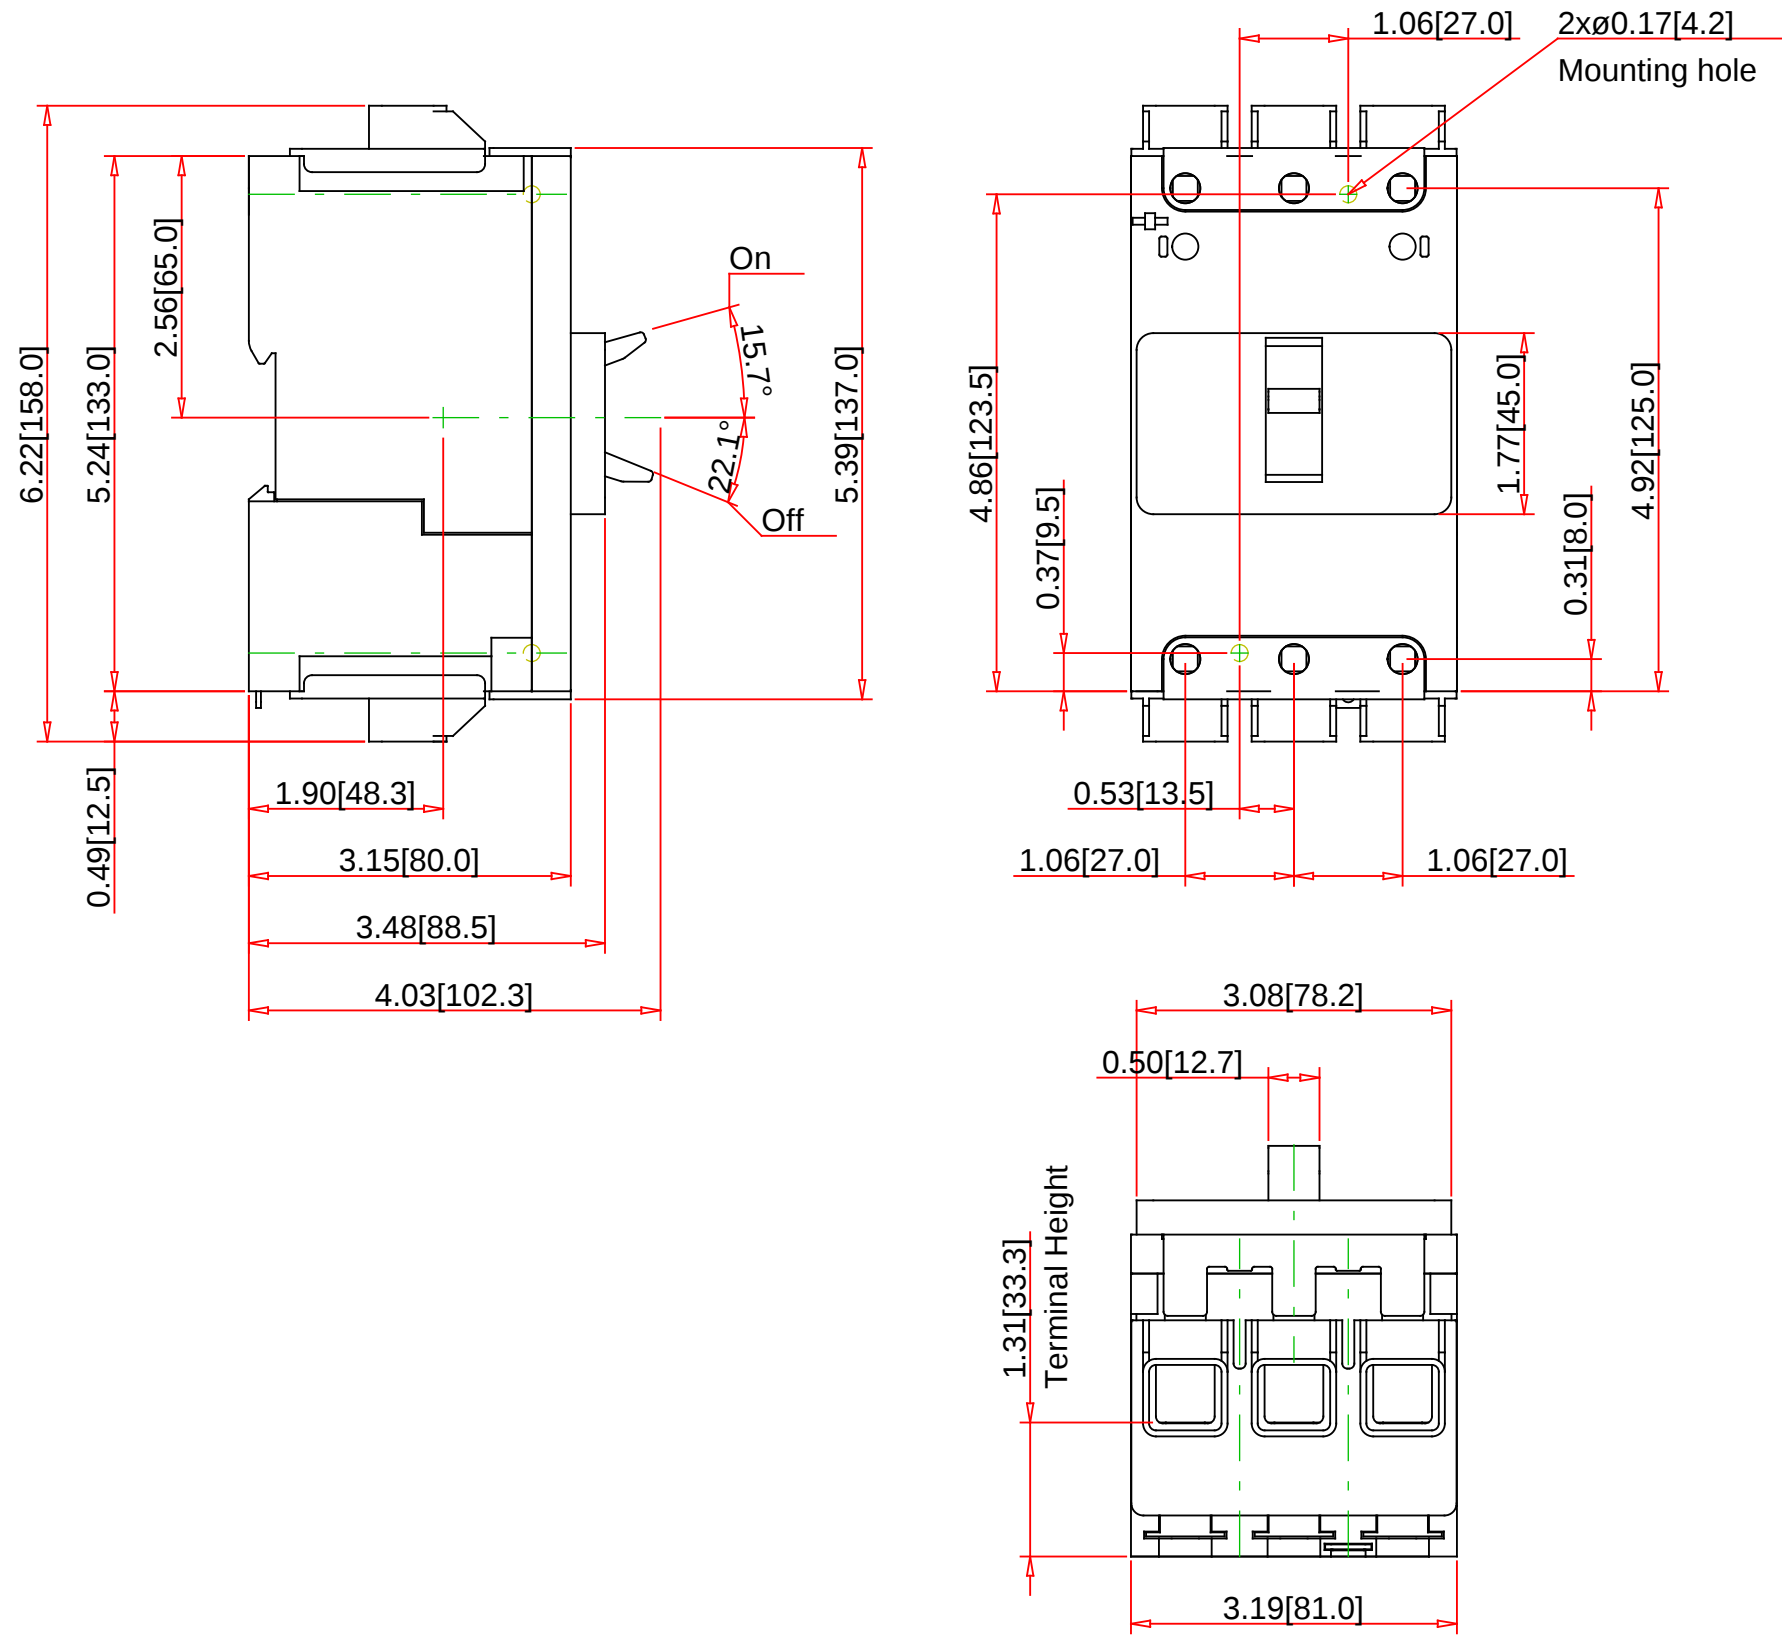

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
BDL36025

**SQUARE D**

by **Schneider Electric**

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 877 342 5173
Email: CCC@us.schneider-electric.com

Technical Information:		Specification:	
General Application:	Provides overload and short circuit protection	Description:	PowerPact B-Frame Thermal Magnetic Circuit Breaker
Approvals:	UL Listed - CSA Certified - IEC Rated	Number of Poles:	3-Pole
Mounting Type:	Unit Mount	Ampere Rating:	025
Terminal Type:	ON end: EverLink Lugs / OFF end: EverLink Lugs	Voltage Rating:	600Y VAC
Weight:	3	Interrupting Rating:	25kA at240VAC 18kA at480VAC 14kA at600Y/347VAC
Depth:	4.01	Circuit Breaker Rating:	80% Rated
Height:	6.22	Fixed AC Magnetic Trip:	Hold: 400A - Trip: 600A
Width:	6.22		
Mounting Height:			