


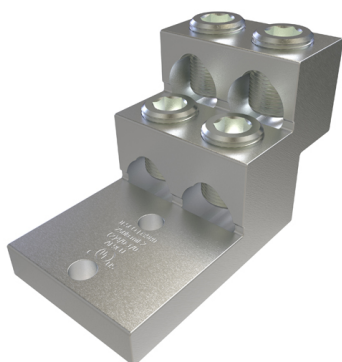

**SKU:** PBMW-4-750-38

**UPC:** 0783669184341

**Features & Benefits:**

**Description:** Aluminum Panelboard Lug, Multi Wire, Dual Rated, Conductor Range 750-2, 4 Ports, 2 Holes, 3/8in Bolt Size, 1-3/8in Hole Spacing, Tin Plated, UL, CSA

## Specs

### Additional Class Attributes

|                            |               |
|----------------------------|---------------|
| Connection                 | Mechanical    |
| Contains DE-OX®            | No            |
| Mounting Hole Type         | Thru          |
| Number of Conductors       | 4             |
| Number of Mounting Holes   | 2             |
| Number of Poles            | 1             |
| Number of Ports / Wireways | 4             |
| Wire Orientation           | Perpendicular |

### Dimensions

|                              |              |
|------------------------------|--------------|
| Dimension G (IN)             | 0.38         |
| Dimension G (mm)             | 9.652        |
| Drive Size Main              | 1/2          |
| Drive Type Main              | Internal Hex |
| Height (IN)                  | 2.96         |
| Height BX (IN)               | 3.125        |
| Height (mm)                  | 75.184       |
| Length (IN)                  | 4.91         |
| Length (mm)                  | 124.714      |
| Mounting Bolt/Stud Size (mm) | 965.2        |
| Mounting Hole Diameter (IN)  | 0.406        |
| Mounting Hole Diameter (mm)  | 10.3124      |
| Mounting Hole Spacing (IN)   | 1.38         |
| Mounting Hole Spacing (mm)   | 35.052       |
| Tang Length (IN)             | 2.35         |
| Tang Length (mm)             | 59.69        |
| Tang Thickness (IN)          | 0.625        |
| Tang Thickness (mm)          | 15.875       |
| Tang Width (IN)              | 2.62         |
| Tang Width (mm)              | 66.548       |
| Weight (LB)                  | 1.166        |
| Weight BX (LB)               | 1.2994       |
| Width (IN)                   | 2.62         |
| Width BX (IN)                | 3.875        |
| Width (mm)                   | 66.548       |

### Material and Finish

|                                |          |
|--------------------------------|----------|
| Conductor Material             | Copper   |
| Connector Finish               | Tin      |
| Insulation                     | NA       |
| Material                       | Aluminum |
| Wire Binding Hardware Finish   | Tin      |
| Wire Binding Hardware Material | Aluminum |

### Additional Technical Specifications

|                |          |
|----------------|----------|
| Conductor Type | Stranded |
|----------------|----------|

### Bolt and Screw Sizes

|                                        |       |
|----------------------------------------|-------|
| Mounting Bolt/Stud Size                | 3/8   |
| Number of Wire Binding Screws per Port | 1     |
| Wire Binding Screw Size                | 15/16 |
| Wire Binding Torque                    | 500   |

### General

|                             |                 |
|-----------------------------|-----------------|
| Bag Quantity                | 1               |
| Carton Quantity Description | STD PACK QTY 10 |
| Direct Burial               | No              |
| Dual Rated                  | Yes             |
| NEMA Code                   | S-588-3         |
| UPC Code                    | 78366918434     |

### Testing Standards

|                          |                                                                                                                     |
|--------------------------|---------------------------------------------------------------------------------------------------------------------|
| CSA File Number          | NA                                                                                                                  |
| Prop65 Compliance        | This product is in compliance with Prop65. It is not known to contain any chemicals associated with this regulation |
| UL / CULUS Specification | UL/cUL 486A/B Listed                                                                                                |
| UL File Number           | E6207                                                                                                               |

### Environment and Temperature

|                    |      |
|--------------------|------|
| Temperature Rating | 90°C |
|--------------------|------|

### Color

|       |        |
|-------|--------|
| Color | Silver |
|-------|--------|

### Conductor Ranges

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Conductor Range AL Solid (Secondary, tap, load)        | NA                    |
| Conductor Range AL Stranded (Primary, run, main, line) | 750 kcmil - 2 Str     |
| Conductor Range AL Stranded (Secondary, tap, load)     | NA                    |
| Conductor Range CU Solid (Primary, run, main, line)    | NA                    |
| Conductor Range CU Solid (Secondary, tap, load)        | NA                    |
| Conductor Range CU Stranded (Primary, run, main, line) | 750 kcmil - 2 Str     |
| Conductor Range CU Stranded (Secondary, tap, load)     | NA                    |
| Conductor Range AL Solid (Primary, run, main, line)    | NA                    |
| Wire Combinations                                      | (2) 4/0 Str - 1/0 Str |

## Voltage

Voltage Rating

35 kV