


# Product data sheet

## Characteristics

# ACF53EC

End Closure, I-Line Busway, max 1000A rated, end caps

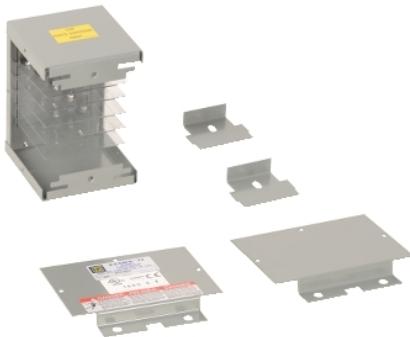

### Main

Product	End Closure
Range	I-Line

### Complementary

Rated Operational Voltage	600 V AC/DC 50/60 Hz
Length	5.84 in (148.34 mm)
Height	7.06 in (179.32 mm)
Width	1 in (25.40 mm)
For Use with	Busbar trunking 1000 A aluminium end caps Busbar trunking 1200 A copper end caps

### Environment

Standards	UL 857 CSA C22.2 No 27:1994 IEC 61439-6
-----------	---

### Ordering and shipping details

Category	20199-WALL FLANGES/END CLOSURES
Discount Schedule	PE8
GTIN	785901816119
Returnability	Yes
Country of origin	US

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.50 in (13.97 cm)
Package 1 Width	8.80 in (22.352 cm)
Package 1 Length	9.00 in (22.86 cm)
Package 1 Weight	4.90 lb(US) (2.223 kg)

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	 <a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
RoHS exemption information	 Yes
Environmental Disclosure	 <a href="#">Product Environmental Profile</a>
PVC free	Yes

## Contractual warranty

Warranty	18 months
----------	-----------