

30mm Command/52, Chrome Finish Heavy Duty, Watertight/Oiltight Complete Metal Unit Push-Pull Operator Non-Illuminated Mushroom Head Cap Small 1.73" (44 mm) Metal, Chrome 2 Position Maintained, Pull-to-Release with 1 N.O. - 1 N.C. Heavy Duty Contacts, A600/P600 UL Listed, CSA Certified NEMA 1,3,3R,4,4X,12,13 & Automotive Standards

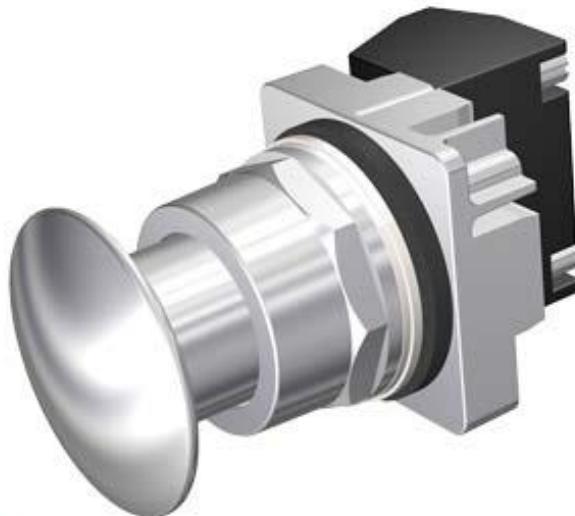


Figure similar

Enclosure	
Number of command points	1
Delivery state	
• as a kit	No
Actuator	
Material of the actuating element	metal
Number of contact modules	1
Type of unlocking device	pull-to-unlatch mechanism
Number of switching positions	2
Front ring	
Product component front ring	Yes
Design of the front ring	standard
Material of the front ring	metal
General technical data	
Product function	
• positive opening	Yes

<b>Product component</b>	
• Light source	No
<b>Insulation voltage</b>	
• rated value	600 V
<b>Surge voltage resistance rated value</b>	4 kV
<b>Protection class IP</b>	IP66
• of the terminal	IP20
<b>Thermal current</b>	10 A

<b>Auxiliary circuit</b>	
<b>Number of NC contacts for auxiliary contacts</b>	1
<b>Number of NO contacts for auxiliary contacts</b>	1
<b>Operating current at AC-15</b>	
• at 110 V rated value	60 A
• at 230 V rated value	30 A
• at 400 V rated value	15 A
• at 500 V rated value	12 A

<b>Connections/ Terminals</b>	
<b>Type of electrical connection</b>	screw-type terminals
<b>Tightening torque of the screws in the bracket</b>	20 N·m
<b>Tightening torque [lbf·in]</b>	
• with screw-type terminals	8 lbf·in

<b>Ambient conditions</b>	
<b>Ambient temperature</b>	
• during operation	-35 ... +70 °C
• during storage	-40 ... +85 °C

<b>Installation/ mounting/ dimensions</b>	
<b>Shape of the installation opening</b>	round

<b>Certificates/ approvals</b>	

<b>Further information</b>	
<b>Information- and Downloadcenter (Catalogs, Brochures,...)</b>	<a href="https://www.siemens.com/ic10">https://www.siemens.com/ic10</a>
<b>Industry Mall (Online ordering system)</b>	<a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=US2:52PP2ACA">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=US2:52PP2ACA</a>
<b>Cax online generator</b>	<a href="http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=US2:52PP2ACA">http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=US2:52PP2ACA</a>
<b>Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)</b>	<a href="https://support.industry.siemens.com/cs/ww/en/ps/US2:52PP2ACA">https://support.industry.siemens.com/cs/ww/en/ps/US2:52PP2ACA</a>
<b>Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)</b>	<a href="http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:52PP2ACA&amp;lang=en">http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:52PP2ACA&amp;lang=en</a>

last modified: 02/14/2020