

# Product data sheet

Specifications

SQUARE D



Safety switch, heavy duty, fusible, 1200A, 4 wire, 3 pole, 1 neutral, 500hp, 600VAC/DC, NEMA 3R

H368NR

Product availability: Stock - Normally stocked in distribution facility

## Main

|                             |                                                                                                                                                                                                                           |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product                     | Single Throw Safety Switch                                                                                                                                                                                                |
| Duty Rating                 | Heavy duty                                                                                                                                                                                                                |
| Device Application          | Heavy application                                                                                                                                                                                                         |
| Disconnect Type             | Fusible disconnect                                                                                                                                                                                                        |
| Factory Installed Neutral   | Neutral (factory installed)                                                                                                                                                                                               |
| Number of Poles             | 3                                                                                                                                                                                                                         |
| Current Rating              | 1200 A                                                                                                                                                                                                                    |
| Voltage Rating              | 600 V AC/DC                                                                                                                                                                                                               |
| Enclosure Rating            | NEMA 3R galvanized steel                                                                                                                                                                                                  |
| Standard Motor Power Rating | 200 hp at 480 V AC 50-60 Hz for 3 phase motors<br>500 hp at 480 V AC 50-60 Hz for 3 phase motors<br>250 hp at 600 V AC 50-60 Hz for 3 phase motors<br>500 hp at 600 V AC 50-60 Hz for 3 phase motors<br>50 hp at 600 V DC |

## Complementary

|                       |                                                                              |
|-----------------------|------------------------------------------------------------------------------|
| Short-circuit current | 200 kA maximum for L                                                         |
| Fuse type             | L                                                                            |
| Mounting Type         | Surface                                                                      |
| Electrical Connection | Lugs                                                                         |
| Wiring configuration  | 4-wire (3PH + N)                                                             |
| Wire Size             | AWG 3/0...750 kcmil copper or aluminium                                      |
| Tightening torque     | 375 lbf.in (42.4 N.m) 0.13...0.6 in² (85.01...380 mm²) (AWG 3/0...750 kcmil) |
| Depth                 | 17.75 in (450.85 mm)                                                         |
| Width                 | 36.62 in (930.15 mm)                                                         |
| Height                | 69.13 in (1755.90 mm)                                                        |
| Product Weight        | 382.06 lb(US) (173.3 kg)                                                     |

## Environment

|                |                      |
|----------------|----------------------|
| Certifications | UL listed file E2875 |
|----------------|----------------------|

## Ordering and shipping details

|                   |              |
|-------------------|--------------|
| Category          | US10DE100054 |
| Discount Schedule | 0DE1         |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                   |              |
|-------------------|--------------|
| GTIN              | 785901442479 |
| Returnability     | Yes          |
| Country of origin | MX           |

Packing Units

|                        |                             |
|------------------------|-----------------------------|
| Unit Type of Package 1 | PCE                         |
| Nbr. of units in pkg.  | 1                           |
| Package 1 Height       | 74.000 in (187.960 cm)      |
| Package 1 Width        | 30.000 in (76.200 cm)       |
| Package 1 Length       | 37.800 in (96.012 cm)       |
| Package weight(Lbs)    | 382.000 lb(US) (173.272 kg) |

Contractual warranty

|                      |    |
|----------------------|----|
| Warranty (in months) | 18 |
|----------------------|----|



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

|                                                        |                                               |
|--------------------------------------------------------|-----------------------------------------------|
| Total lifecycle Carbon footprint                       | 2 467 kg CO2 eq.                              |
| Carbon footprint of the manufacturing phase [A1 to A3] | 4 kg CO2 eq.                                  |
| Carbon footprint of the distribution phase [A4]        | 0.8 kg CO2 eq.                                |
| Carbon footprint of the installation phase [A5]        | 0.1 kg CO2 eq.                                |
| Carbon footprint of the use phase [B2, B3, B4, B6]     | 2 462 kg CO2 eq.                              |
| Carbon footprint of the end-of-life phase [C1 to C4]   | 1 kg CO2 eq.                                  |
| Environmental Disclosure                               | <a href="#">Product Environmental Profile</a> |

## Use Better



### Materials and Substances

|                                        |                                                                                                                                                                                                                                                                                             |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Packaging made with recycled cardboard | Yes                                                                                                                                                                                                                                                                                         |
| Packaging without single use plastic   | Yes                                                                                                                                                                                                                                                                                         |
| SCIP Number                            | 3ccc1618-a689-404e-9255-a0e6b213d760                                                                                                                                                                                                                                                        |
| EU RoHS Directive                      | <a href="#">Compliant By Exemption</a>                                                                                                                                                                                                                                                      |
| REACH Regulation                       | <a href="#">Reference contains Substances of Very High Concern above the threshold</a>                                                                                                                                                                                                      |
| California proposition 65              | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| Halogen content performance            | Halogen free plastic parts product                                                                                                                                                                                                                                                          |
| PVC free                               | Yes                                                                                                                                                                                                                                                                                         |

## Use Longer



### Lifetime extension

|        |    |
|--------|----|
| Repair | No |
|--------|----|

## Use Again




### Repack and remanufacture

|                               |                                          |
|-------------------------------|------------------------------------------|
| Recyclability potential, in % | 93                                       |
| Circularity Profile           | No need of specific recycling operations |
| Take-back                     | No                                       |

Dimensions Drawings


Approximate Dimensions

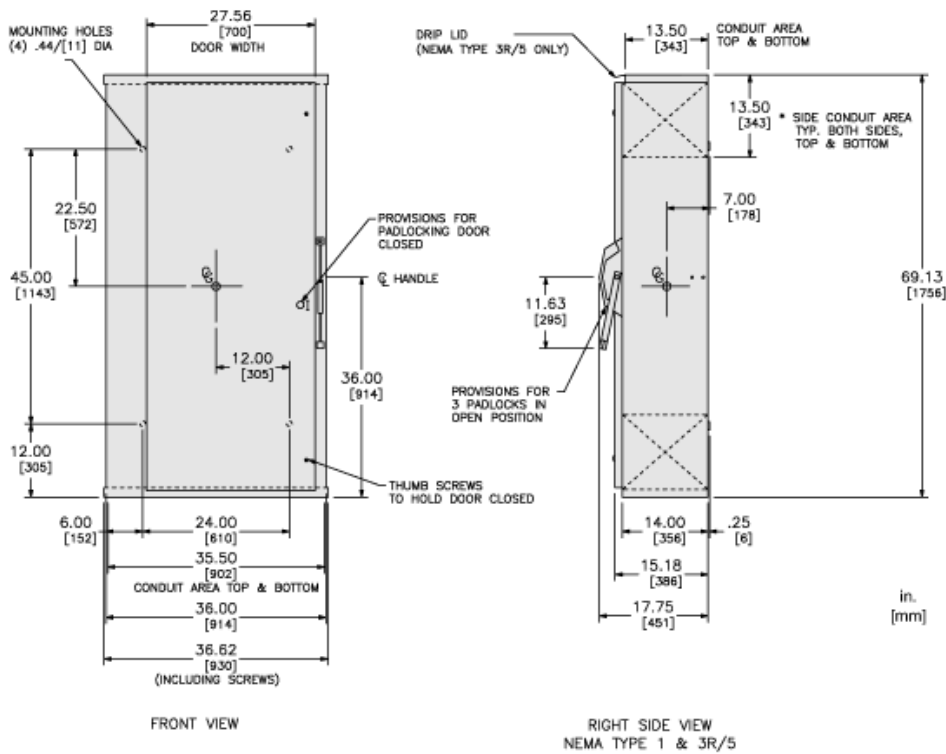

| CATALOG NUMBER | VOLTAGE RATINGS | WIRING DIAG. | 3 PHASE HORSEPOWER RATINGS |      |        |      |        |      | DC HORSEPOWER RATINGS |      |        |      |
|----------------|-----------------|--------------|----------------------------|------|--------|------|--------|------|-----------------------|------|--------|------|
|                |                 |              | 240VAC                     |      | 480VAC |      | 600VAC |      | 250VDC                |      | 600VDC |      |
|                |                 |              | STD                        | MAX. | STD    | MAX. | STD    | MAX. | STD                   | MAX. | STD    | MAX. |
| H32B           | 240VAC;250VDC   | A            | 100                        | 250  | —      | —    | —      | —    | 50                    | 50   | —      | —    |
| H32BR          | 240VAC;250VDC   | A            | 100                        | 250  | —      | —    | —      | —    | 50                    | 50   | —      | —    |
| H32BN          | 240VAC;250VDC   | B            | 100                        | 250  | —      | —    | —      | —    | 50                    | 50   | —      | —    |
| H32BNR         | 240VAC;250VDC   | B            | 100                        | 250  | —      | —    | —      | —    | 50                    | 50   | —      | —    |
| H36B           | 600VAC;600VDC   | A            | 100                        | 250  | 200    | 500  | 250    | 500  | —                     | —    | 50     | 50   |
| H36BR          | 600VAC;600VDC   | A            | 100                        | 250  | 200    | 500  | 250    | 500  | —                     | —    | 50     | 50   |
| H36BN          | 600VAC;600VDC   | B            | 100                        | 250  | 200    | 500  | 250    | 500  | —                     | —    | 50     | 50   |
| H36BNR         | 600VAC;600VDC   | B            | 100                        | 250  | 200    | 500  | 250    | 500  | —                     | —    | 50     | 50   |
| HU36B          | 600VAC;600VDC   | C            | 100                        | 100  | —      | 500  | —      | 500  | —                     | —    | 50     | 50   |
| HU36BR         | 600VAC;600VDC   | C            | 100                        | 100  | —      | 500  | —      | 500  | —                     | —    | 50     | 50   |

Connections and Schema

Wiring Diagrams

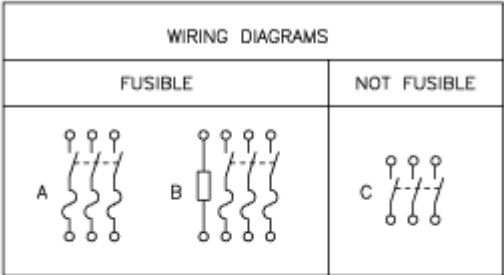


| TERMINAL LUGS |              |             |               |
|---------------|--------------|-------------|---------------|
| AMPERES       | MAX. WIRE    | MIN. WIRE   | TYPE          |
| 1200          | (4)750 KCMIL | (4)#3/0 AWG | 75°C AL OR CU |

| FUSE PROVISIONS |           |         |           |
|-----------------|-----------|---------|-----------|
| AMPERES         | TYPE      | AMPERES | TYPE      |
| 1200            | CLASS "L" | 800     | CLASS "L" |

Technical Illustration


Dimensions

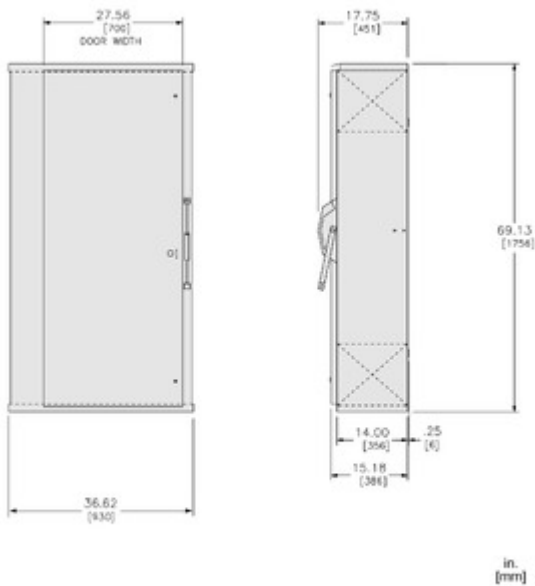

ALL DIMENSIONS ARE APPROXIMATE.  
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

Technical Illustration

Wiring diagram

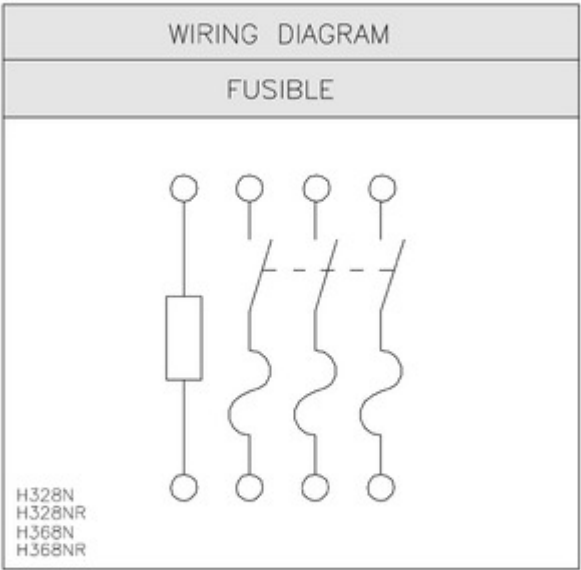

REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.