

Combination Couplings

Compression Type EMT to Rigid

Features

- Internally threaded for Rigid/IMC conduit
- Compression type EMT
- Raintight

Applications

- Suitable for indoor and outdoor use
- Use to join Rigid/IMC conduit to EMT between 2 different raceways
- Coupling internally threaded for Rigid/IMC
- Compression type for EMT, concrete tight

Standard Material


- Steel

Standard Finish

- Zinc plated



UL standard 514B NEMA FB 1
Federal Spec A-A-50553

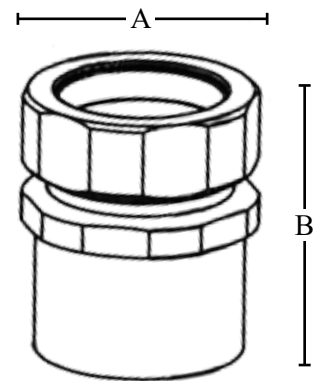

Catalog Number	UPC	Size	Unit Carton	Ship Case	Weight/Case	Inches	
						A	B
391C	87320	1/2"	20	200	31	1.10	1.57
392C	87321	3/4"	10	100	21	1.33	1.62
393C	87322	1"	10	100	30	1.63	1.82