

Straight Blade Devices
20 Amp, 125 Volt, 2-Pole, 3-Wire
SNAPConnect® Hospital Grade Receptacle

HUBBELL

Features

- Audible SNAP, indicates solid connection
- Reduces installation time
- Tamper-Resistant, Split Circuit
- Assembled in USA

Ordering Information

Description
Hospital Grade,
Tamper-Resistant, Split Circuit


Device Color UPC Number
Gray 783585552330

Catalog Number
SNAP2182GYSCTR
A



Listings

UL Listed to UL498 File No. E2330
Certified to CSA, C22.2, No. 42 File 429
Fed. Spec. W-C-740
NEMA® WD-6 Compliant

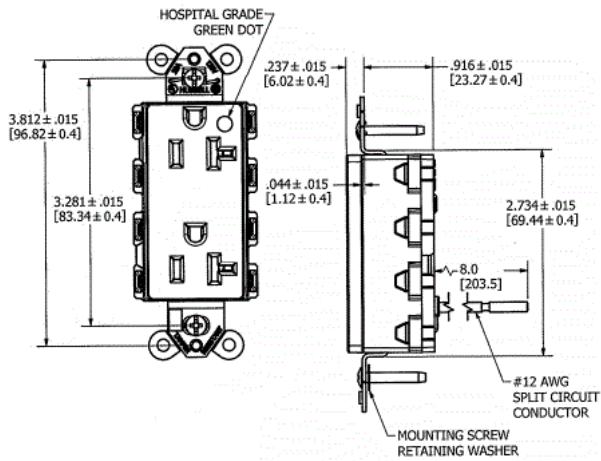

Specifications

Face	Nylon
Base	Nylon
Line Contact	Brass
Ground Contact	Brass

Performance

Electrical
Current Interrupting Certified for current interrupting at full rated current
Dielectric Voltage Withstands 2,000V minimum

Mechanical
Product Identification Ratings are a permanent part of the device

Environmental
Flammability UL 94V-2
Operating Temperature Maximum continuous 75°C; minimum -40°C (without impact)

Complementary Products

Wallplate or Weatherproof Cover
Opening

Online Resources

Customer Sales Drawing
eCatalog
Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.