



PAR16 floodlight with die cast aluminum housing, integral glare shield and tempered lens. Sleek good looks with minimal size. Supplied with 6" leads and ground wire. Medium base PAR16 lamp, 60 Watt max. Lamp not supplied.

Color: Black

Weight: 0.8 lbs

Project:

Type:

Prepared By:

Date:

#### Lamp Info

Type PAR16  
Watts 60W  
Shape/Size N/A  
Base N/A  
ANSI N/A  
Hours 2,000  
Lamp Lumens 650 lm  
Efficacy N/A

#### Ballast Info

Type N/A  
120V N/A  
208V N/A  
240V N/A  
277V N/A  
Input Watts N/A

## Technical Specifications

### Compliance

#### UL Listed:

Suitable for wet locations. Suitable for mounting within 4ft (1.2m) of the ground.

### Construction

#### Swivels:

1/2" NPS threaded arm with serrated locking swivel fits all standard mounting boxes. EZ Grip locknuts color matched to fixture.

#### Housings:

Precision die-cast aluminum

#### Compatibility:

Fixture is compatible with GE and Sylvania Par16 lamps. Not compatible with Philips Par16 lamp.

### Other

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

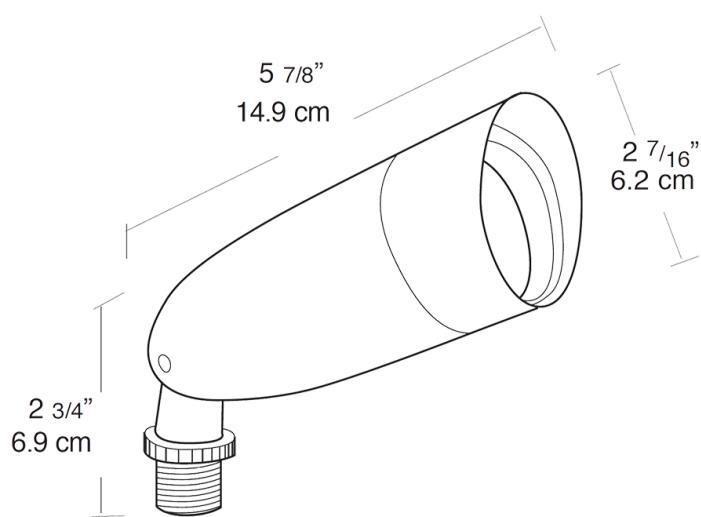
### Electrical

#### Voltage:

120V

#### Sockets:

Medium base porcelain with all copper current carrying components and spring loaded center contact

**Dimensions****Features**

Rugged die cast aluminum housing with polyester powder coat finish  
Deep Glare Shield  
weatherproof lens and gasket  
"O" Ring seal for full weather protection  
No-rust brass & stainless steel external hardware  
Rugged mounting arm has 1/2" threads and pivots 180  
EZ Grip locknuts are color matched to fixture and can be tightened with fingers, pliers or screwdriver