


Copper Long Barrel 1 Hole Compression Lugs



- ▶ High Conductivity Seamless Copper
- ▶ Electro-Tin Plating Resists Corrosion, reduces contact resistance for Maximum Conductivity
- ▶ Single Mounting Hole
- ▶ Long Barrel Accommodates Multiple Crimps
- ▶ Color Coded Die Index and Crimp Marks Printed on Barrel
- ▶ UL 486A Listed for Applications Thru 35KV

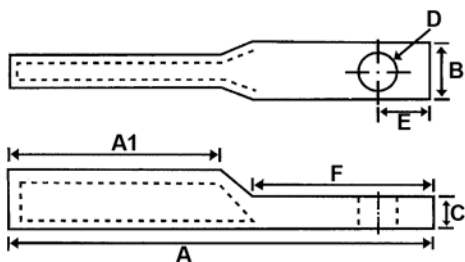

Dimensions = Inches

Cat. No.	Wire Range	Stud Size	Color Code	ID	OD	A	A1	B	C	D	E	F	Box Qty
94210	8 Str.	#10	Red	.173	.271	1.51	.80	.42	.08	.21	.28	.59	50
94211	8 Str.	1/4	Red	.173	.271	1.52	.81	.42	.08	.25	.28	.59	50
94213	6 Str.	#10	Blue	.204(5.2)	.295	1.77	.98	.42	.08	.21	.30	.64	40
94214	6 Str.	1/4	Blue	.204(5.2)	.295	1.77	.98	.42	.08	.25	.30	.67	40
94215	6 Str.	5/16	Blue	.204(5.2)	.295	1.91	.98	.59	.08	.33	.37	.81	40
94216	6 Str.	3/8	Blue	.204(5.2)	.295	1.91	.98	.59	.08	.41	.37	.81	40
94217	4 Str.	#10	Gray	.251(6.4)	.342	1.77	.98	.49	.09	.25	.31	.67	30
94218	4 Str.	1/4	Gray	.251(6.4)	.342	1.77	.98	.49	.09	.25	.29	.65	30
94219	4 Str.	5/16	Gray	.251(6.4)	.342	1.77	.98	.49	.09	.33	.31	.67	30
94220	4 Str.	3/8	Gray	.251(6.4)	.342	1.91	.98	.59	.09	.41	.37	.81	30
94221	2 Str.	1/4	Brown	.314(8.0)	.421	2.07	1.10	.60	.10	.25	.37	.81	15
94222	2 Str.	5/16	Brown	.314(8.0)	.421	2.07	1.10	.60	.10	.33	.37	.81	15
94223	2 Str.	3/8	Brown	.314(8.0)	.421	2.07	1.10	.60	.10	.41	.37	.81	15
94226	1 Str.	5/16	Green	.358(9.1)	.468	2.11	1.10	.67	.11	.33	.37	.81	15
94227	1 Str.	3/8	Green	.358(9.1)	.468	2.21	1.10	.67	.11	.41	.37	.81	15
94230	1/0 Str.	5/16	Pink	.389(9.9)	.519	2.21	1.20	.74	.13	.33	.37	1.06	10
94234	1/0 Str.	3/8	Pink	.389(9.9)	.519	2.20	1.20	.74	.13	.41	.41	1.06	10
94235	1/0 Str.	1/2	Pink	.389(9.9)	.519	2.50	1.20	.74	.13	.51	.47	1.06	10
94238	2/0 Str.	3/8	Black	.440	.562	2.68	1.38	.81	.12	.41	.47	1.06	10
94239	2/0 Str.	1/2	Black	.440	.562	2.68	1.38	.81	.12	.51	.47	1.06	10
94245	3/0 Str.	3/8	Orange	.492	.622	2.80	1.38	.90	.13	.41	.47	1.06	20
94246	3/0 Str.	1/2	Orange	.492	.622	2.80	1.38	.90	.13	.51	.47	1.06	20
94253	4/0 Str.	3/8	Purple	.547	.688	2.80	1.38	.90	.13	.41	.47	1.06	15
94254	4/0 Str.	1/2	Purple	.547	.688	3.23	1.62	1.00	.13	.51	.52	1.06	15
94257	250 MCM	3/8	Yellow	.594	.751	3.03	1.61	1.09	.15	.41	.52	1.06	10
94258	250 MCM	1/2	Yellow	.594	.751	3.03	1.61	1.09	.15	.51	.52	1.06	10
94262	300 MCM	1/2	White	.657	.814	3.39	1.97	1.19	.15	.51	.52	1.06	10
94266	350 MCM	1/2	Red	.700	.874	3.46	1.97	1.28	.17	.51	.52	1.06	8
94267	350 MCM	5/8	Red	.700	.874	3.46	1.97	1.28	.17	.67	.51	1.06	8
94270	400 MCM	1/2	Blue	.763	.948	3.86	1.97	1.39	.18	.51	.51	1.38	6
94274	400 MCM	5/8	Blue	.763	.948	3.86	1.97	1.39	.18	.51	.51	1.38	6
94278	500 MCM	1/2	Brown	.834	1.06	4.13	2.24	1.54	.22	.51	.51	1.38	8
94282	500 MCM	5/8	Brown	.834	1.06	4.13	2.24	1.54	.22	.51	.51	1.38	8
94286	600 MCM	5/8	Green	.925	1.18	4.25	2.24	1.72	.25	.67	.69	1.46	6
94290	750 MCM	5/8	Black	1.03	1.31	5.16	2.64	1.90	.27	.67	.69	1.85	4
94292	1000 MCM	5/8	White	1.15	1.50	5.625	2.87	2.15	.33	.67	.86	1.74	3