
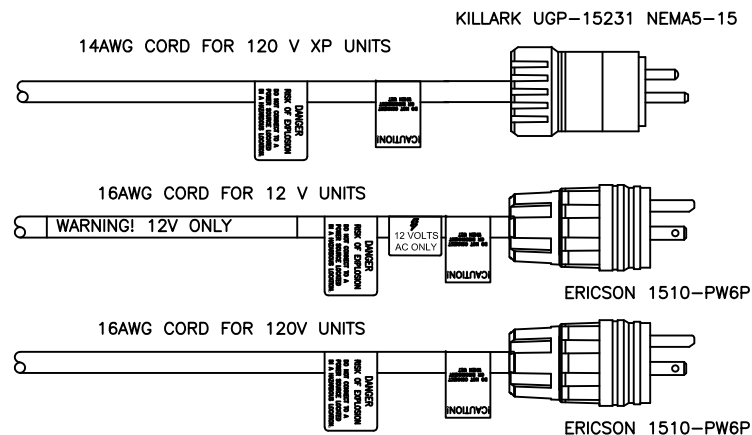


8
7
6
5
4
3
2
1
RESTRICTED

THIS PRINT IS PROPRIETARY AND CONFIDENTIAL AND MUST NOT BE COPIED OR ITS CONTENTS REVEALED TO UNAUTHORIZED PERSONNEL WITHOUT WRITTEN CONSENT OF ERICSON MANUFACTURING CO. IT IS TO BE RETURNED TO ERICSON MFG. UPON REQUEST.

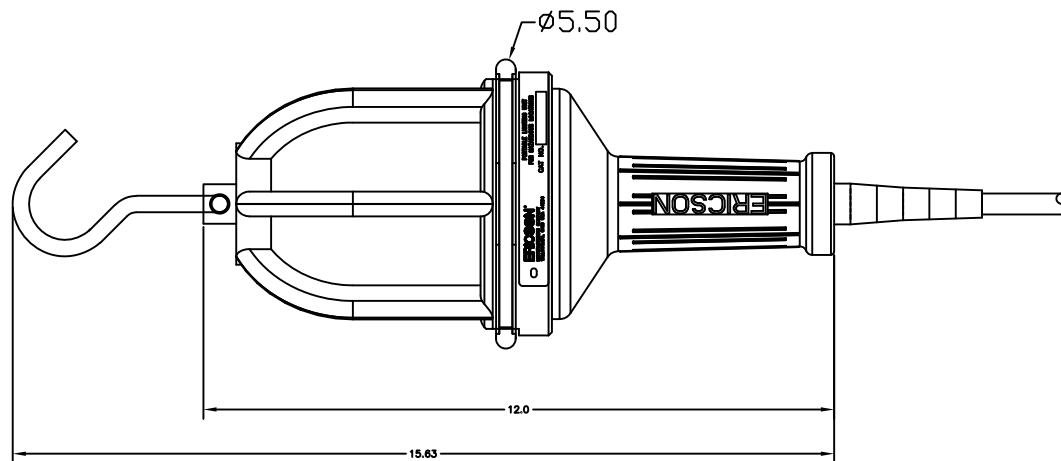

NOTES:

1. MAX OPERATING AMBIENT 40°C
2. MAXIMUM VOLTAGE 125V
3. CLASS I, GROUPS C&D 100W MAX ETL & cETL LISTED EXCEPT AS NOTED, T3C
4. CLASS II, GROUPS F&G 60W MAX ETL & cETL LISTED EXCEPT AS NOTED, T4
5. SIMULTANEOUS CLASS I, C&D AND CLASS II, F&G @ 60W MAX
6. WEIGHT APPROX. 5.0#
7. CORD RANGE 16/3 - 14/3 S, SO, ST, STO
8. NO CORD, OR 25FT OR 50FT OR 100FT SOOW STANDARD.
9. APPROVED FOR USE IN WET LOCATIONS.
10. ENVIRONMENTAL RATING NEMA 4.

L	REPLACED C8020014 w/ L2010W	10/23/16	RWH		4448
K	RESTORED P/N'S W/ 1510-PW6P & 16AWG FOR STD VERS	9/14/16	RWH		4177
J	ADDED-XP P/N'S W/ XP PLUG, RESTORED 1510-PW6P TO STD VERS	6/17/16	RWH		4139
H	CHANGED FROM 1510-PW6P TO XP PLUG	4/15/15	JRA		3895
REV	REVISION DESCRIPTION	DATE	BY	CHKD	ECN NO.
A	INITIAL RELEASE				
B	REVISE GUARD ASSEM	7/30/08	RWH		2544
C	ADD SILICONE GREASE	11/17/08	RWH		2601
D	ADD C8020575, REORDER LABEL	5/22/09	D.A.N.	JRA	2703
E	ADD C8055045	6/10/09	D.A.N.	JRA	2721
F	ADDED 2650XP	5/13/11	MST	JRA	3129
G	CHANGED FROM MLD PLUG TO MECH	4/29/14	SAH	JRA	3696

TOLERANCES
FRAC. $\pm 1/64$
.X $\pm .015$
.XX $\pm .010$
.XXX $\pm .005$
ANGLES $\pm 1^\circ$
UNLESS OTHERWISE
SPECIFIED
DO NOT SCALE
B SIZE

DWG. APPROVALS DATE REV.

DRAWN RWH 4/3/07
CHK'D _____



ERICSON
SAFETY IS OUR STANDARD

ERICSON MANUFACTURING COMPANY
1-800-ERICSON • www.ericson.com

DWG. TITLE		
ASSEMBLY 2600 XP HANDLAMP		
SCALE NTS	PROJ NO. --/--	SHEET 1 OF 3
DWG. UNIT NO. 2600 FAMILY		REV L