



M-6060 5

CABLE
 ϕ 500
 [12.7] MIN.
 ϕ 1.450
 [36.80] MAX.

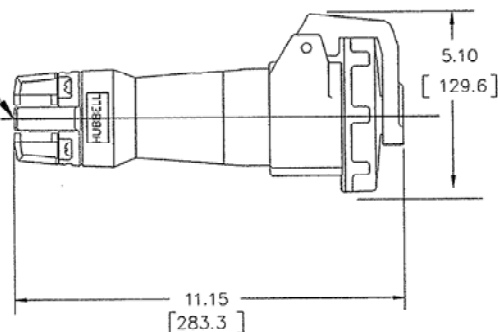

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	SEE TABLE	
INTERIOR	THERMOSET	
SLEEVES	BRASS	
INSERT SPRINGS	BERR COPPER	SILVER
TERM. SCRS.	STAIN. STEEL	
COVER	POLYESTER	
COV. SCR.	BRASS	NICKEL
COV. SPR.	STAIN. STEEL	
GASKET	NEOPRENE	
DISC	POLYCARBONATE	
ARM	POLYESTER	
HINGE PIN	STAIN. STEEL	
HINGE SPR.	STAIN. STEEL	
GLAND CAP	POLYESTER	
GLANDS	NEOPRENE	
CLAMPS	POLYESTER	
CLAMP NUTS	BRASS	NICKEL
ASS'Y SCRS	STAIN. STEEL	

CAT NO.	CONFIGURATION	RATING	HOUSING		CAT. NO.	CONFIGURATION	RATING	HOUSING	
			MATERIAL	COLOR				MATERIAL	COLOR
					HBL360C7W		60 A 480 VAC	NYLON	RED
					HBL360C8V0DC		60 A 550 VDC	PBT	BLACK
HBL360C3W		60 AMP 250 VDC	NYLON	BLUE					
HBL360C4W		60 A 125 VAC	NYLON	YELLOW					
HBL360C6W		60 A 250 VAC	NYLON	BLUE					
HBL363C6W		63 A 220-240 VAC							

NOTES: (UNLESS OTHERWISE SPECIFIED)

1) TOLERANCES ARE:
 DECIMALS $\pm .03$
 ANGLES $\pm 2^\circ$

2) DIMENSIONS ARE INCHES
 [MILLIMETERS]

CODE 74545

SYM REVISIONS APP DATE

THE DESIGN AND DIMENSIONS OF THE
 PRODUCT SHOWN ON THIS DRAWING ARE
 SUBJECT TO CHANGE WITHOUT NOTICE

TITLE 60A & 63A 2 POLE 3 WIRE
 PIN AND SLEEVE
 CONNECTOR

TOLERANCES UNLESS
 OTHERWISE SPECIFIED
 FRACTIONS $\pm 1/64$
 DECIMALS $\pm .005$
 ANGLES $\pm 2^\circ$

WIRING DEVICE-KELLEMS
 HUBBELL INCORPORATED
 BRIDGEPORT, CT

DR. BY MJK APP. BY DJP
 TR. BY JMN SCALE NONE
 CHK'D BY DJP DATE 6/13/06

DIMENSION SHEET FOR CAT. NO.

SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☐

B

M-6060

5