

Straight Blade Devices

20 Amp, 125 Volt, 2-Pole, 3-Wire

SNAPConnect<sup>®</sup> Hospital Grade Receptacle



Features

- Audible SNAP, indicates solid connection
- Reduces installation time
- Tamper-Resistant, Split Circuit
- Assembled in USA

Ordering Information

| Description                                     | Device Color | UPC Number   | Catalog Number |
|-------------------------------------------------|--------------|--------------|----------------|
| Hospital Grade, Tamper-Resistant, Split Circuit | Ivory        | 783585552385 | SNAP2182ISCTRA |

Listings


UL Listed to UL498 File No. E2336  
Certified to CSA, C22.2, No. 42 File 435  
Fed. Spec. W-C-746  
NEMA® WD-6 Compliant

Specifications

|                |       |
|----------------|-------|
| Face           | Nylon |
| Base           | Nylon |
| Line Contact   | Brass |
| Ground Contact | Brass |

Performance

| Electrical             |                                                          |
|------------------------|----------------------------------------------------------|
| Current Interrupting   | Certified for current interrupting at full rated current |
| Dielectric Voltage     | Withstands 2,000V minimum                                |
| Mechanical             |                                                          |
| Product Identification | Ratings are a permanent part of the device               |
| Environmental          |                                                          |
| Flammability           | UL 94V-2                                                 |
| Operating Temperature  | Maximum continuous 75°C; minimum -40°C (without impact)  |

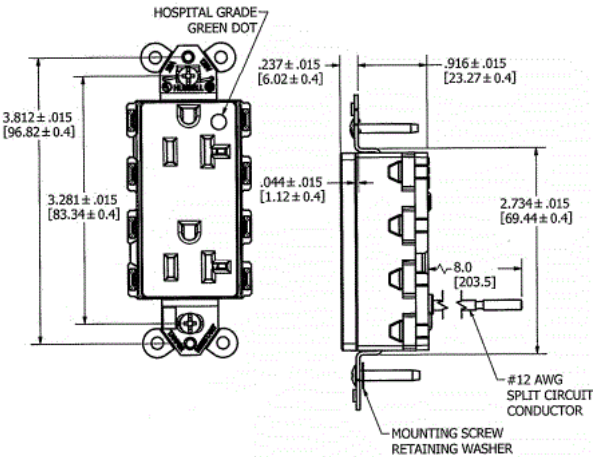

Complementary Products

Wallplate or Weatherproof Cover  
Opening

Online Resources

Customer Sales Drawing  
eCatalog  
Installation Instructions

