

Product data sheet

Specifications



Fixing base, Harmony XVB, for modular tower lights, plastic, 70mm, 780mm black aluminium support tube + black fixing plate

XVBZ04

! Discontinued

! Discontinued on: Jun 30, 2025

Product availability: Stock - Normally stocked in distribution facility

Main

| | |
|---------------------------------------|-------------------------------------|
| Range of Product | Harmony XVB |
| Accessory / separate part designation | Fixing base |
| Product or Component Type | Fixing base |
| Accessory / separate part category | Mounting and fixing accessories |
| Accessory / separate part destination | Beacons and indicator banks Ø 70 mm |

Complementary

| | |
|--------------------------------|--|
| Accessory / Separate Part Type | Fixing base |
| Product Compatibility | XVBC. XVBL. |
| Kit composition | Black plastic fixing plate Ø 25 mm aluminium support tube |
| Height under base unit | 30.7 in (780 mm) |
| Color | Black aluminium |
| Net Weight | 0.717 lb(US) (0.325 kg) |

Ordering and shipping details

| | |
|-------------------|---------------|
| Category | US100XV22616 |
| Discount Schedule | 00XV |
| GTIN | 3389110673678 |
| Returnability | Yes |
| Country of origin | CZ |

Packing Units

| | |
|------------------------|-----------------------|
| Unit Type of Package 1 | PCE |
| Nbr. of units in pkg. | 1 |
| Package 1 Height | 2.76 in (7.000 cm) |
| Package 1 Width | 3.15 in (8.000 cm) |
| Package 1 Length | 32.68 in (83.000 cm) |
| Package weight(Lbs) | 11.358 oz (322.000 g) |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| | |
|-------------------------------------|---------------------------|
| Unit Type of Package 2 | P12 |
| Number of Units in Package 2 | 50 |
| Package 2 Height | 11.81 in (30.000 cm) |
| Package 2 Width | 31.50 in (80.000 cm) |
| Package 2 Length | 47.24 in (120.000 cm) |
| Package 2 Weight | 61.950 lb(US) (28.100 kg) |

Contractual warranty

Warranty 18 months



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)

4

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

Yes

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

SCIP Number

124e2d7a-5b1e-45ca-b93c-220dd91b55b6

REACH Regulation

[REACH Declaration](#)

California proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture

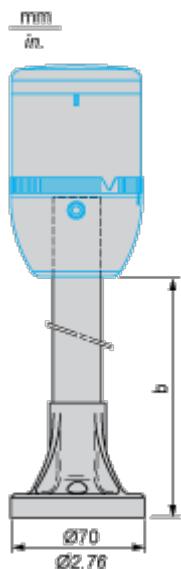
Circularity Profile

No need of specific recycling operations

Take-back

No


Dimensions Drawings

Dimensions and Mounting

Height under base unit

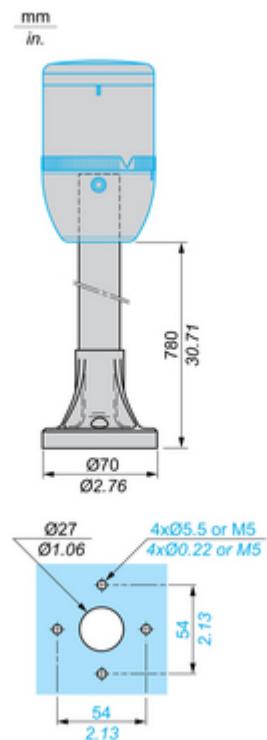
| b in mm | b in in. |
|---------|----------|
| 780 | 30.71 |

Mounting and Clearance

Panel Cut-Out

Technical Illustration

Dimensions



Offer Marketing Illustration

Product benefits / Features

Features

Harmony XVB



- 3 types of light source:** 10-Watt incandescent bulb, built-in high-efficiency LEDs, 5 and 10-joule discharge tube
- 100,000 hours of maintenance-free lighting** thanks to "LED Protected" technology
- Connector with removable base,** axial, or side cable entry, immediate assembly, and fixing using a locking ring
- High degree of protection** (IP66) and Shock resistance (IK05)
- Fully flexible and interchangeable** construction of up to 5 lens units (six colors of light lens unit)

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XVB

Robust product performance with high IP protection and IK05 shock resistance



Greater loudness up to 90dB with continuous and intermittent tones



Conformity with International standards

Beacon lens on top with high intensity 5J, 10J Xenon flash, increase visibility from top and surrounding

Image of product / Alternate images

Alternative





