

Product data sheet

Specifications



Socket-outlet, X Series, 15A, decorator, tamper resistant, lighted, residential, light almond, matte finish

SQR57101LA

Product availability: Stock - Normally stocked in distribution facility

Main

Range	Square D X Series
Product or Component Type	Socket-outlet
Aesthetic name	X Series
Device Application	Power supply
Device presentation	Mechanism with fixing frame
Body type	Decorator
Socket number	2
Outlet poles configuration	2P + E
Outlet standard	NEMA
Socket additional information	Tamper resistant

Complementary

Device mounting	Flush
Mounting Mode	By screws
Device Composition	Light indicator
[Ie] rated operational current AC	15 A
[Ue] rated operational voltage	125 V
Network type	AC
Network Frequency	60 Hz
Light source	LED
Light source colour	Warm white 2700 K
Number of gangs	1 gang
Number of modules	1
Color	Light almond
Surface Finish	Matte
Material	Plastic: strap Metal: fixing frame
Connections - terminals	Phase and neutral 4 screw terminal AWG 14...AWG 12) copper Phase and neutral 4 push-in termination AWG 14), solid copper Earth 1 screw terminal copper
Earth circuit	Self earthing
Width	1.7 in (42 mm)
Height	4.06 in (103 mm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Depth	1.4 in (35 mm)
Quantity per Set	1 piece

Environment

Product Certifications	cULus
Standards	UL 498

Ordering and shipping details

Category	US10DE909931
Discount Schedule	0DE9
GTIN	785901549161
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	4.2 in (10.6 cm)
Package 1 Width	2.1 in (5.4 cm)
Package 1 Length	2.2 in (5.5 cm)
Package weight(Lbs)	5.3 oz (150 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	4.4 in (11.3 cm)
Package 2 Width	4.6 in (11.7 cm)
Package 2 Length	11.02 in (28.0 cm)
Package 2 Weight	2.963 lb(US) (1.344 kg)
Unit Type of Package 3	CAR
Number of Units in Package 3	40
Package 3 Height	11.8 in (30.0 cm)
Package 3 Width	9.4 in (24.0 cm)
Package 3 Length	10.08 in (25.6 cm)
Package 3 Weight	14.057 lb(US) (6.376 kg)

Contractual warranty

Warranty	2 years
----------	---------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: carbon black, which is known to the State of California to cause cancer, and Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Use Again

Repack and remanufacture

Take-back	No
-----------	----

Technical Illustration

Wiring diagram

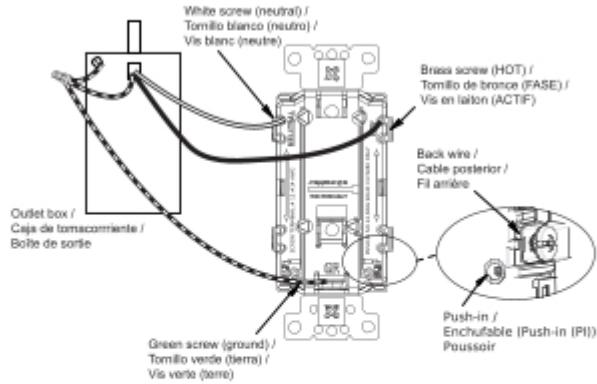

About wire connections : /
Sobre conexiones del cable : /
À propos de connexions de fils : /

5/8 in. (15.875 mm) /
5/8 pulgadas (15,9 mm) /
5/8 po (15,875 mm)



Side wire / cable lateral / fil latéral

Back wire / conductor posterior / fil arrière arrêté

Push-in / enchufable (push-in IP1) / pousser



Side wire / cable lateral / fil latéral

Clockwise, 2/3 of the way around the screw. /

Hacia la derecha, a 2/3 alrededor del tornillo. /

Dans le sens horaire, aux 2/3 du tour de vis.

Image of product / Alternate images

Alternative



