

Product data sheet

Specifications

SQUARE D



Meter socket, ringless socket, no bypass, 125 A, 600 VAC, 1 phase, 4 jaws, no jaw release, OH/UG

UTRS101B

Product availability: Stock - Normally stocked in distribution facility

Main

Product or Component Type	Meter Socket
Meter socket type	Ringless
Hub type	A ACP closing plate

Complementary

Meter socket rated current	125 A
Number of jaws	4 without jaw release
Bypass type	No bypass
Phase	1 phase
[Ue] rated operational voltage	600 V AC
Enclosure Material	Steel
Box number	1R
Electrical connection	Lugs slotted
Service feed location	OH
Wiring configuration	3-wire
Device mounting	Surface
AWG gauge	AWG 8...AWG 2/0 1 aluminium/copper)line AWG 14...AWG 2 1 aluminium/copper)service ground
Height	10.88 in (276.35 mm)
Width	8.00 in (203.20 mm)
Depth	3.50 in (88.90 mm)

Environment

Product Certifications	UL Listed
Enclosure Rating	NEMA 3R

Ordering and shipping details

Category	US10DE400039
Discount Schedule	ODE4
GTIN	785901626633
Returnability	Yes
Country of origin	US

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	4.700 in (11.938 cm)
Package 1 Width	8.700 in (22.098 cm)
Package 1 Length	12.500 in (31.750 cm)
Package weight(Lbs)	6.900 lb(US) (3.130 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	108
Package 2 Height	40.000 in (101.600 cm)
Package 2 Width	40.000 in (101.600 cm)
Package 2 Length	48.000 in (121.920 cm)
Package 2 Weight	785.199 lb(US) (356.160 kg)

Contractual warranty

Warranty	18 months
----------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Under investigation
California proposition 65	<p>WARNING: This product can expose you to chemicals including: Nickel (Metallic), which is known to the State of California to cause cancer, and Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov</p>


Use Again

Repack and remanufacture

Take-back	No
-----------	----

Dimensions Drawings

Approximate Dimensions

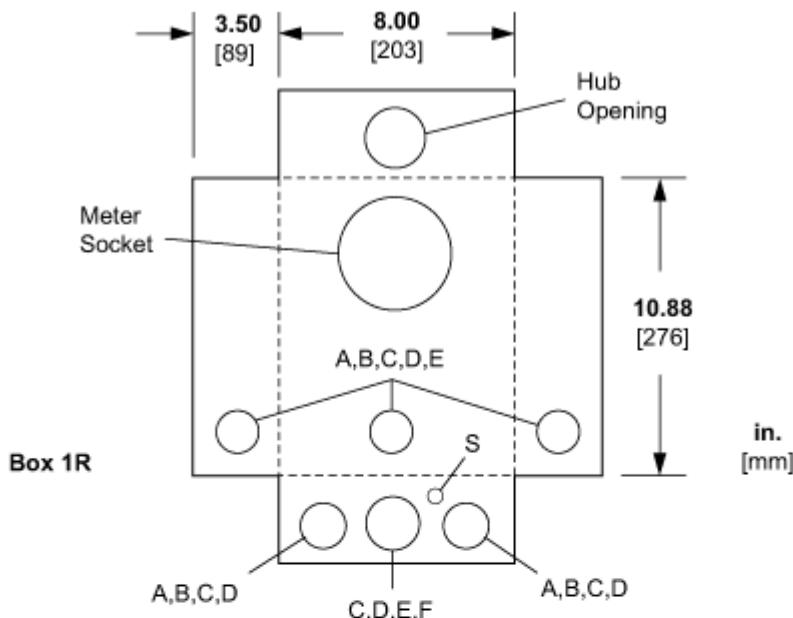

Knockouts

Symbol	A	B	C	D	E	F	S *
Conduit size (in.)	1/2	3/4	1	1-1/4	1-1/2	2	5/16

* Knockout for grounding conductor

Hubs

(Series A - listed by conduit size)

Description	Catalog No.
1.00 in.	A100
1.25 in.	A125
1.50 in.	A150
2.00 in.	A200
2.50 in.	A250

Closing Plates

(to seal hub openings)

Description	Catalog No.
Steel	ACP
Aluminum	ACPA