




Gas Station Canopy

Surface Mount

150 Watt

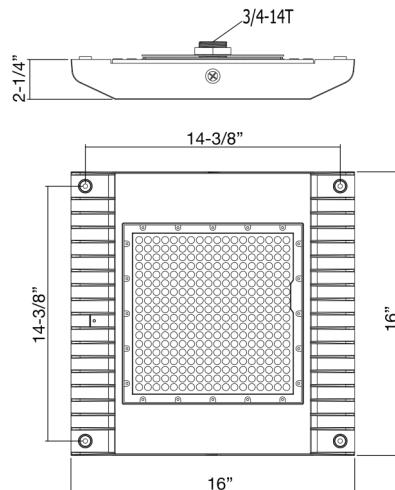

Features:

Directed Optics - Wide Angle

Surface Mount

Thin Appearance

0-10V/PMW Dimming




Good Heat Dissipation

Long Life high Efficiency LEDs

Perfect for Replacement of Traditional Canopies

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Dimming	Light Pattern	Lumens/Watt	DLC#
71412	White	150	22,345	5000	120-277	1-10V/PWM/VR	115° x 115°	136	PLF0O0I1WL3Q

PHOTOMETRY

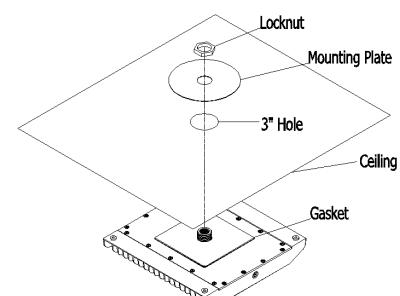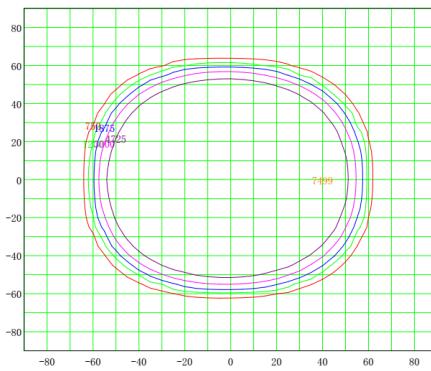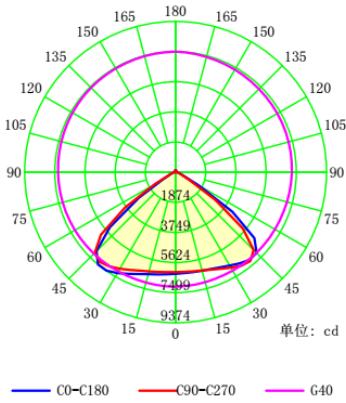



Gas Station Canopy

Surface Mount

150 Watt

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277
Current: 1.24A @ 120V; .57A @ 277V
Frequency: 60Hz
Power Factor: ≥.92
THD: 8.56 @ 120V; 14.01 @ 277V

Operating Temperature: -40°F - +131°F

Construction:

Housing: ADC12 Aluminum Alloy
Powder Coated
IP Rating: IP65 suitable for wet locations

Product Parameters:

Watts: 150
Lumens: 22,345
Efficacy: 136 lumens per watt
50,000+ LED Life Span
CCT: 5000k (Cool White)

Lens Material: High Light Transmittance Polycarbonate

UV Resistant
Fire Resistant

Mounting: Surface Mount

Listings: UL Listed: E474299

DLC#: PLF0001WL3Q

Chromacity Measurements:

Beam Angle: 126°
BUG Rating: B4-U2-G1
CRI: >74
R9: 0
DUV: .0014
Chromaticity (x,y): x=.3267; y= .3315
Chromaticity (u,v): x=.2066; y= .4717

Carton Qty: 1

Weight: 16lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

Component Specifications:

LED: LumiLEDs 3030
Driver: 100-277V 50-60HZ
Driver Output Volts: 38-46V
Driver Output Amps: 2.16-3.6A
10KV Surge Protection

Dimming: 0-10V/PWM