

BX, Flex, NM and MC Cable Connectors

Snap-In Set Screw Type with Insulated Throat

Features

- No locknut required
- Single-unit or duplex construction with captive clamp
- Applicable third party standards - UL Standards: 514B Fed. Spec. W-F-406E

Applications

- Use to join sheathed cable into outlet boxes or enclosures

Standard Material



- Steel

Standard Finish

- Zinc plated

Applicable Third Party Standards

- UL Standard: UL 514B
- Fed. Spec: W-F-406E

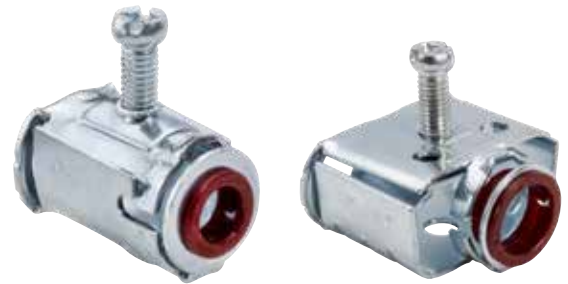

Catalog Number	UPC	KO	Unit Carton	Ship Case	Weight/Case	A	Inches B	C
AMC1	33770	1/2"	50	500	38	1.39	.844	.846
AMC2	33771	3/4"	25	250	48	1.63	1.88	.522
AMC12	33772	1/2"	25	250	14	1.52	.916	.868

Cable Type	AMC1-1/2" KO	AMC2-3/4" KO	AMC12-1/2" KO*
AC STEEL	14/2, 14/3, 14/4, 12/2 12/3, 12/4, 10/2, 10/3	10/4, 10/5, 8/3, 8/4 6/3	14/2, 14/3, 14/4, 12/2 12/3, 12/4
AC ALUMINUM	14/2, 14/3, 14/4, 12/2 12/3, 12/4	10/4, 8/2, 8/3, 8/4	14/2, 14/3, 14/4, 12/2 12/3, 12/4
MC STEEL	14/2, 14/3, 14/4 12/2, 12/3, 12/4 10/2	10/3, 10/4, 8/2	14/2, 14/3, 14/4, 12/2 12/3, 12/4, 10/2, 10/3
MC ALUMINUM INTERLOCKED	14/2, 14/3, 14/4, 12/2 12/3, 12/4, 10/2	10/3, 10/4, 8/2	14/2, 14/3, 14/4, 12/2 12/3, 12/4, 10/2, 10/3
MC ALUMINUM	14/3, 14/4, 12/2 12/3, 12/4, 10/2, 10/3		
MC ALUMINUM FLEX	12/3		
FLEX-RW	3/8" Steel & Aluminum		
MC-PCS ALUMINUM	12/2 - 12/3	12/2 - 10/3	12/2 - 12/3
MC-PCS STEEL	12/2 - 12/3	12/2 - 10/3	12/2 - 12/3
MCI-A	.410-.610 12/2,12/3,12/4,12/8,10/4		.410-.610 14/3,14/4,12/2,12/3

*Accepts 2 cables of each size listed.