

# Product data sheet

Specifications

SQUARE D



## QOM2 Circuit Breaker Enclosure, 2P, Type 3R, 100-225A, UL

QOM22225NRB

**Product availability:** Stock - Normally stocked in distribution facility

### Main

Product Type Enclosure

Range of Product QO

### Complementary

Current Rating 225 A

Number of Poles 2P

Enclosure Rating NEMA 3R outdoor

Breaker Compatibility Circuit breaker QOM2

Product Certifications UL

Voltage Rating 240 V CA

Tightening Torque  
50 lb.in, AWG 3...AWG 2/0  
45 lb.in, AWG 6...AWG 4  
40 lb.in, AWG 8  
35 lb.in, AWG 14...AWG 10

Enclosure Material Steel

Height 24.8 in (629 mm)

Width 8.5 in (217 mm)

Depth 4.2 in (106 mm)

### Ordering and shipping details

Category US1DE2A00005

Discount Schedule DE2A

GTIN 785901328872

Returnability Yes

Country of origin MX

### Packing Units

Unit Type of Package 1 PCE

Nbr. of units in pkg. 1

Package 1 Height 4.00 in (10.160 cm)

Package 1 Width 5.50 in (13.970 cm)

Package 1 Length 6.40 in (16.256 cm)

Package weight(Lbs) 14.341 lb(US) (6.505 kg)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

---

<b>Unit Type of Package 2</b>	PAL
<b>Number of Units in Package 2</b>	42
<b>Package 2 Height</b>	40.00 in (101.600 cm)
<b>Package 2 Width</b>	40.00 in (101.600 cm)
<b>Package 2 Length</b>	48.00 in (121.920 cm)
<b>Package 2 Weight</b>	604.0010 lb(US) (273.970 kg)

---

## Contractual warranty

---

<b>Warranty</b>	18 months
-----------------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	23
--	----

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Under investigation
REACH Regulation	<a href="#">REACH Declaration</a>
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
Halogen content performance	Halogen free plastic parts product
PVC free	Yes

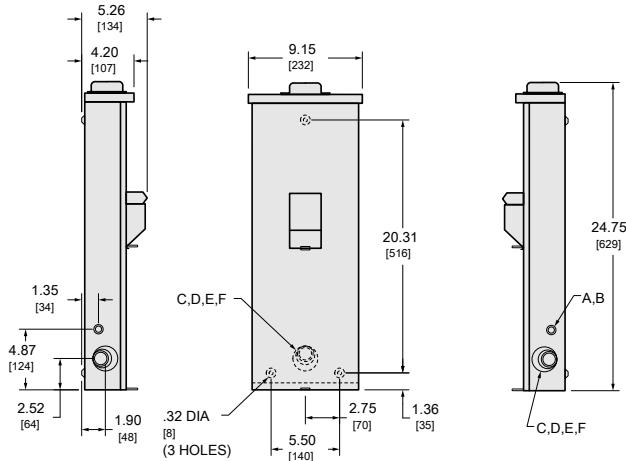

## Use Again

### Repack and remanufacture

Circularity Profile	No need of specific recycling operations
Take-back	No

## Technical Illustration

## Dimensions

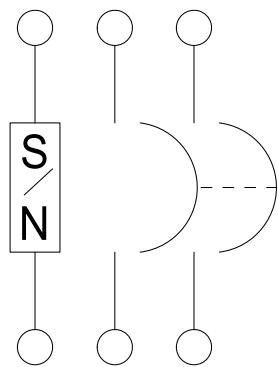
IN.  
[mm]

KNOCKOUTS				
SYMBOL	CONDUIT SIZE		DIAMETER	
	IN	MM	IN	MM
A	.50	13	.88	22
B	.75	19	1.13	29
C	1.00	25	1.38	35
D	1.25	32	1.75	45
E	1.50	38	2.00	51
F	2.00	51	2.50	64

All dimensions are approximate. Refer to technical drawings and documentation.

Technical Illustration

Wiring diagram



QOM22225NRB