





Morris CAT#: 71901B

4' LED Linear Vapor Tight 40 WATT, 3.5K-5K, 120-277V




Features:

- 0-10V Dimming
- Polycarbonate Lens with high flame retardant paint
- Heavy Duty Polycarbonate Housing & Stainless Steel Clips
- High Quality LED chips provide high efficiency
- Surface Mount Brackets Included
- 50,000+ Hour LED Life Expectancy
- IP65 Wet Location Rated
- Listing: cULus
- 5 Year Warranty

| Part# | Housing Color | Wattage | Lumens | CCT | Voltage | Beam Angle | Lumens/Watt | |
|--------|---------------|---------|--------|---------|---------|-------------|-------------|--|
| 71901B | White | 40 | 4800 | 3.5K-5K | 120-277 | 106° x 133° | 130 | |

Photometry:

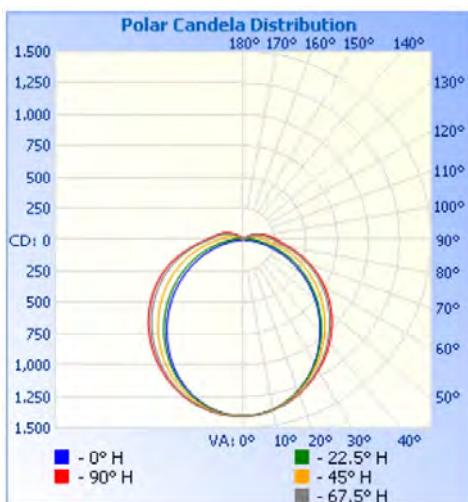

Knockouts:



Side Knockout



Side Knockout with pre-installed cord grip



Center Knockouts

Morris CAT#: 71901B

4' LED Linear Vapor Tight 40

WATT, 3.5K-5K, 120-277V

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277
Current: .032A @ 120V
Frequency: 60Hz
Power Factor: ≥0.9
THD: >.20% @ 120V

Operating Temperature:

Minimum Starting -22°F - 104°F

Product Parameters:

40 Watts
Efficacy: 130 lumens per watt
4800 lumens @ 3.5K/5K
5400 lumens @ 4K
50,000+ LED Life Span CCT:
3.5K-5K

Construction:

Housing: Polycarbonate Housing and Stainless Steel Clasps

IP Rating: IP65 Wet Location

Lens Material: Polycarbonate Diffused/Frosted Lens

Mounting: Surface Mount Brackets Included, Suspension Chain

Listings: cULus Listed

Carton Qty: 6

Weight: 3.5 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

Chromacity Measurements:

CRI: >80

R9: 0

DUV: 0.0031

Component Specifications:

LED: SMD2835

Driver: 100-277V 50-60HZ

Surge Protection Volts: 2.5KV

Dimming: 0-10V