

FUSE TABLE	
Overcurrent Protection, Fuse Required Class	Maximum Amp Rating
Class J	110A
Class T	110A
Class RK1	60A
Class RK5	30A
Class G	60A
Class CC	30A




FEATURES:

- 1. AVAILABLE IN FINGER SAFE STYLE MODEL ONLY THAT INCLUDE END PLATES AND HINGED COVER
- 2. FINGER SAFE TO IP20. PER. IEC60529
- 3. cULus LISTED TO UL 1953 AND 1059
- 4. AL9CU RATED FOR USE T=WITH COPPER OR ALUMINUM CONDUCTOR CLASS B & C, AND OPERATING TEMP OF 90C
- 5. VOLTAGE RATING 600 V
- 6. DEFAULT SCCR (SHORT CIRCUIT CURRENT RATING) WITH CORRECT FUSING = 100kA
- 7. QUICK RELEASE LOCKING MECHANISM TO DISCONNECT FROM STD.35MM DIN RAIL
- 8. OVAL ALIGN MOUNTING HOLE AT BASE ON EITHER WIRE ENTRY END
- 9. MATERIAL: COVER AND END PLATES = LEXAN 500R POLYCARBONATE
- 10. MATERIAL: BASE AND SIDE PANELS = VAALOX NYLON 6/6 GF30%
- 11. MATERIAL: CONNECTOR BLOCK 6061T6 ALUMINUM TIN PLATED
- 12. MATERIAL: WIRE PORT SCREWS, STEEL TIN PLATED
- 13. MATERIAL: CONNECTOR TO BLOCK SECURITY SCREW, STEEL TIN PLATED
- 14. MULTI-PORT GANDING OF SAME SIZE BLOCK (SML, MED, LRG)
- 15. MAXIMUM AMPACITY PER POLE = 475A
- 16. PRIMARY (LINE, RUN, MAIN) SIDE = 750 MCM
- 17. PRIMARY MAXIMUM TORQUE VALUE = 442 IN.LBF
- 18. PRIMARY STRIP LENGTH = 1.732"
- 19. MAXIMUM AMPACITY PER POLE = 475A
- 20. SECONDARY (LINE, RUN, MAIN) SIDE = 750 MCM
- 21. SECONDARY MAXIMUM TORQUE VALUE = 442 IN.LBF
- 22. SECONDARY STRIP LENGTH = 1.732"


NOTES:

1. DIMENSIONS IN BRACKETS [] ARE IN MM ROUNDED OFF TO THE NEAREST MM, UNLESS OTHERWISE SPECIFIED AND ARE FOR REFERENCE ONLY
2. MATERIALS: BASE, POLE SEPARATING SIDE AND LOCK - NYLON 66 GF30% BLOCK AND RETENTION SCREWS - TIN PLATED ALUMINUM FINGER SAFE COVERS - POLYCARBONATE
3. BLOCK MOUNTING HARDWARE - STAINLESS STEEL
4. MAY BE USED IN ANY NUMBER OF POLES REQUIRED.


REV	DATE	REVISED	BY	ECN	C'D
A		RELEASED			
B	8/31/23	UPDATED ITEM SPECIFICATION	DC	23-00015	SSM

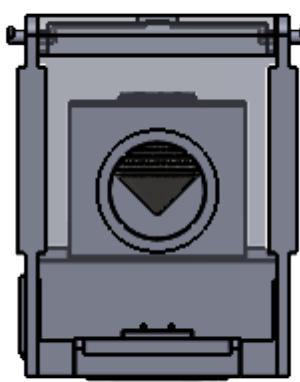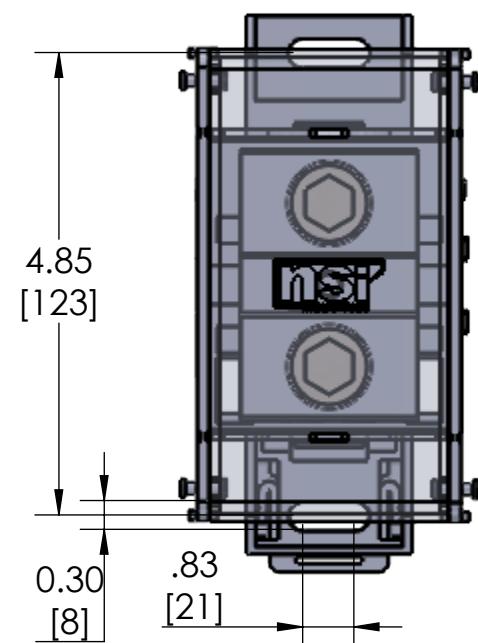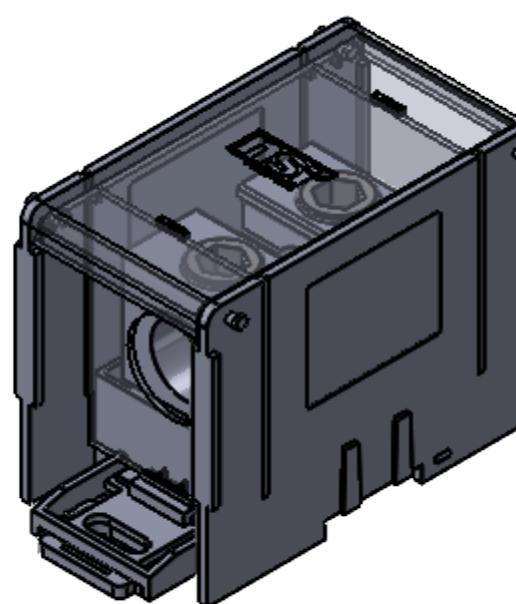

RUN SIDE

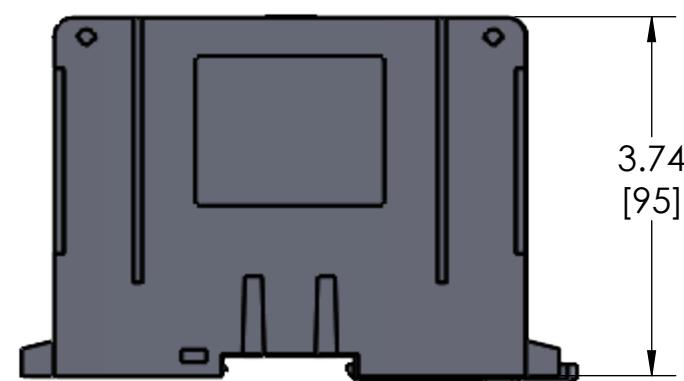

DIN RAIL STYLE

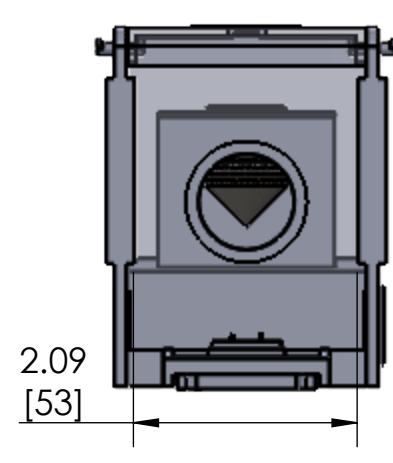

TAP SIDE

2: TORQUE VALUES

WIRE RANGE (MCM/AWG)	CONNECTOR SIZE									
	750	600	500	350	250	3/0	2/0	1/0	#2	#4
750 - 600	550	550								
500	550	450	450							
400	550	450	450							
350	550	400	400	400						
250	550	360	360	360	360					
4/0 - 3/0	550	250	250	250	250	250				
2/0	550	180	180	180	180	180	120			
1/0	550	180	180	180	180	180	80	80		
#1		150	150	150	150	150	65	65		
#2 - #3		150	150	150	150	150	65	65	65	
#4 - #6		150	110	110	110	110	55	55	35	35
#8				75			45	45	25	25
#10 - #14				35			25	25	15	15

NPDB -	11 -	750 -	1
NSI PRODUCT GROUP POWER DISTRIBUTION BLOCKS 1ST DIGIT = # OF PRIMARY COND. 2ND DIGIT = # OF SECONDARY COND.	MAXIMUM WIRE SIZE		NUMBER OF POLES

PROPRIETARY AND CONFIDENTIAL	NAME	DATE	NSI
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NSI Industries, INC.	DRAWN	DC 8/31/23	
REPRODUCTION IN PART OR AS A WHOLE	CHECKED	SSM 8/31/23	
WITHOUT WRITTEN PERMISSION OF NSI Industries, INC. IS PROHIBITED.	ENG APPR.		
DECIMAL FRACTION 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000	MFG APPR.		
ANGLES 0° 15° 30° 45° 60° 75° 90° 105° 120° 135° 150° 165° 180° 195° 210° 225° 240° 255° 270° 285° 295° 300° 315° 330° 345° 360°	Q.A.		
DO NOT SCALE DRAWING	COMMENTS:		
MADE	TO ORDER NSI PRODUCTS CALL		
FINISH	UNITED STATES		
SEE NOTES	(704) 439-2420		
SEE NOTES	FOR PRODUCT INFO:		
DIMENSIONS ARE IN INCHES	www.nsindustries.com		