THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE		DIMENSIONS in. [mm]					
	AWG [mm²]	[mm²]	∅ ±.02 [0.4]	L ±.02 [0.5]	H ±.02 [0.5]	W ±.02 [0.5]	C ±.02 [0.4]	M ±.02 [0.6]
EQSP18D	#22-16	0.5-1.5	.13 [3.3]	.76 [19.4]	.30 [7.6]	.46 [11.7]	.33 [8.5]	1.30 [33.0]

NOTES:

1. UL LISTED FOR:
   A. STRANDED COPPER WIRE ONLY
   B. 221°F [105°C] MAX. OPERATING TEMPERATURE
   C. 600 V. MAX VOLTAGE RATING

2. MATERIAL:
   A. STAMPING: .019" [0.5] THICK BRASS, TIN PLATED
   B. HOUSING: POLYPROPYLENE, RED

3 SEE www.panduit.com FOR PACKAGE QUANTITIES

4. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

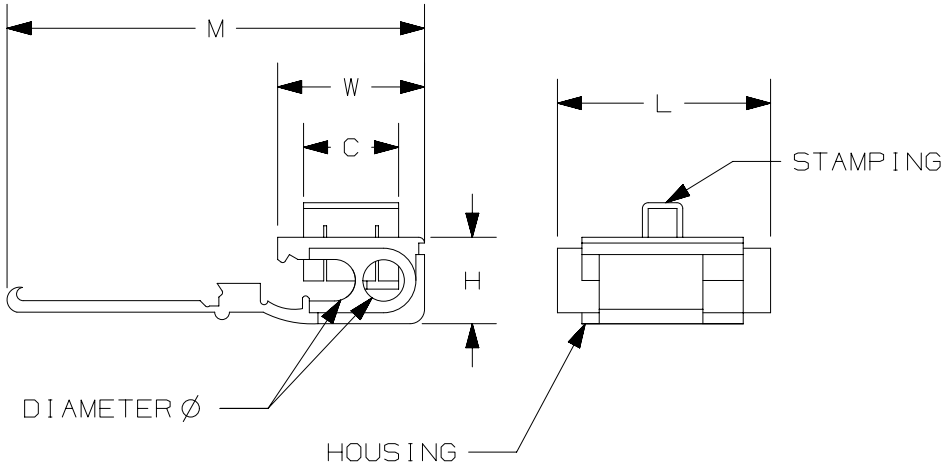

c UL us
LISTED
20U0
E52164

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	DRAWING RELEASED	00123SS

TITLE
STRONGHOLD QUICK SPLICE CONNECTOR
INSULATION DISPLACEMENT #22-16 AWG
CUSTOMER DRAWING

ITEM REVISION NAME: 00123SST/00
DATASET FILE NAME: 00123SST/00

PANDUIT

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.x ± .1 [2.54] .xxx ± .005 [.127]
.xx ± .01 [.25] ANGLES ± 5 °
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: 00123SST-DC

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
JHNU	-	-	N.T.S.		A

D10100DA/15